

REPORT NUMBER: NCAP-CAL-17-002

**NEW CAR ASSESSMENT PROGRAM (NCAP)
FRONTAL BARRIER IMPACT TEST**

**General Motors LLC
2017 Cadillac XT5
SUV**

NHTSA No: M20170110

**PREPARED BY:
CALSPAN CORPORATION
P.O. BOX 400
BUFFALO, NEW YORK 104625**



November 11, 2016

FINAL REPORT

**PREPARED FOR:
U. S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
OFFICE OF CRASHWORTHINESS STANDARDS
1200 NEW JERSEY AVE SE, ROOM W43-410
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Administration, in response to Contract Number DTNH22-12-D-00260.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof.

If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by: Vanessa Hansen
Vanessa Hansen, Senior Test Engineer

Date: November 11, 2016

Approved by: Edward J. Dutton
Edward J. Dutton, Operations Manager
Transportation Test Operations

Date: November 11, 2016

FINAL REPORT ACCEPTANCE BY OCWS:

Division Chief, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

COTR, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

TECHNICAL REPORT DOCUMENTATION PAGE

1. Report No. NCAP-CAL-17-002		2. Government Accession No.		3. Recipient's Catalog No.																																																					
4. Title and Subtitle Final Report of New Car Assessment Program Frontal Impact Testing of a 2017 Cadillac XT5 SUV NHTSA No.: M20170110				5. Report Date November 11, 2016																																																					
				6. Performing Organization Code CAL																																																					
7. Author(s) Vanessa Walsh, Senior Test Engineer Edward Dutton, Operations Manager				8. Performing Organization Report No. CAL-DOT-2017-002																																																					
9. Performing Organization Name and Address Calspan Corporation Transportation Test Operations P.O. Box 400 Buffalo, New York 104625				10. Work Unit No.																																																					
				11. Contract or Grant No. DTNH22-12-D-00260																																																					
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards (NRM-110) 1200 New Jersey Ave., SE, Room W43-410 Washington, D.C. 20590				13. Type of Report and Period Covered: Final Test Report October 12, 2016 - November 11, 2016																																																					
				14. Sponsoring Agency Code NRM-110																																																					
15. Supplementary Notes																																																									
16. Abstract A 56.30 km/h (35 mph), NCAP Frontal Impact Test was conducted on a 2017 Cadillac XT5 SUV in accordance with the specifications of the Office of Crashworthiness Standards Frontal NCAP Laboratory Test Procedure. This test was conducted to obtain data indicant of FMVSS 208, 212, 219 (partial), 301, and foot well intrusion performance. The test was conducted at Calspan Corporation's Transportation Test Operations facility in Buffalo, New York on October 12, 2016. The impact velocity of the vehicle was 56.56 km/h, and the ambient temperature at the barrier face at the time of impact was 21°C. The target vehicle's maximum post-test static crush was 334 mm at C3 to the left side of the front bumper. The test vehicle's occupant performance data is as follows:																																																									
<table border="1"> <thead> <tr> <th rowspan="2">Measurement Description</th> <th rowspan="2">Units</th> <th colspan="2">Driver ATD (Serial No. 1046)</th> <th colspan="2">Passenger ATD (Serial No. 288)</th> </tr> <tr> <th>Threshold</th> <th>Result</th> <th>Threshold</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC₁₅)</td> <td></td> <td>700</td> <td>238.620</td> <td>700</td> <td>317.720</td> </tr> <tr> <td>Maximum Chest Compression</td> <td>mm</td> <td>63</td> <td>-18.037</td> <td>52</td> <td>-17.453</td> </tr> <tr> <td>Nij</td> <td></td> <td>1</td> <td>0.260</td> <td>1</td> <td>0.518</td> </tr> <tr> <td>Neck Tension</td> <td>N</td> <td>4,170</td> <td>880.494</td> <td>2,620</td> <td>1117.898</td> </tr> <tr> <td>Neck Compression</td> <td>N</td> <td>4,000</td> <td>-90.367</td> <td>2,520</td> <td>-197.349</td> </tr> <tr> <td>Left Femur Force</td> <td>N</td> <td>10,008</td> <td>-541.704</td> <td>6,805</td> <td>-66.758</td> </tr> <tr> <td>Right Femur Force</td> <td>N</td> <td>10,008</td> <td>-1851.422</td> <td>6,805</td> <td>-365.754</td> </tr> </tbody> </table>						Measurement Description	Units	Driver ATD (Serial No. 1046)		Passenger ATD (Serial No. 288)		Threshold	Result	Threshold	Result	Head Injury Criteria (HIC ₁₅)		700	238.620	700	317.720	Maximum Chest Compression	mm	63	-18.037	52	-17.453	Nij		1	0.260	1	0.518	Neck Tension	N	4,170	880.494	2,620	1117.898	Neck Compression	N	4,000	-90.367	2,520	-197.349	Left Femur Force	N	10,008	-541.704	6,805	-66.758	Right Femur Force	N	10,008	-1851.422	6,805	-365.754
Measurement Description	Units	Driver ATD (Serial No. 1046)		Passenger ATD (Serial No. 288)																																																					
		Threshold	Result	Threshold	Result																																																				
Head Injury Criteria (HIC ₁₅)		700	238.620	700	317.720																																																				
Maximum Chest Compression	mm	63	-18.037	52	-17.453																																																				
Nij		1	0.260	1	0.518																																																				
Neck Tension	N	4,170	880.494	2,620	1117.898																																																				
Neck Compression	N	4,000	-90.367	2,520	-197.349																																																				
Left Femur Force	N	10,008	-541.704	6,805	-66.758																																																				
Right Femur Force	N	10,008	-1851.422	6,805	-365.754																																																				
17. Key Words 35 mph Frontal Barrier Impact Test New Car Assessment Program (NCAP)				18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services Division, NPO-411 1200 New Jersey Ave, SE Washington, DC 20590 e-mail: tis@nhtsa.dot.gov FAX: 202-493-2833																																																					
19. Security Class. (of this report) UNCLASSIFIED		20. Security Class. (of this page) UNCLASSIFIED		21. No. of Pages 160	22. Price																																																				

TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
1	Purpose and Summary of the Test	1-1
2	Occupant and Vehicle Information / Data Sheets	2-1
<u>Data Sheet</u>		<u>Page</u>
1	General Test and Vehicle Parameter Data	2-2
2	Seat Adjustment, Fuel System, and Steering Wheel Data	2-6
3	Dummy Longitudinal Clearance Dimensions	2-8
4	Dummy Lateral Clearance Dimensions	2-9
5	Seat Belt Positioning Data	2-10
6	High-Speed Camera Locations and Data	2-11
7	Vehicle Accelerometer Locations	2-13
8	Photographic Reference Target Locations	2-14
9	Load Cell Locations on Fixed Barrier	2-15
10	Test Vehicle Summary of Results	2-16
11	Post-Test Observations	2-17
12	Vehicle Profile Measurements	2-18
13	Accident Investigation Division Data	2-20
14	Vehicle Intrusion Measurements	2-21
15	Summary of FMVSS 212, 219 (Partial), and 301 Data	2-23
16	FMVSS 301 Static Rollover Results	2-25
17	Dummy/Vehicle Temperature Stabilization Chart	2-26
<u>Appendix</u>		<u>Page</u>
A	Photographs	A-1
B	Dummy Response Data Traces	B-1
C	Dummy Calibration and Performance Verification Data	C-1

SECTION 1

PURPOSE AND SUMMARY OF TEST

PURPOSE

This 56.3 km/h frontal barrier impact test is part of the Vehicle Barrier Impact Testing Program sponsored by the National Highway Traffic Safety Administration (NHTSA) under Contract No. DTNH22-12-D-00260. The purpose of this test was to obtain vehicle crashworthiness and occupant restraint system performance data for consumer information purposes.

The 56.3 km/h frontal barrier impact test was conducted in accordance with the Office of Crashworthiness Standards Frontal NCAP Laboratory Test procedure, dated October 2015.

SUMMARY

A ridged fixed barrier was impacted by a 2017 Cadillac XT5 SUV at a velocity of 56.56 km/h. The test was performed at Calspan Corporation's Transportation Test Operations facility in Buffalo, New York on October 12, 2016. Pre- and post-test photographs of the vehicle and dummies to document the test can be found in Appendix A. One real-time camera and 14 high-speed cameras were used to document the frontal barrier impact event. Camera locations and other pertinent camera information can be found in Data Sheet 6 of this report.

One Part 572E, 50th percentile male anthropomorphic test device (ATD), was placed in the driver seating position and one Part 572O 5th percentile female ATD was placed in the right-front passenger seating position according to dummy placement instructions specified in the Frontal NCAP Laboratory Test Procedure. Both ATDs were fully instrumented with head, chest and pelvis tri-axial accelerometers, chest displacement potentiometers, upper neck transducers, right / left femur load cells, and lower leg instrumentation. The driver (position 1) ATD (Serial No. 1046) and the right-front passenger (position 2) ATD (Serial No. 288) were calibrated previous to this test. Certification details, along with instrumentation calibration data, can be found in Appendix C of this report.

The 136 channels of data were recorded on an on-board data acquisition system. Please refer to Appendix B for the dummy response data traces.

There was 100 percent windshield retention and no intrusion into the protected zone of the windshield during the event. There was a total of 0.0 grams of stoddard solvent leakage after

the event and including all phases of the static rollover. The maximum static crush of the test vehicle was 334 mm at C3 to the left side of front bumper. During and after the impact event, the driver's and passenger's side doors were closed and operational.

The driver's visible contact points were as follows: The driver's head contacted the frontal airbag and then the head restraint. The upper torso contacted the frontal airbag. Both knees contacted the knee air bag.

The passenger's visible contact points were as follows: The passenger's head contacted the frontal airbag and then the head restraint. The upper torso contacted the frontal airbag. Both knees contacted the glove box.

The occupant data is summarized below.

ATD Position	HIC ₁₅	Nij	Neck Tension (N)	Neck Comp. (N)	3ms Chest Clip (Gs)	Chest Disp. (mm)	Left Femur (N)	Right Femur (N)
Driver (50 th)	238.620	0.260	880.494	-90.367	42.283	-18.037	-541.704	-1851.422
Passenger (5 th)	317.720	0.518	1117.898	-197.349	45.603	-17.453	-66.758	-365.754

GENERAL COMMENTS:

1. P1 (Driver) serial number - 1046
2. P2 (Passenger) serial number - 288

Data Anomalies:

- Engine Bottom X Acceleration, Questionable data 51.3ms to 59.5ms

SECTION 2

OCCUPANT AND VEHICLE INFORMATION / DATA SHEETS

This section contains information reporting for the following Data Sheets:

Data Sheet No. 1 – General Test and Vehicle Parameter Data

Data Sheet No. 2 – Seat Adjustment, Fuel System, and Steering Wheel Data

Data Sheet No. 3 – Dummy Longitudinal Clearance Dimensions

Data Sheet No. 4 – Dummy Lateral Clearance Dimensions

Data Sheet No. 5 – Seat Belt Positioning Data

Data Sheet No. 6 – High-Speed Camera Locations and Data

Data Sheet No. 7 – Vehicle Accelerometer Locations

Data Sheet No. 8 – Photographic Reference Target Locations

Data Sheet No. 9 – Load Cell Locations on Fixed Barrier

Data Sheet No. 10 – Test Vehicle Summary of Results

Data Sheet No. 11 – Post-Test Observations

Data Sheet No. 12 – Vehicle Profile Measurements

Data Sheet No. 13 – Accident Investigation Division Data

Data Sheet No. 14 – Vehicle Intrusion Measurements

Data Sheet No. 15 – Summary of FMVSS 212, 219 (Partial), and 301 Data

Data Sheet No. 16 – FMVSS 301 Static Rollover Results

Data Sheet No. 17 – Dummy/Vehicle Temperature Stabilization Chart

**DATA SHEET NO. 1
GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2017 Cadillac XT5 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20170110
 Test Date: 10/12/2016

TEST VEHICLE INFORMATION AND OPTIONS

NHTSA No.	M20170110
Model Year	2017
Make	Cadillac
Model	XT5
Body Style	SUV
VIN	1GYKNDRS2HZ148173
Body Color	Black
Odometer Reading (km /mi)	83.7 km / 52 mi
Engine Displacement (L)	3.6
Type / No. Cylinders	V6
Engine Placement	Transverse
Transmission Type	Automatic
Transmission Speeds	8-Speed
Overdrive	Yes
Final Drive	AWD
Roof Rack	No
Sunroof / T-Top	Yes
Running Boards	No
Tilt Steering Wheel	Yes
Power Seats	Yes
Anti-Lock Brakes (ABS)	Yes
Automatic Door Locks (ADLs)	Yes

Traction Control System (TCS)	Yes
Power Steering	Yes
Power Window Auto-Reverse	No
Driver Frontal Airbag	Yes
Driver Curtain Airbag	Yes
Driver Head/Torso Airbag	No
Driver Torso Airbag	No
Driver Torso/Pelvis Airbag	Yes
Driver Pelvis Airbag	No
Driver Knee Airbag	Yes
Front Pass. Frontal Airbag	Yes
Front Pass. Curtain Airbag	Yes
Front Pass. Head/Torso Airbag	No
Front Pass. Torso Airbag	No
Front Pass. Torso/Pelvis Airbag	Yes
Front Pass. Pelvis Airbag	No
Front Pass. Knee Airbag	No
Driver Pretensioner	Yes
Driver Load Limiter	Yes
Front Pass. Pretensioner	Yes
Front Pass. Load Limiter	Yes
Other	-

Does owner's manual provide instructions to turn off automatic door locks?

No

DATA FROM CERTIFICATION LABEL

Manufactured By	General Motors LLC
Date of Manufacture	08/16

GVWR (kg)	2722
GAWR Front (kg)	1350
GAWR Rear (kg)	1450

VEHICLE SEATING AND WEIGHT CAPACITY DATA


Measured Parameter	Front	Rear	Third	Total
Type of Seats	Bucket	Bench	-	
Number of Occupants	2	3	-	5
Capacity Wt. (VCW) (kg)				786
Cargo Wt. (RCLW) (kg)				136

DATA SHEET NO. 1 ... (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2017 Cadillac XT5 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20170110
 Test Date: 10/12/2016

Collect items circled in red, tire manufacturer, and tire name.

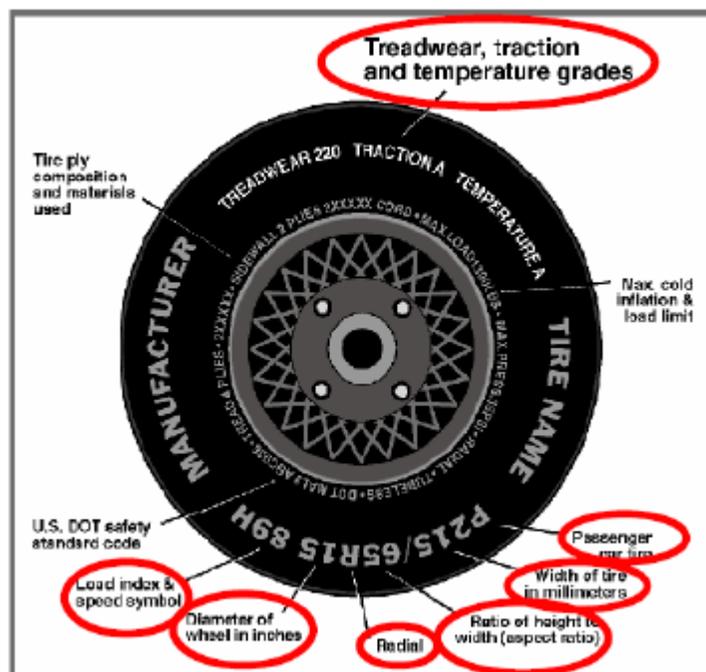

VEHICLE TIRE INFORMATION

Measured Parameter	Front	Rear
Maximum Tire Pressure (kPa)	300	300
Cold Pressure (kPa)	240	240
Recommended Tire Size	P235/65/R18	P235/65/R18
Tire Size on Vehicle	P235/65/R18	P235/65/R18
Tire Manufacturer	Michelin	Michelin
Tire Model	Premier LTX	Premier LTX
Treadwear	620	620
Traction	A	A
Temperature Grades	A	A
Tire Plies Sidewall	2 Polyester	2 Polyester
Tire Plies Body	1 Polyamide, 2 Steel, 2 Polyester	1 Polyamide, 2 Steel, 2 Polyester
Load Index / Speed Symbol	106H	106H
Tire Material	Rubber	Rubber
DOT Safety Code Left	M3MB7B5X2916	M3MB7B5X2916
DOT Safety Code Right	M3MB7B5X2916	M3MB7B5X2916

DATA SHEET NO. 1 ... (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2017 Cadillac XT5 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20170110
 Test Date: 10/12/2016

TEST VEHICLE WEIGHTS

	Units	As Delivered Weights (UVW)			As Tested Weights (ATW)		
		Front Axle	Rear Axle	Total	Front Axle	Rear Axle	Total
Left	kg	591	397		644	480	
Right	kg	559	385		573	509	
Ratio	%	60	40		55	45	
Totals	kg	1150	782	1932	1217	989	2206

TARGET TEST WEIGHT CALCULATION

Measured Parameter	Units	Value	
Total Delivered Weight (UVW)	kg	1932	(A)
Weight of 1 P572E ATD & 1 P572O ATD	kg	147	(B)
Rated Cargo / Luggage Weight (RCLW)	kg	136	(C)
Calculated Vehicle Target Weight (TVTW)	kg	2215	(A+B+C)

TEST VEHICLE ATTITUDES AND CG

Condition	Units	LF	RF	LR	RR	CG (aft of front axle)
As Delivered	mm	876	883	937	938	1157
As Tested	mm	871	871	895	895	1281
Post-Test	mm	940	948	893	893	

GENERAL TEST VEHICLE DATA

Measurement Description	Units	Value
Total Vehicle Wheel Base	mm	2858
Total Vehicle Length at Left Side	mm	4645
Total Vehicle Length at Centerline	mm	4820
Total Vehicle Length at Right Side	mm	4645
Weight of Ballast in Cargo Area	kg	79
Weight of Vehicle Components Removed	kg	40
Amount of Stoddard Solvent in Fuel Tank	L	72.9

LIST OF COMPONENTS REMOVED TO MEET TEST WEIGHT:

Trunk carpeting, pump kit, tail light, and hatch liner.

DATA SHEET NO.1 ... (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2017 Cadillac XT5 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20170110
 Test Date: 10/12/2016

TARGET VEHICLE STRUCTURAL MEASUREMENT

No.	Description	Pre-Test
1	Total Length	4820
2	Total Width	1870
3*	Bumper Top Height	595
4*	Bumper Bottom Height	486
5*	Longitudinal Member Top Height	622
6	Distance Between Longitudinal Members	1025
7	Longitudinal Member Width	66
8*	Engine Top Height	819
9*	Engine Bottom Height	229
10	Engine and Gearbox Width	483
11	Front Bumper-Engine Distance	547
12*	Front Shock Absorber Fixing Height	1002
13*	Bonnet Leading Edge Height	971
14	Front Shock Absorber Fixing Width	1214
15	Front Bumper – Front Axle Distance	991
16	Front Axle – A Pillar Distance	528
17	A-Pillar – B-Pillar Distance	1115
18	B-Pillar – Rear Axle Distance	1215
19	B-Pillar – C-Pillar Distance	988
20*	Roof Sill Bottom Height	1537
21*	Roof Sill Top Height	1582
22*	Floor Sill Bottom Height	391
23*	Floor Sill Top Height	451

*Height Measurements are taken from the ground
 Note: All measurements are in millimeters


DATA SHEET NO. 2
SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA

Test Vehicle: 2017 Cadillac XT5 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20170110
 Test Date: 10/12/2016

NOMINAL DESIGN RIDING POSITION

The driver's seat back was set to the manufacturer's designated angle. The passenger's seat back was positioned in a similar manner as the driver's seat back. Seat back angles are measured at the headrest post bezel using a digital inclinometer.

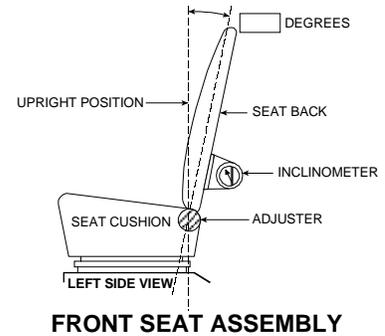

Seating Position	Degrees
Driver Seat Back Angle	16.3
Passenger Seat Back Angle	20

SEAT FORE / AFT POSITIONS


The driver's seat was positioned at the mid-point of fore/aft travel at its lowest position. The passenger's seat was positioned at the most forward position of fore/aft travel. Zero is defined as the forward most position.

Seating Position	Total Fore / Aft Travel	Placed in Position #
Driver Seat	322	161
Passenger Seat	320	0

SEAT BELT UPPER ANCHORAGE

The driver's seat belt anchorage was positioned according to the manufacturer's designated positioning for a 50th percentile adult male ATD. The passenger's seat belt anchorage was positioned according to the manufacturer's designated positioning for a 5th percentile adult female ATD. For this test zero is defined as the uppermost position.

Seating Position	Total # of Positions	Placed in Position #
Driver Seat	4	0 – Uppermost
Passenger Seat	4	0 – Uppermost

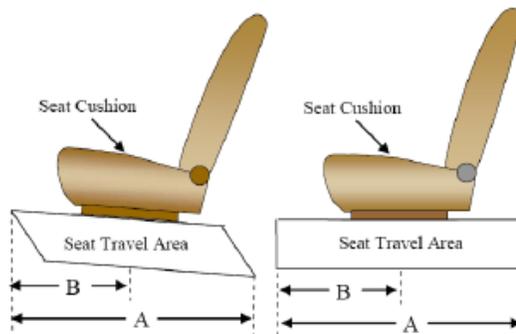

DATA SHEET NO. 2 ... (CONTINUED)
SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA

Test Vehicle: 2017 Cadillac XT5 SUV
 Test Program: NCAP Frontal Barrier Impact Test


NHTSA No.: M20170110
 Test Date: 10/12/2016

FUEL TANK CAPACITY

Description	Liters
Usable Capacity of "Standard Tank"	73.4
Usable Capacity of "Optional Tank"	78.4
92%-94% of Usable Capacity	72.12 – 73.7
Actual Amount of Solvent Used	72.9
1/3 of Usable Capacity	26.1


FUEL PUMP

The vehicle is equipped with an electric fuel pump. The fuel filler neck is on the left side of the vehicle. The pump creates positive pressure in the fuel lines, pushing the gasoline to the engine. See form 1 for more information.

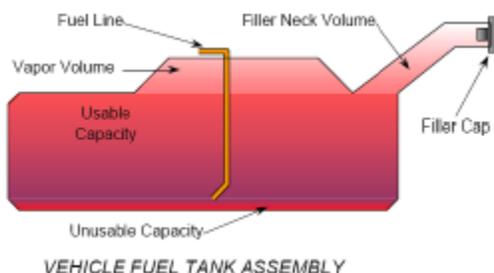

STEERING COLUMN ADJUSTMENT

Steering wheel and column adjustments are made so that the steering wheel hub is at the geometric center of the locus it describes when moved through its full range of motion. For angular measurements, a digital inclinometer was used to measure a plate which was placed across the steering wheel rim. A tape measure was used to measure the telescoping steering wheel travel.

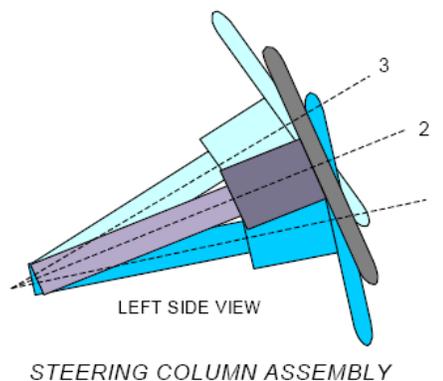


STEERING COLUMN POSITIONS

Description	Degrees	Fore / Aft Position (mm)
Lowermost position No. 1	20.2	
Geometric center position No. 2	22.5	
Uppermost position No. 3	24.8	
Telescoping Steering Wheel Travel		50
Test Position	22.5	25

DATA SHEET NO. 3
DUMMY LONGITUDINAL CLEARANCE DIMENSIONS

Test Vehicle: 2017 Cadillac XT5 SUV
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20170110
Test Date: 10/12/2016

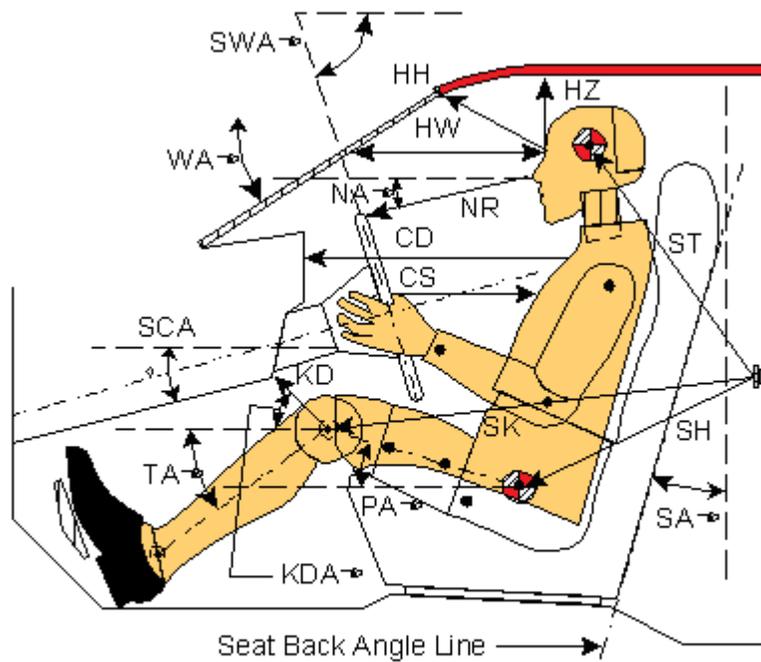


Left Side View

Code	Measurement Description	Driver (SN: 1046)		Passenger (SN: 288)	
		Length (mm)	Angle (°)	Length (mm)	Angle (°)
WA°	Windshield Angle		26.1		
SWA°	Steering Wheel Angle		22.1		
SCA°	Steering Column Angle		67.9		
SA°	Seat Back Angle (on headrest post)		16.5		20
HZ	Head to Roof (Z)	235	90	256	90
HH	Head to Header	465	24.3	380	39
HW	Head to Windshield	849	0	735	0
NR	Nose to Rim	443	4.8	454	30.1
CD	Chest to Dash	577		395	
CS	Chest to Steering Hub	365	4.8		
RA	Rim to Abdomen	245	0		
KDL	Left Knee to Dash	220	28.4	135	46.8
KDR	Right Knee to Dash	210	27.4	135	43.6
PA°	Pelvic Angle		24.6		21.8
TA°	Tibia Angle		28.3		45
SK	Striker to Knee	574	4.9	655	3.1
ST	Striker to Head	500	85.2	507	65.2
SH	Striker to H-Point	240	33.4	347	16.8

DATA SHEET NO. 4
DUMMY LATERAL CLEARANCE DIMENSIONS

Test Vehicle: 2017 Cadillac XT5 SUV
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20170110
Test Date: 10/12/2016

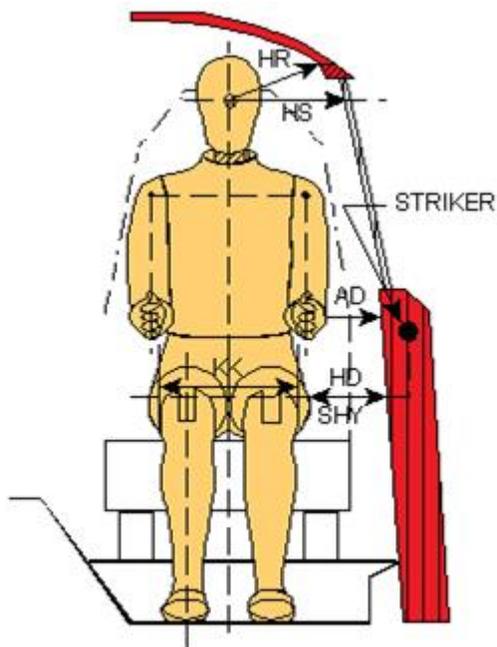


Front View

Code	Description	Driver (mm)	Passenger (mm)
AD	Arm to Door	144	85
HD	H-Point to Door	158	184
HR	Head to Side Header	248	270
HS	Head to Side Window	374	390
KK	Knee to Knee	343	168
SHY	Striker to H-Point (Y Direction)	240	260
AA	Ankle to Ankle	383	168

**DATA SHEET NO. 5
SEAT BELT POSITIONING DATA**

Test Vehicle: 2017 Cadillac XT5 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20170110
 Test Date: 10/12/2016

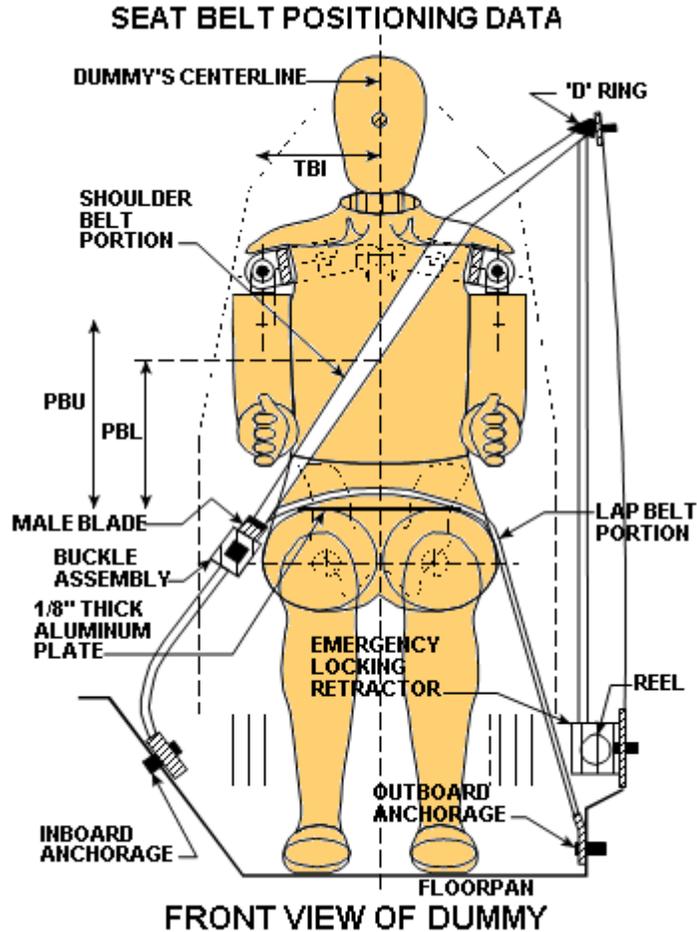

SEAT BELT POSITIONING MEASUREMENTS

Measurement Description	Units	Driver	Passenger
PBU — Top surface of reference to belt upper edge	mm	330	305
PBL — Top surface of reference to belt lower edge	mm	250	225

BELT LENGTH DATA


Measurement Description	Units	Driver	Passenger
Shoulder belt length as measured on ATD	mm	820	880
Lap Belt Length as measured on ATD	mm	440	460
Remainder of belt on reel	mm	1040	960
Total belt length for continuous webbing systems	mm	2300	2300

**DATA SHEET NO. 6
HIGH-SPEED CAMERA LOCATIONS AND DATA**

Test Vehicle: 2017 Cadillac XT5 SUV
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20170110
Test Date: 10/12/2016

CAMERA POSITIONS FOR FRONTAL IMPACTS

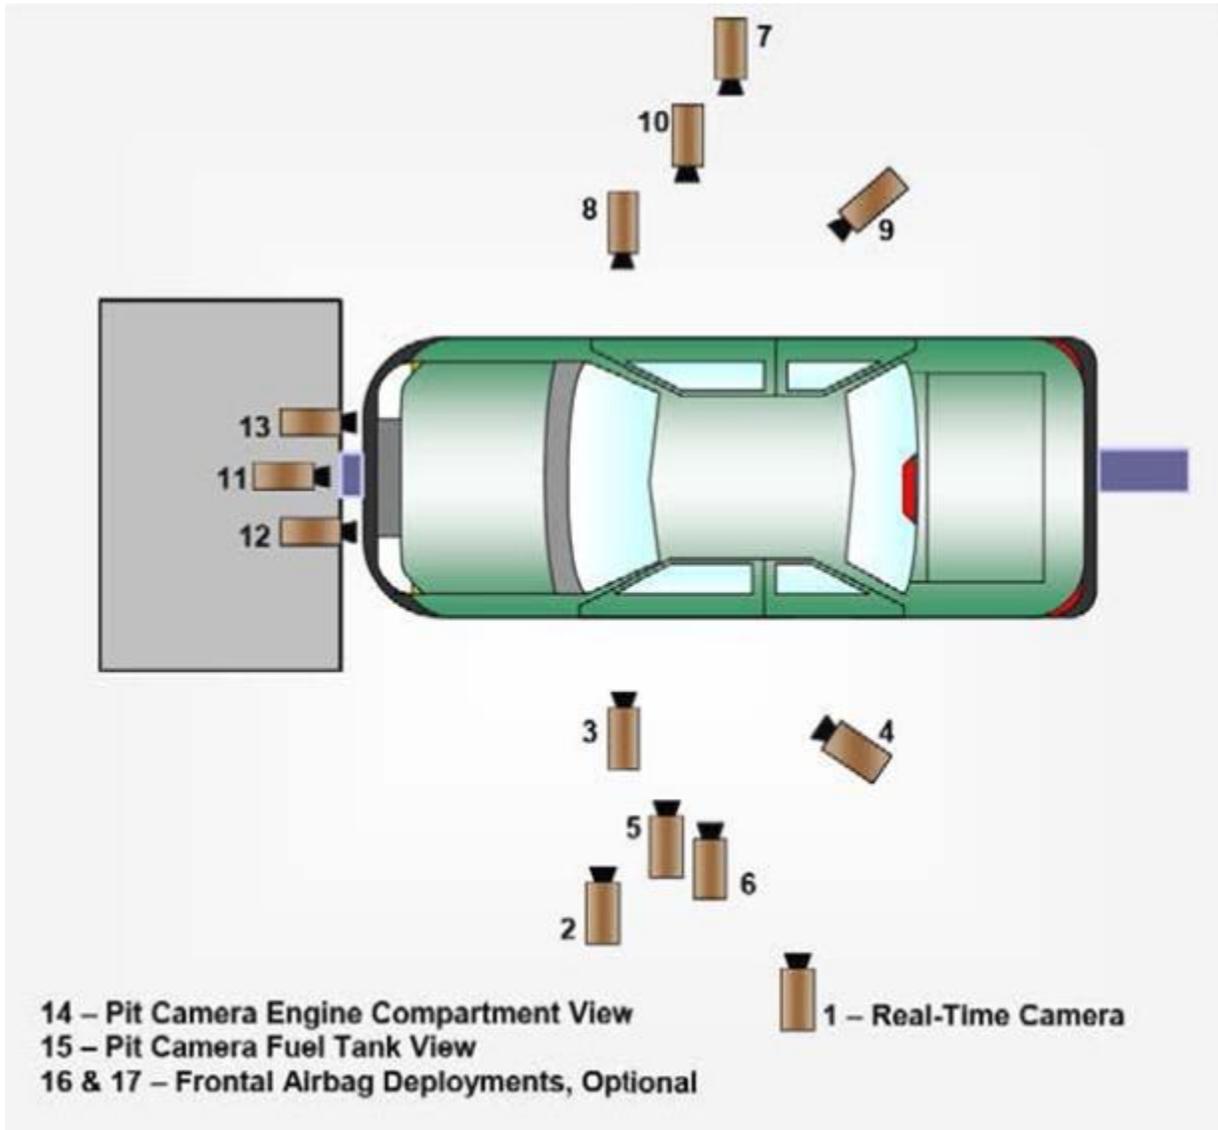

Top View

DATA SHEET NO. 6 ... (CONTINUED)
HIGH-SPEED CAMERA LOCATIONS AND DATA

Test Vehicle: 2017 Cadillac XT5 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20170110
 Test Date: 10/12/2016

CAMERA LOCATIONS


No.	Camera View	Location (mm)			Lens (mm)	Speed (fps)
		X	Y	Z		
1	Real-Time Left Overall	-	-	-		60
2	Driver Close-Up	-1517	-8439	-1470	50	1000
3	Left Front Half	-1103	-9847	-1625	50	1000
4	Left Angle	-2810	-3063	-2274	24	1000
5	Steering Column - Top					
6	Steering Column - Bottom					
7	Right Overall	-2770	9253	-1196	24	1000
8	Passenger Close-Up	-2197	7678	-1502	50	1000
9	Right Front Half	-1789	6633	-1217	28	1000
10	Right Angle	-2890	2873	-2160	24	1000
11	Windshield	950	0	-3500	20	1000
12	Driver Windshield	395	600	-2051	12.5	1000
13	Passenger Windshield	395	-600	-2051	12.5	1000
14	Pit Front	-933	0	1575	12.5	1000
15	Pit Rear	-2394	0	1765	12.5	1000
16	Onboard Driver Airbag (Optional)				8	1000
17	Onboard Passenger Airbag (Optional)				8	1000

* COORDINATES: +X = forward of impact plane
 +Y = right of monorail center
 +Z = into ground

**DATA SHEET NO. 7
VEHICLE ACCELEROMETER LOCATIONS**

Test Vehicle: 2017 Cadillac XT5 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20170110
 Test Date: 10/12/2016

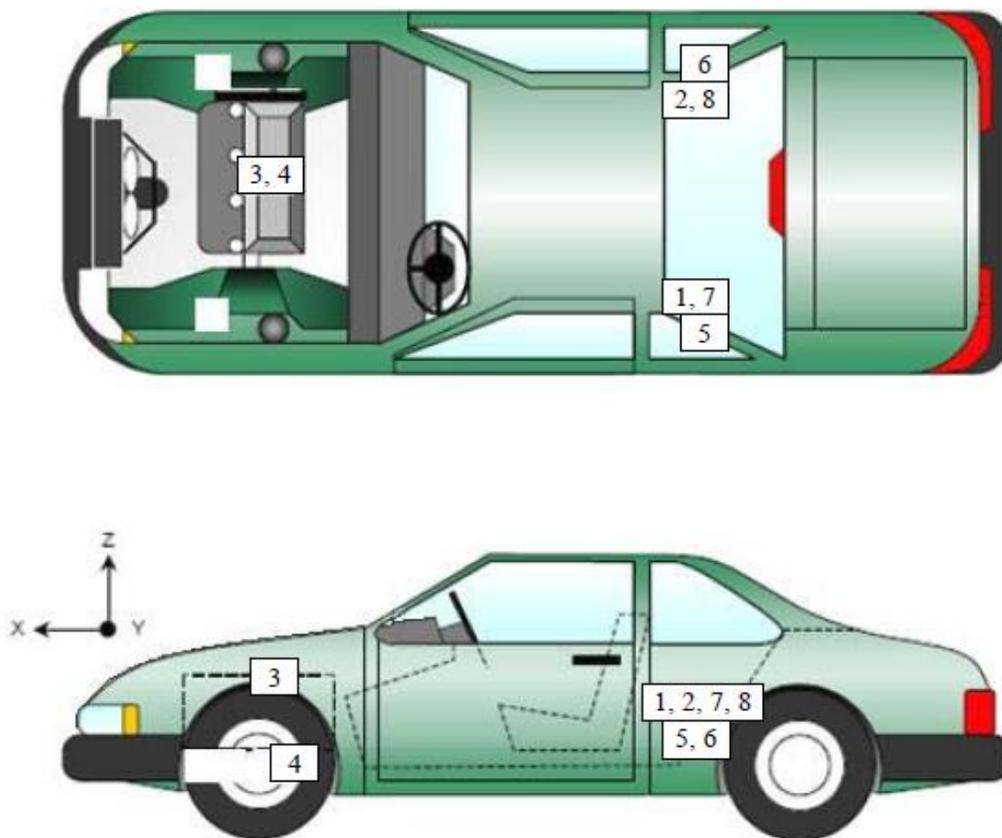

VEHICLE ACCELEROMETER PRE-TEST LOCATIONS

No.	Accelerometer Location	Measurements (mm)		
		X	Y	Z
1	Left Rear Accelerometer – X Direction	1869	-341	163
2	Right Rear Accelerometer – X Direction	1868	404	159
3	Engine Top X	4074	-115	-185
4	Engine Bottom X	4285	156	391
5	Left Rear Accelerometer – Z Direction	1869	-341	163
6	Right Rear Accelerometer – Z Direction	1868	404	159
7	Left Rear Accelerometer – X Direction Redundant	1868	-335	162
8	Right Rear Accelerometer – X Direction Redundant	1867	401	160

Reference Points: *X – Rear Surface of Vehicle (+ forward)*
 Y – Vehicle Centerline (+ to right)
 Z – Ground Plane (+ down)




DATA SHEET NO. 8
PHOTOGRAPHIC REFERENCE TARGET LOCATIONS

Test Vehicle: 2017 Cadillac XT5 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20170110
 Test Date: 10/12/2016

Item	Value
A	470
B	935
C	2395
D	252
E	2173
F	138
G	1825
H	867
I	1508
J	919
K	928
L	1465
M	857
N	1462
O	932
P	927
Q	1499

All units in millimeters

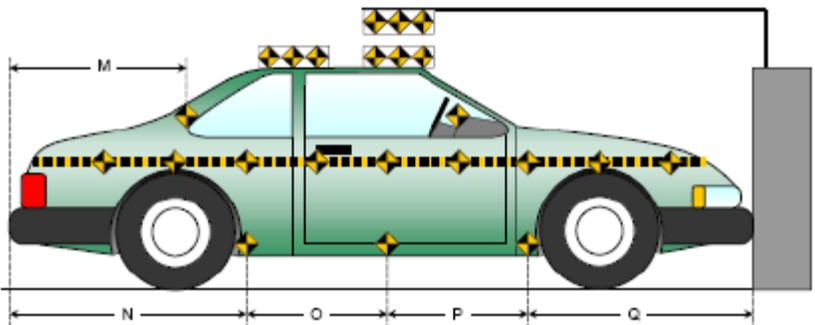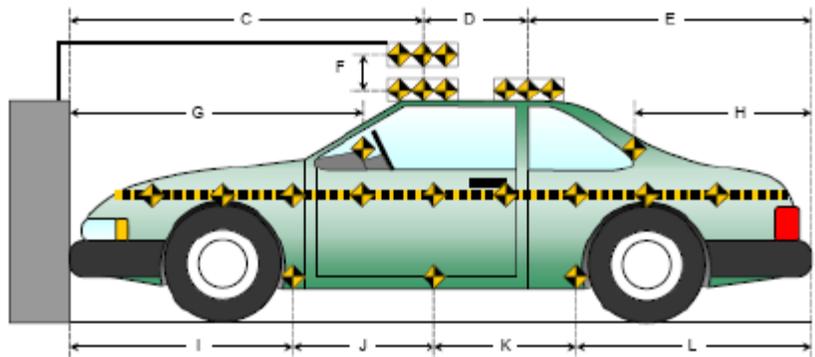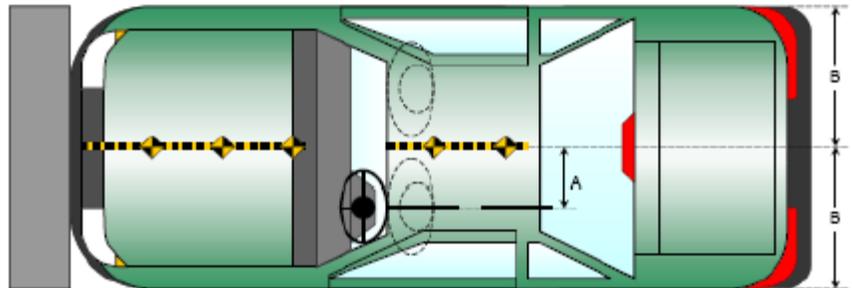

DATA SHEET NO. 9
LOAD CELL LOCATIONS ON FIXED BARRIER

Test Vehicle: 2017 Cadillac XT5 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20170110
 Test Date: 10/12/2016

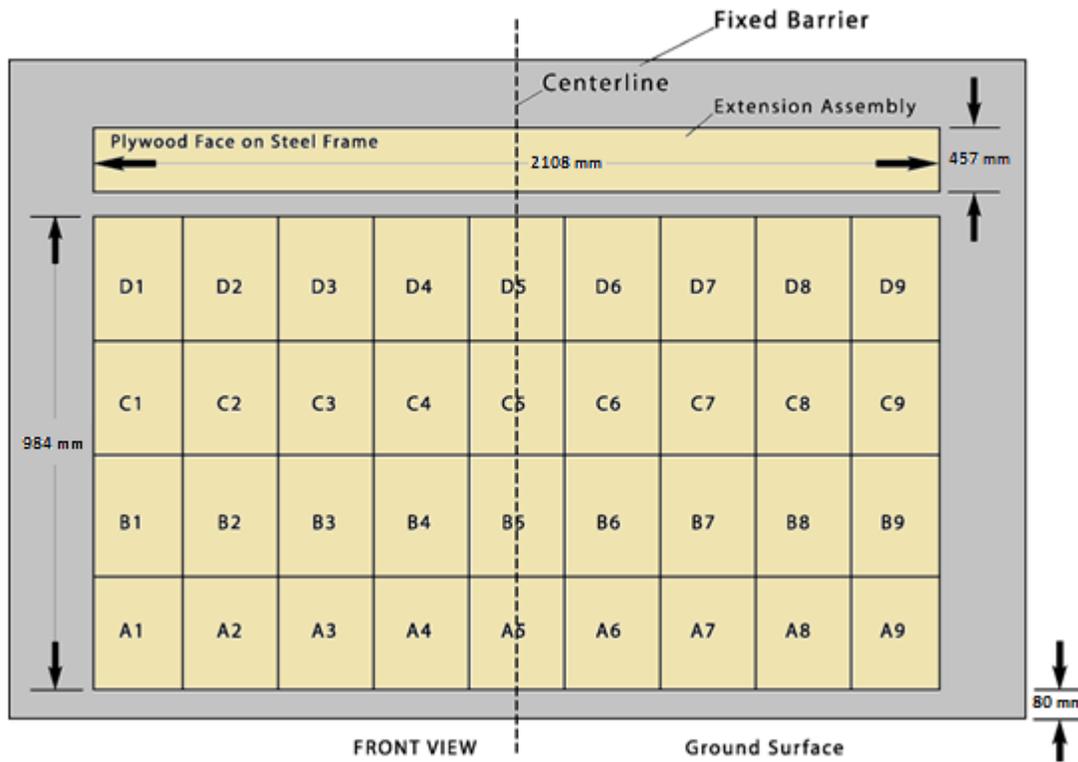


Figure 1 - Load Cell Locations on a 36-Load Cell Barrier with Plywood Height Extension*

DATA SHEET NO. 10
TEST VEHICLE SUMMARY OF RESULTS

Test Vehicle: 2017 Cadillac XT5 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20170110
 Test Date: 10/12/2016

INSTRUMENTATION

Instrumentation	Number of Channels Collected
Driver Dummy Accelerometers	46
Passenger Dummy Accelerometers	46
Vehicle Structure Accelerometers	8
Load Cell Barrier	36
Total	136

CAMERA COVERAGE

Type of Camera	Number Used in this Test
High-Speed Vehicle Onboard	2
High-Speed Offboard	12
Real-Time Panning	1
Total	15

**DATA SHEET NO. 11
POST-TEST OBSERVATIONS**

Test Vehicle: 2017 Cadillac XT5 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20170110
 Test Date: 10/12/2016

TEST DUMMY INFORMATION AND CONTACT LOCATIONS

Description	Driver	Passenger
Dummy Type / Serial No.	P572E 50 th Male / 1046	P5720 5 th Female / 288
Head Contact	Front Airbag & Headrest	Front Airbag & Headrest
Upper Torso Contact	Front Airbag	Front Airbag
Lower Torso Contact	None	None
Left Knee Contact	Knee Airbag	Glove Box
Right Knee Contact	Knee Airbag	Glove Box

DOOR OPENING AND SEAT TRACK INFORMATION

Description	Driver	Passenger
Locked / Unlocked Doors	Unlocked	Unlocked
Front Door Opening	Closed & Operational	Closed & Operational
Rear Door Opening	Closed & Operational	Closed & Operational
Seat Track Shift (mm)	0	0
Seat Back Failure	No	No
Glazing Damage	None	None

POST-TEST STRUCTURAL OBSERVATIONS

Critical Areas of Performance	Observations and Conclusions
Windshield Damage	Remained in good condition
Window Damage	None
Other Notable Effects	None

VEHICLE REBOUND FROM BARRIER

Measured Parameter	Units	Value
Left Side	mm	680
Center	mm	540
Right Side	mm	670
Average	mm	630


SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION

Restraint Type	Driver		Passenger	
	Installed	Deployed	Installed	Deployed
Front Airbag	Yes	Yes	Yes	Yes
Side Airbag 1 - Curtain	Yes	Yes	Yes	No
Side Airbag 2 - Torso/Pelvis Airbag	Yes	No	Yes	No
Knee Airbag	Yes	Yes	No	N/A
Seat Belt Pretensioner	Yes	Yes	Yes	Yes
Seat Belt Load Limiter	Yes	Yes	Yes	Yes
Other				

DATA SHEET NO. 12
VEHICLE PROFILE MEASUREMENTS

Test Vehicle: 2017 Cadillac XT5 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20170110
 Test Date: 10/12/2016

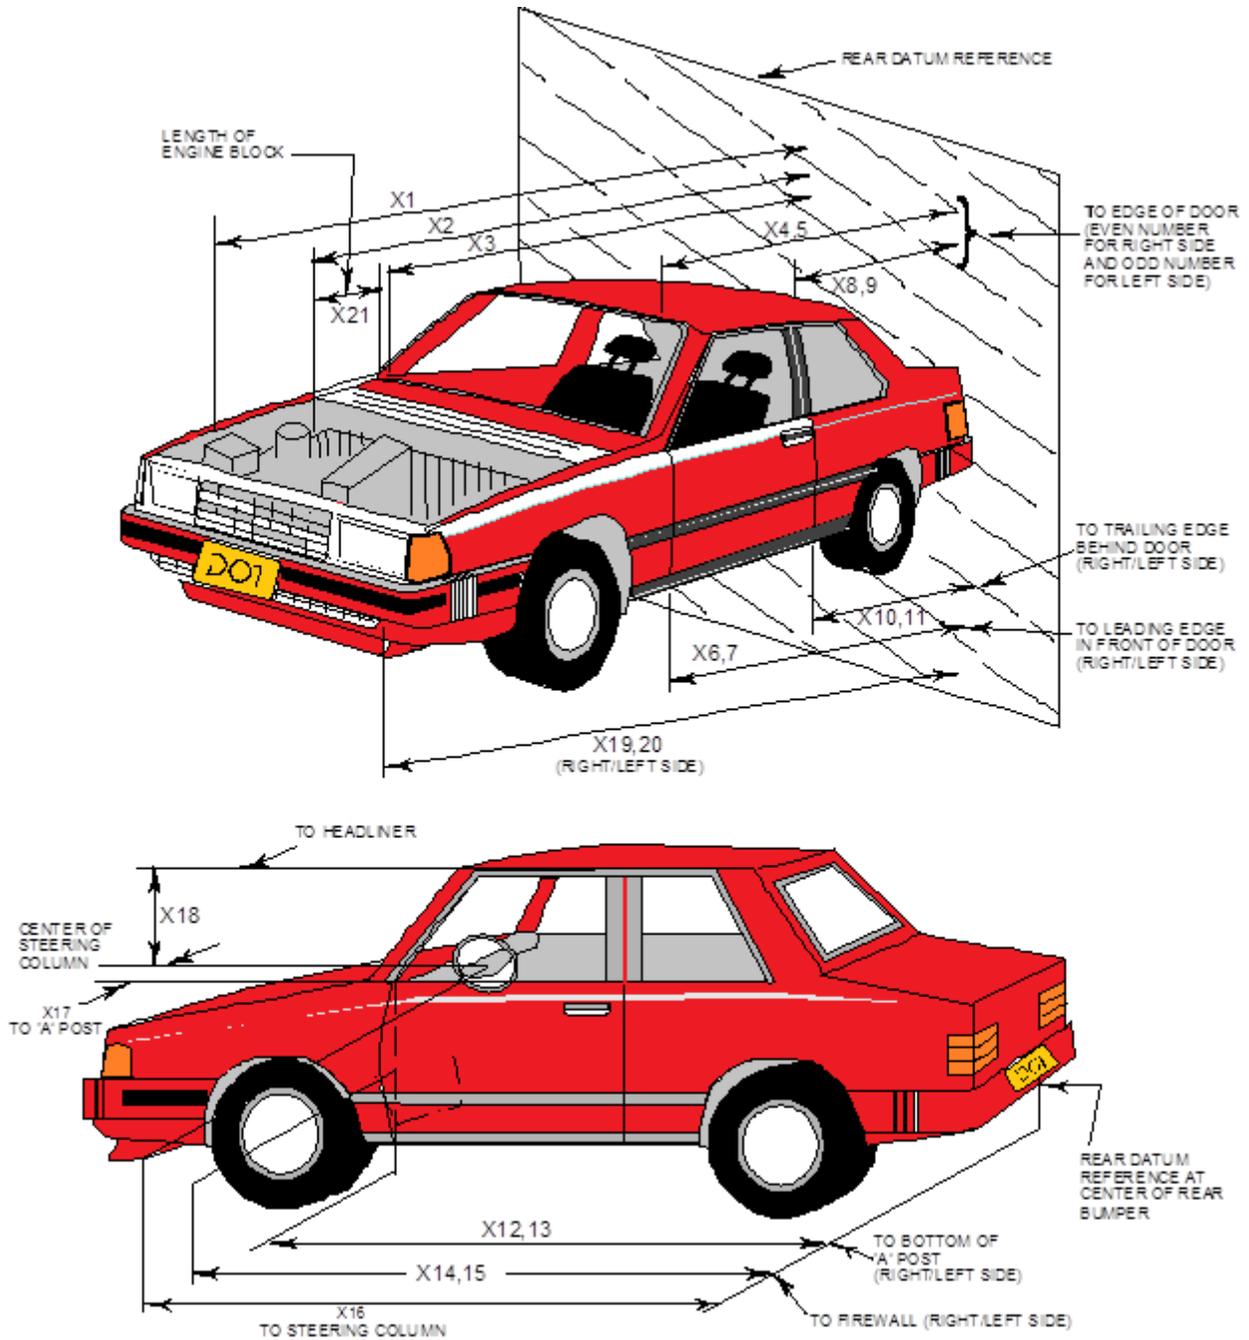

**DATA SHEET NO. 12 ... (CONTINUED)
VEHICLE PROFILE MEASUREMENTS**

Test Vehicle: 2017 Cadillac XT5 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20170110
 Test Date: 10/12/2016

No.	Measurement Description	Pre-Test	Post-Test	Difference
1	Total Length of Vehicle at Centerline	4820	4490	-330
2	Rear Surface of Vehicle (RSOV) to Front of Engine	4273	4005	-267
3	RSOV to Firewall	3686	3684	-2
4	RSOV to Upper Leading Edge of Right Door	3297	3295	-2
5	RSOV to Upper Leading Edge of Left Door	3296	3296	-1
6	RSOV to Lower Leading Edge of Right Door	3250	3246	-4
7	RSOV to Lower Leading Edge of Left Door	3250	3250	0
8	RSOV to Upper Trailing Edge of Right Door	2192	2192	0
9	RSOV to Upper Trailing Edge of Left Door	2193	2192	0
10	RSOV to Lower Trailing Edge of Right Door	2196	2195	-1
11	RSOV to Lower Trailing Edge of Left Door	2194	2196	2
12	RSOV to Bottom of "A" Post of Right Side	3347	3345	-2
13	RSOV to Bottom of "A" Post of Left Side	3348	3348	0
14	RSOV to Firewall, Right Side	3857	3855	-2
15	RSOV to Firewall, Left Side	3859	3856	-3
16	RSOV to Steering Column	2840	2918	78
17	Center of Steering Column to "A" Post	289	291	2
18	Center of Steering Column to Headliner	419	452	33
19	RSOV to Right Side of Front Bumper	4730	4419	-312
20	RSOV to Left Side of Front Bumper	4731	4408	-323
21	Length of Engine Block	468	468	0
RD	RSOV to Right Side of Dash Panel	2964	2964	0
CD	RSOV to Center of Dash Panel	2961	2958	-3
LD	RSOV to Left Side of Dash Panel	2969	2970	1

*UR= Unrecoverable data point
 All Dimensions in mm

DATA SHEET NO. 13
ACCIDENT INVESTIGATION DIVISION DATA

Test Vehicle: 2017 Cadillac XT5 SUV
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20170110
Test Date: 10/12/2016


VEHICLE INFORMATION

VIN: 1GYKNDRS2HZ148173
Vehicle Size Category: MPV

Wheelbase (mm): 2858
Test Weight (kg): 2206

ACCELEROMETER DATA

Accelerometer Locations: Please See Data Sheet No. 7
Cal. Procedure / Interval: Calspan Procedure / 6 month
Integration Algorithm: Trapezoidal
Linearity: > 99%
Impact Velocity (km/h): 56.56
Velocity Change (km/h): 56.56
Time of Separation (ms): 150

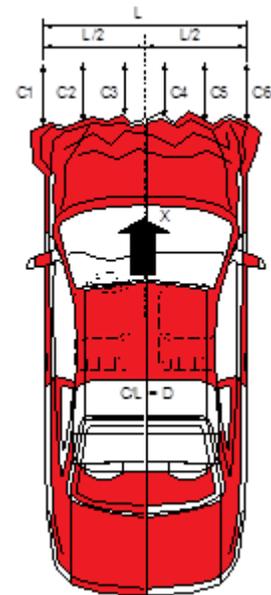

CRUSH PROFILE

Collision Deformation Classification: 12FDEW2
Midpoint of Damage: Vehicle Centerline
Damage Region Length (mm): 1349
Impact Mode: Frontal

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
C1	Crush Zone 1 at Left Side	mm	4593	4304	289
C2	Crush Zone 2 at Left Side	mm	4752	4428	324
C3	Crush Zone 3 at Left Side	mm	4805	4471	334
C4	Crush Zone 4 at Right Side	mm	4803	4472	331
C5	Crush Zone 5 at Right Side	mm	4751	4431	320
C6	Crush Zone 6 at Right Side	mm	4588	4367	221
L	C1 to C6	mm	1349	1310	39

DATA SHEET NO. 14
VEHICLE INTRUSION MEASUREMENTS

Test Vehicle: 2017 Cadillac XT5 SUV
Test Program: NCAP Frontal Barrier Impact Test


NHTSA No.: M20170110
Test Date: 10/12/2016

DOOR OPENING WIDTH

Item	Description	Units	Pre-Test	Post-Test	Difference
A	Left Side Upper	mm	982	981	-1
B	Left Side Lower	mm	850	851	1
D	Right Side Upper	mm	980	980	0
E	Right Side Lower	mm	846	845	-1

WHEELBASE MEASUREMENTS

Item	Description	Units	Pre-Test	Post-Test	Difference
C	Left Side Wheelbase	mm	2858	2774	-84
F	Right Side Wheelbase	mm	2858	2775	-83

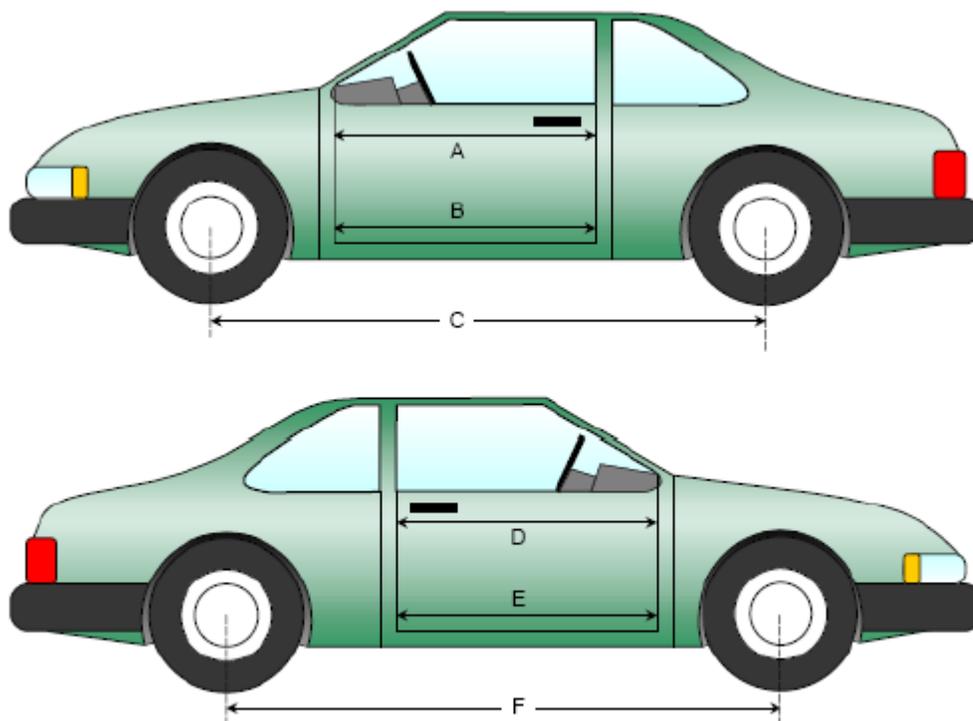

Left & Right Side Views

**DATA SHEET NO.14 ... (CONTINUED)
VEHICLE INTRUSION MEASUREMENTS**


Test Vehicle: 2017 Cadillac XT5 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20170110
 Test Date: 10/12/2016

DRIVER COMPARTMENT INTRUSION

Item	Description	Units	Pre-Test	Post-Test	Difference
AB	Door Opening (Inside Window Jam)	mm	874	872	-2
CX	Left Knee Bolster to X	mm	347	343	-4
DX	Right Knee Bolster to X	mm	344	341	-3
EX	Brake Pedal to X	mm	571	533	-38
FX	Foot Rest to X	mm	616	602	-14
GX	Center of Steering Column Wheel Hub to X	mm	95	169	74

X = Front of Seat Track (Stationary)

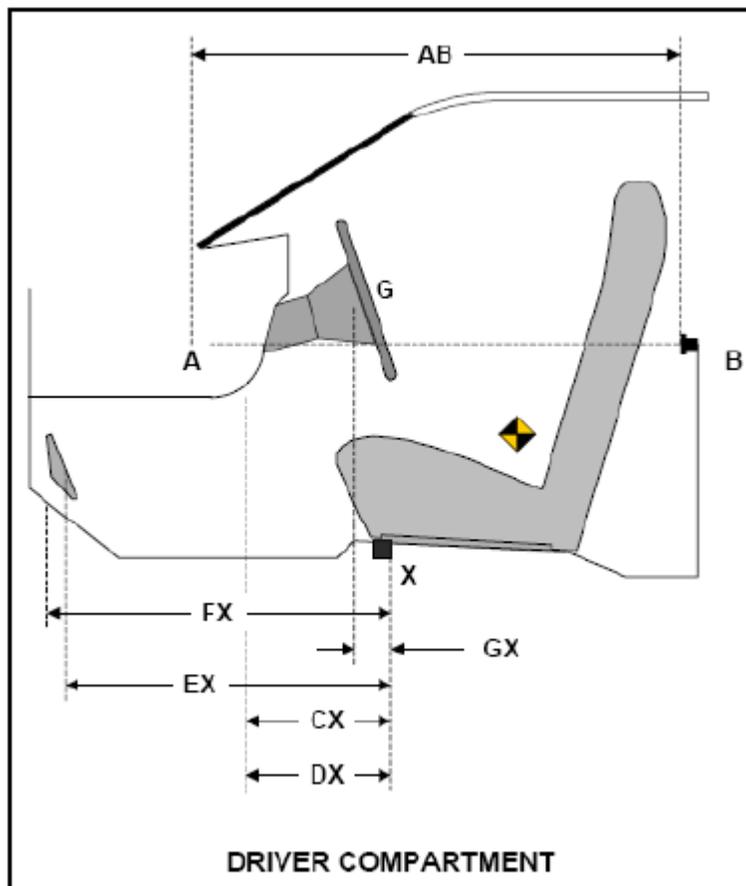

DATA SHEET NO. 15
SUMMARY OF FMVSS 212, 219 (PARTIAL), AND 301 DATA

Test Vehicle: 2017 Cadillac XT5 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20170110
 Test Date: 10/12/2016


Windshield Mounting Details: A 0.8 mm trim surrounds the top and side of windshield while a plastic shroud is on the bottom.

The standard requires that the post-test retention measurement be a minimum of 75% of the pre-test total periphery measurement for vehicles not equipped with occupant passive restraints and 50% for each side of the windshield for vehicles which are equipped with occupant passive restraints.

Temperature of windshield molding during test: 21° C

WINDSHIELD PERIPHERY MEASUREMENTS

Measurement	Pre-Test (mm)	Post-Test (mm)	% Retention
Left Side	2226	2226	100
Right Side	2226	2226	100
Total	4451	4451	100

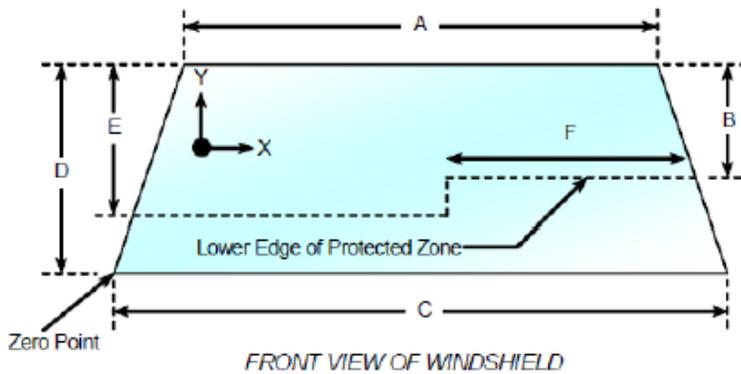

Item	Units	Value
A	mm	1259
B	mm	469
C	mm	1552
D	mm	820
E	mm	515
F	mm	532

AREAS OF PROTECTED ZONE FAILURES

- A. Provide coordinates of the area that the protected zone was penetrated more than .25 inches by a vehicle component other than one that is normally in contact with the windshield.
- No Penetration

X	Y

- B. Provide coordinates of the area beneath the protected zone that the inner surface of the windshield was penetrated by a vehicle component.
- No Penetration

X	Y

DATA SHEET NO. 15 ... (CONTINUED)
SUMMARY OF FMVSS 212, 219 (PARTIAL), AND 301 DATA

Test Vehicle: 2017 Cadillac XT5 SUV
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20170110
Test Date: 10/12/2016

FMVSS 301 FUEL SYSTEM INTEGRITY POST IMPACT DATA

Temperature at Time of Impact: 21 ° C

Test Time: 11:31 AM


STODDARD SOLVENT SPILLAGE MEASUREMENTS

- A. From impact until vehicle motion ceases: 0 oz.
(Maximum allowable is 1 oz.)
- B. For the 5-minute period after motion ceases: 0 oz.
(Maximum allowable is 5 oz.)
- C. For the following 25 minutes: 0 oz.
(Maximum allowable is 1 oz./minute)
- D. Spillage: No Spillage Occurred

DATA SHEET NO. 16
FMVSS 301 STATIC ROLLOVER RESULTS

Test Vehicle: 2017 Cadillac XT5 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20170110
 Test Date: 10/12/2016

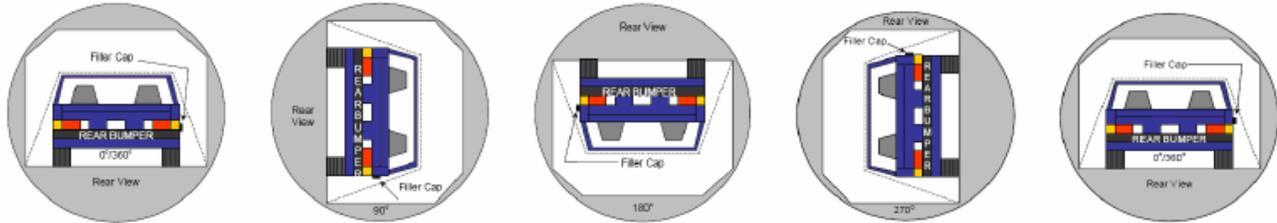

0° TO 90° 90° TO 180° 180° TO 270° 270° TO 360°

1. The specified fixture rollover rate for each 90° of rotation is 60 to 180 seconds.
2. The position hold time at each position is 300 seconds (minimum).
3. Details of Stoddard Solvent Spillage: No Spillage Occurred

SOLVENT COLLECTION TIME TABLE IN SECONDS

Test Phase	Rotation Time	Hold Time	Total Time
0° to 90°	65	300	365
90° to 180°	66	300	366
180° to 270°	61	300	361
270° to 360°	70	300	370

FMVSS 301 SPILLAGE TABLE

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0° to 90°	0	0	0	
90° to 180°	0	0	0	
180° to 270°	0	0	0	
270° to 360°	0	0	0	


SOLVENT SPILLAGE LOCATION TABLE

Test Phase	Spillage Location
0° to 90°	None
90° to 180°	None
180° to 270°	None
270° to 360°	None

DATA SHEET NO. 17
DUMMY / VEHICLE TEMPERATURE STABILIZATION CHART

Test Vehicle: 2017 Cadillac XT5 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20170110
 Test Date: 10/12/2016

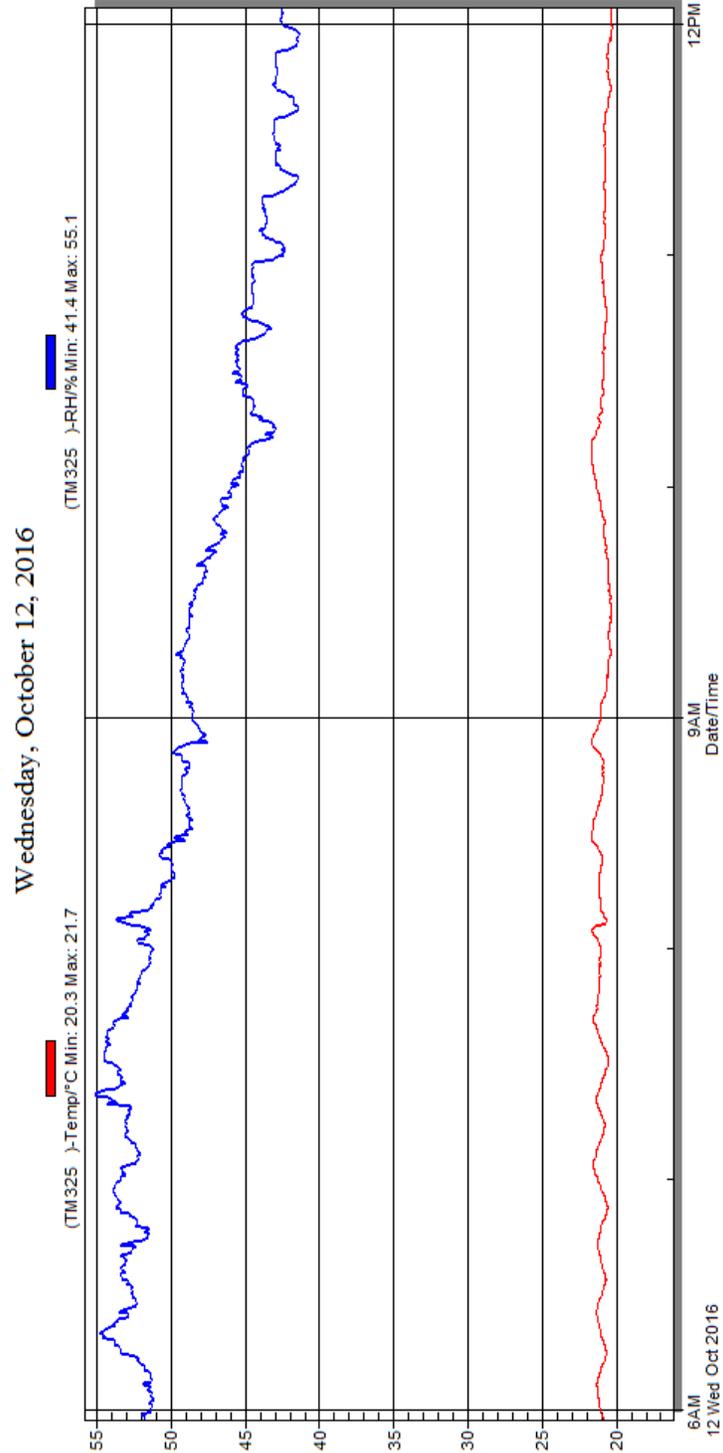

Temperature and Humidity Stabilization Chart/Data for Dummies and Test Vehicle

APPENDIX A
PHOTOGRAPHS

TABLE OF PHOTOGRAPHS

Fig.	Description	Page
1	Load Cell Location	A-5
2	Pre-Test Load Cell Wall	A-5
3	Post-Test Load Cell Wall	A-6
4	Manufacturer's Label	A-6
5	Tire Placard	A-7
6	2017 Cadillac XT5 Frontal As Delivered	A-7
7	Left Rear 3-4 View, as Received	A-8
8	Pre-Test Front View of Test Vehicle	A-8
9	Post-Test Front View of Test Vehicle	A-9
10	Pre-Test Left View of Test Vehicle	A-9
11	Post-Test Left View of Test Vehicle	A-10
12	Pre-Test Right View of Test Vehicle	A-10
13	Post-Test Right View of Test Vehicle	A-11
14	Pre-Test Right Front 3-4 View	A-11
15	Post-Test Right Front 3-4 View	A-12
16	Pre-Test Left Rear 3-4 View	A-12
17	Post-Test Left Rear 3-4 View	A-13
18	Pre-Test Windshield View	A-13
19	Post-Test Windshield View	A-14
20	Pre-Test Engine Compartment View	A-14
21	Post-Test Engine Compartment View	A-15
22	Pre-Test Fuel Filler Cap View	A-15
23	Post-Test Fuel Filler Cap View	A-16
24	Pre-Test Front Underbody View ¹	A-16
25	Post-Test Front Underbody View ¹	A-17
26	Pre-Test Rear Underbody View ¹	A-17
27	Post-Test Rear Underbody View ¹	A-18
28	Pre-Test Dummy Cable Routing	A-18
29	Post-Test Dummy Cable Routing	A-19
30	Pre-Test Driver Dummy Front View	A-19
31	Post-Test Driver Dummy Front View	A-20
32	Pre-Test Driver Dummy Window View	A-20
33	Post-Test Driver Dummy Window View	A-21
34	Pre-Test Driver Dummy and Vehicle Interior View	A-21
35	Post-Test Driver Dummy and Vehicle Interior View	A-22

Fig.	Description	Page
36	Pre-Test Driver's Seat Fore-Aft Markings	A-22
37	Post-Test Driver's Seat Fore-Aft Markings	A-23
38	Pre-Test View of Belt Anchorage for Driver Dummy	A-23
39	Post-Test View of Belt Anchorage for Driver Dummy	A-24
40	Pre-Test Driver Dummy Feet	A-24
41	Post-Test Driver Dummy Feet	A-25
42	Pre-Test Driver's Side Knee Bolster	A-25
43	Post-Test Driver's Side Knee Bolster	A-26
44	Pre-Test Driver's Side Floorpan	A-26
45	Post-Test Driver's Side Floorpan	A-27
46	Post-Test Driver Dummy Face	A-27
47	Post-Test Driver Dummy Contact With Airbag	A-28
48	Post-Test Driver Dummy Contact With Headrest	A-28
49	Pre-Test View of the Steering Wheel	A-29
50	Post-Test View of the Steering Wheel	A-29
51	Pre-Test Passenger Dummy Front View	A-30
52	Post-Test Passenger Dummy Front View	A-30
53	Pre-Test Passenger Dummy Window View	A-31
54	Post-Test Passenger Dummy Window View	A-31
55	Pre-Test Passenger Dummy and Vehicle Interior View	A-32
56	Post-Test Passenger Dummy and Vehicle Interior View	A-32
57	Pre-Test Passenger's Seat Fore-Aft Markings	A-33
58	Post-Test Passenger's Seat Fore-Aft Markings	A-33
59	Pre-Test View of Belt Anchorage for Passenger Dummy	A-34
60	Post-Test View of Belt Anchorage for Passenger Dummy	A-34
61	Pre-Test Passenger Dummy Feet	A-35
62	Post-Test Passenger Dummy Feet	A-35
63	Pre-Test Passenger's Side Knee Bolster	A-36
64	Post-Test Passenger's Side Knee Bolster	A-36
65	Pre-Test Passenger's Side Floorpan	A-37
66	Post-Test Passenger's Side Floorpan	A-37
67	Post-Test Passenger Dummy Face	A-38
68	Post-Test Passenger Dummy Contact With Airbag	A-38
69	Post-Test Passenger Dummy Contact With Headrest	A-39

Fig.	Description	Page
70	Photograph of Ballast Installed in Vehicle	A-39
71	Post-Test Stoddard Solvent Spillage Location View, if Required	A-40
72	Post-Test Speed Trap Read-Out	A-40
73	Vehicle at 0° on Static Rollover Device	A-41
74	Vehicle at 90° on Static Rollover Device	A-41
75	Vehicle at 180° on Static Rollover Device	A-42
76	Vehicle at 270° on Static Rollover Device	A-42
77	Vehicle at 360° on Static Rollover Device	A-43
78	2017 Cadillac XT5 Frontal Impact Event	A-43
79	Monroney Label Photograph	A-44

¹NOTE: *The underbody views should include the following vehicle components: fuel pump, fuel lines, sender unit, fuel tank filler pipe and any other visible system components.*

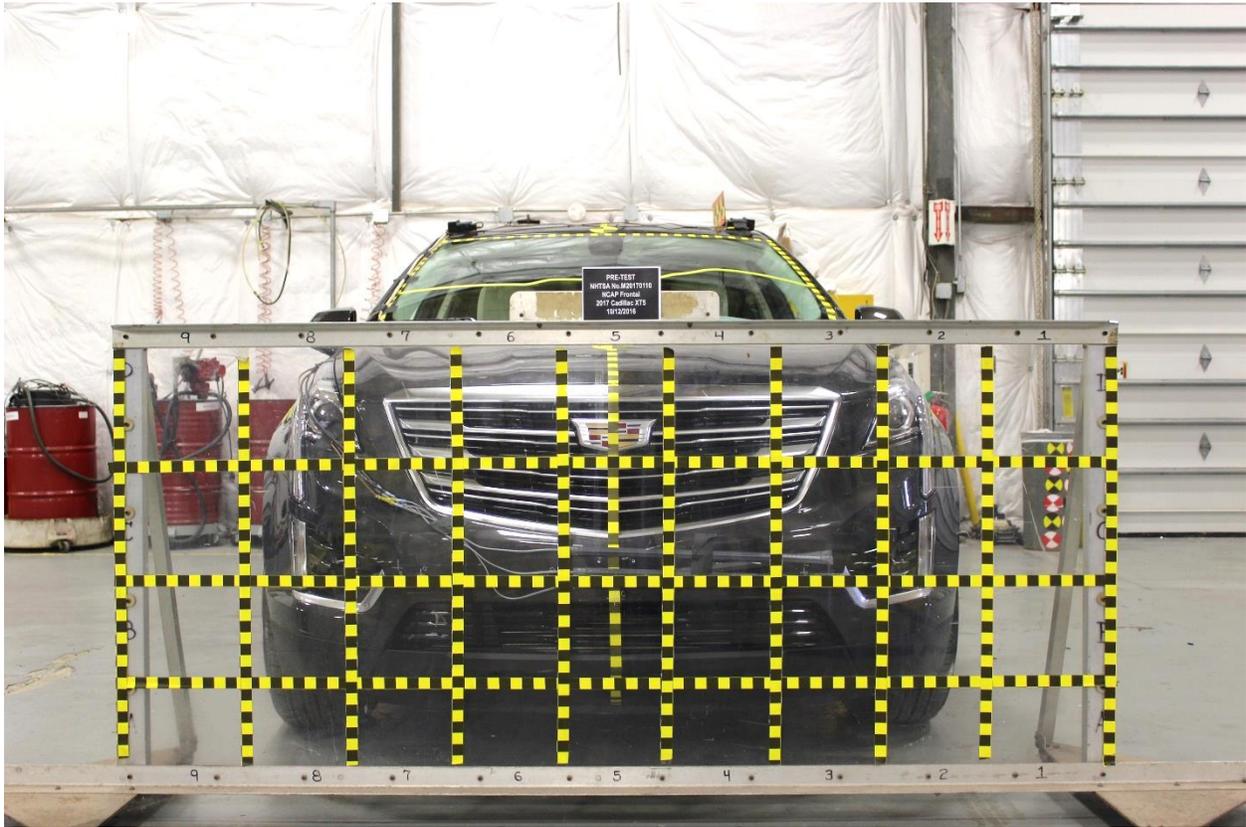


Figure A-1: Load Cell Location

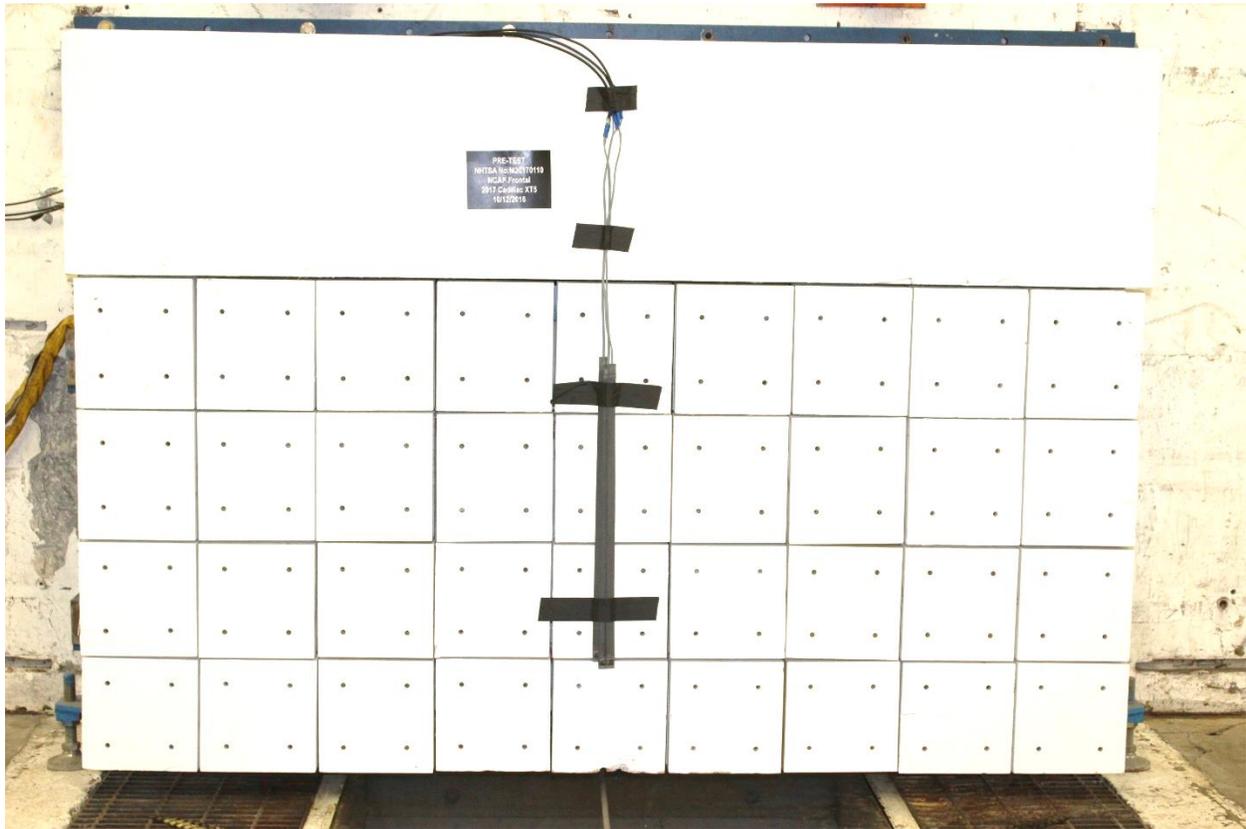


Figure A-2: Pre-Test Load Cell Wall



Figure A-3: Post-Test Load Cell Wall



Figure A-4: Manufacturer's Label

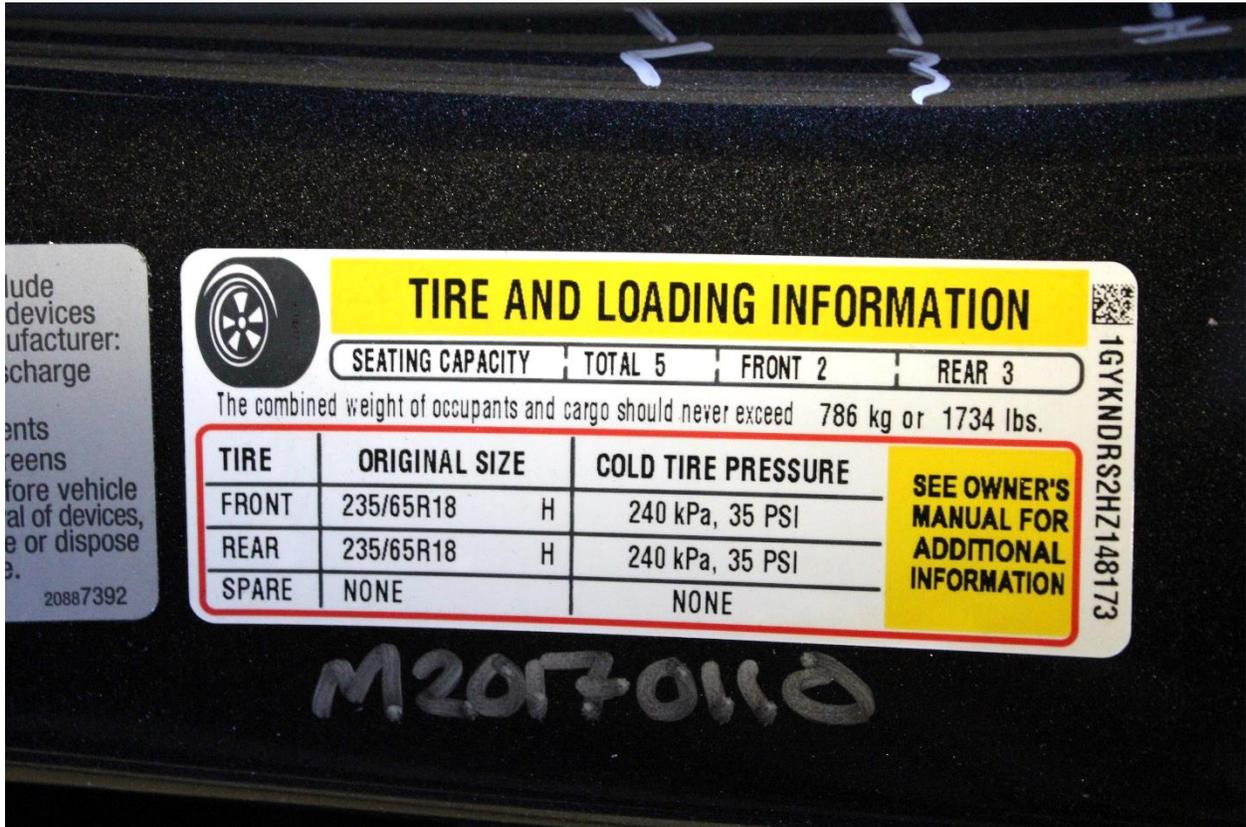


Figure A-5: Tire Placard



Figure A-6: 2017 Cadillac XT5 Frontal As Delivered



Figure A-7: Left Rear 3-4 View, As Received



Figure A-8: Pre-Test Front View of Test Vehicle

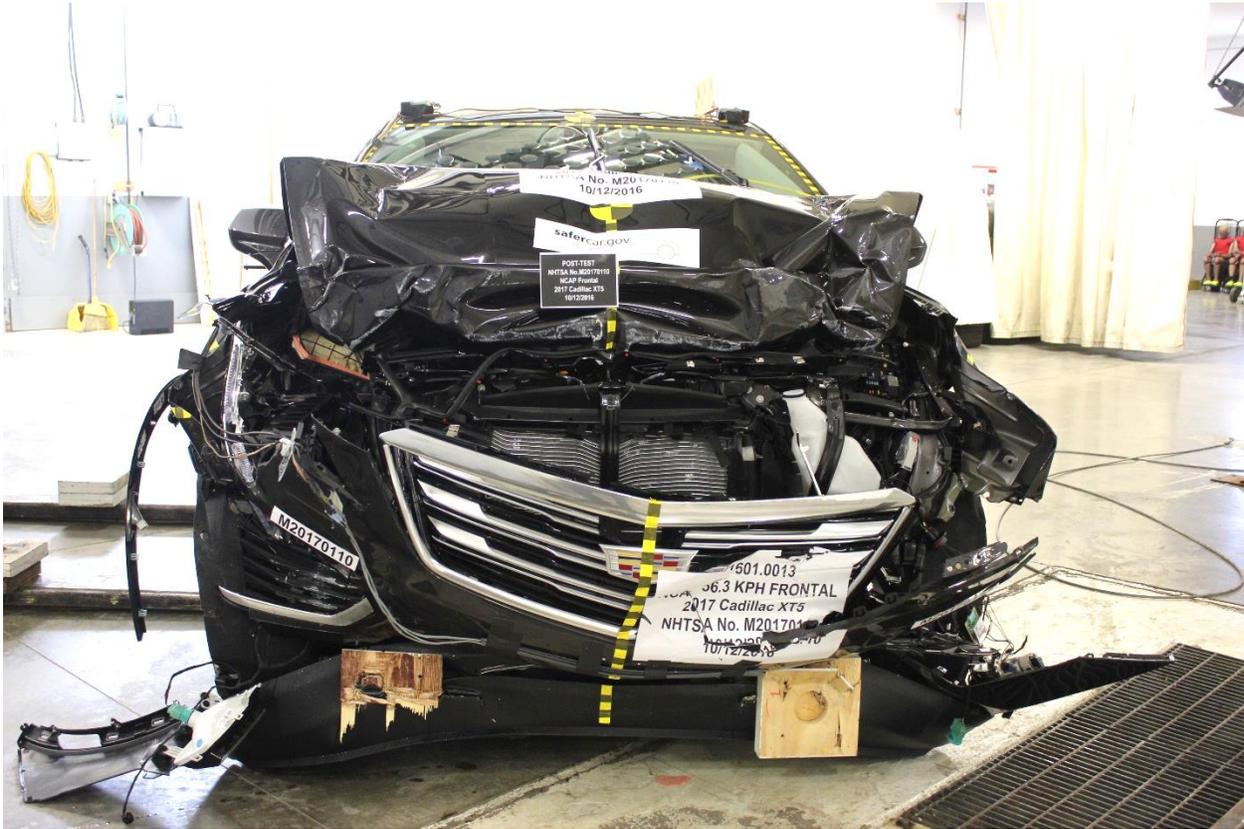


Figure A-9: Post-Test Front View of Test Vehicle



Figure A-10: Pre-Test Left View of Test Vehicle



Figure A-11: Post-Test Left View of Test Vehicle

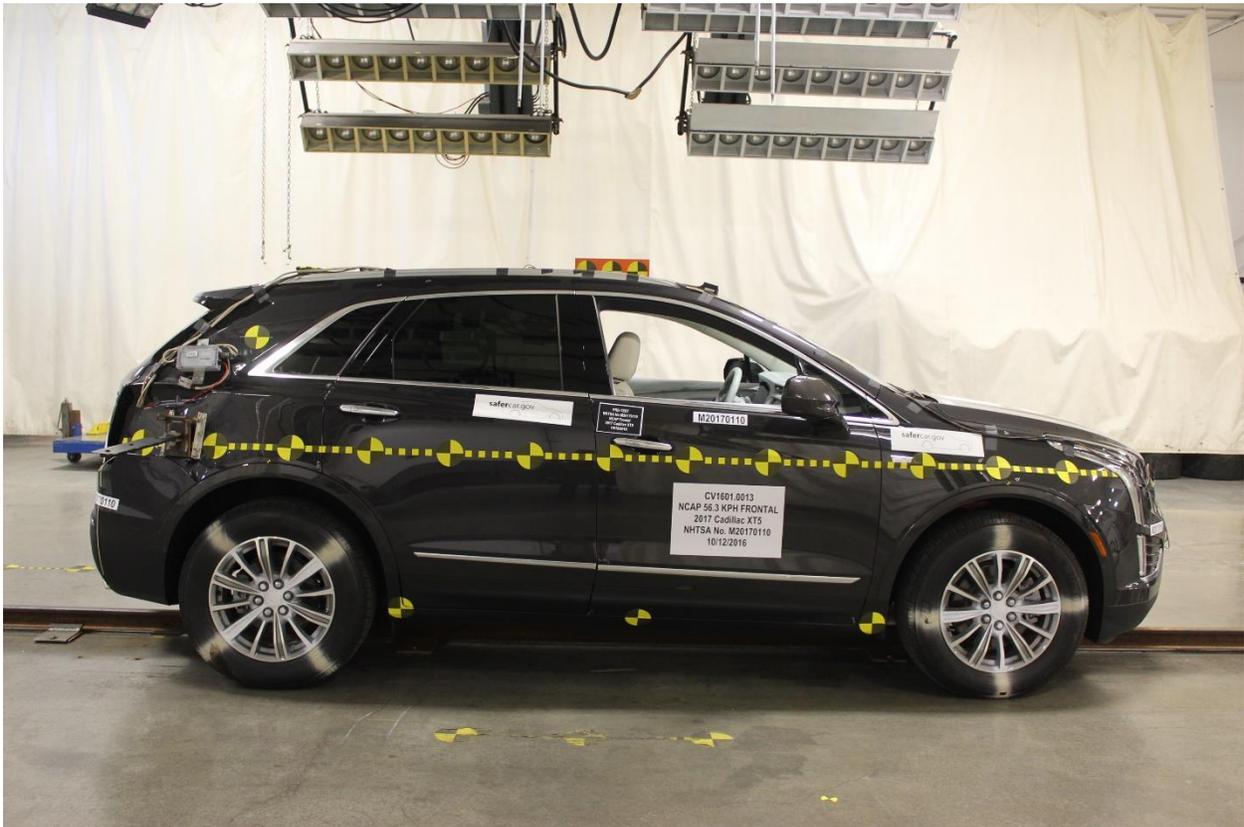


Figure A-12: Pre-Test Right View of Test Vehicle



Figure A-13: Post-Test Right View of Test Vehicle



Figure A-14: Pre-Test Right Front 3-4 View



Figure A-15: Post-Test Right Front 3-4 View



Figure A-16: Pre-Test Left Rear 3-4 View



Figure A-17: Post-Test Left Rear 3-4 View



Figure A-18: Pre-Test Windshield View

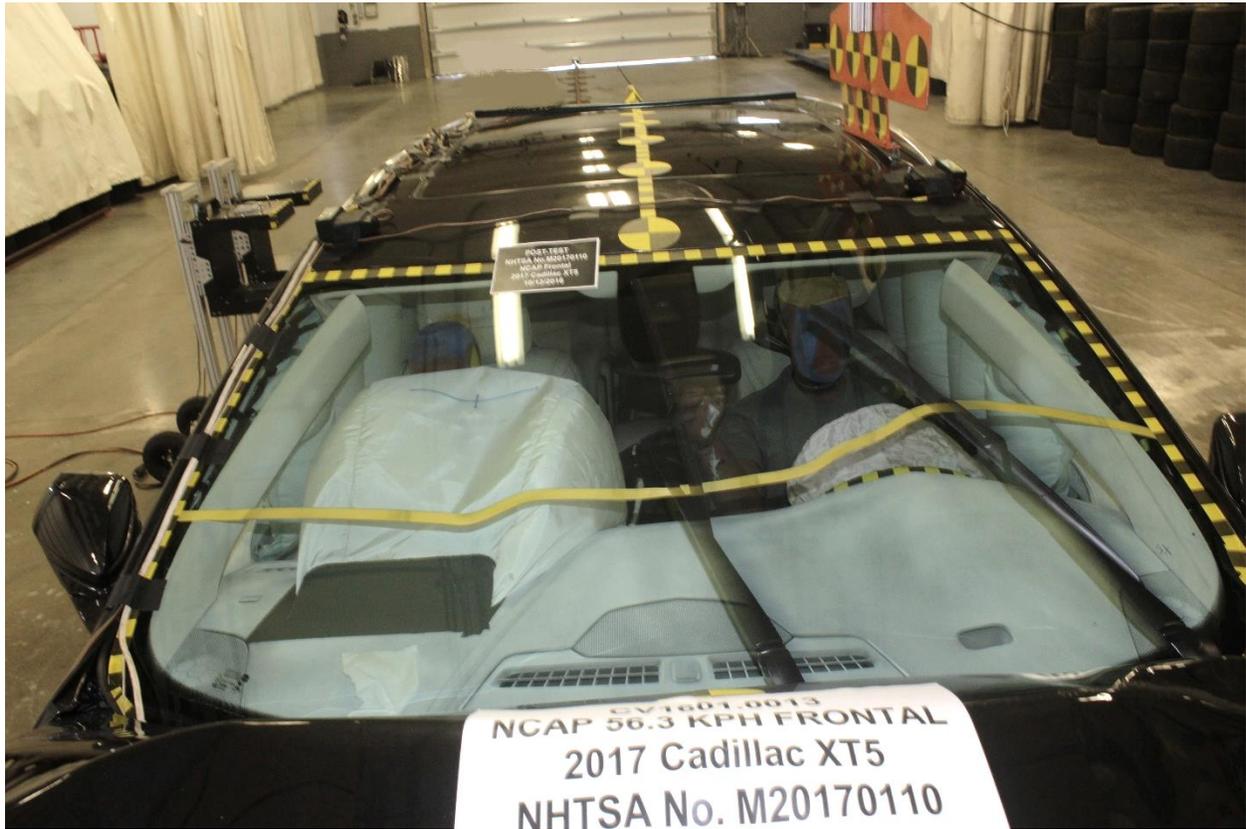


Figure A-19: Post-Test Windshield View

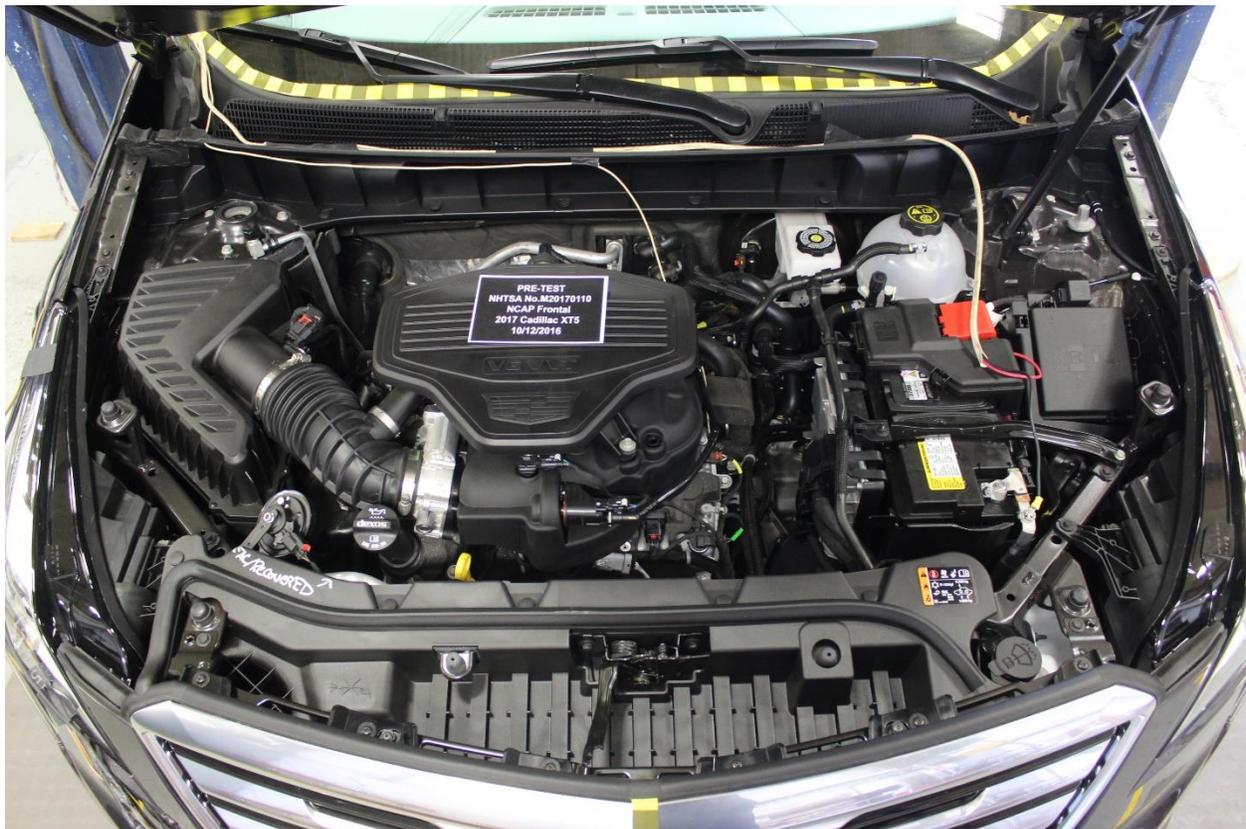


Figure A-20: Pre-Test Engine Compartment View



Figure A-21: Post-Test Engine Compartment View



Figure A-22: Pre-Test Fuel Filler Cap View



Figure A-23: Post-Test Fuel Filler Cap View

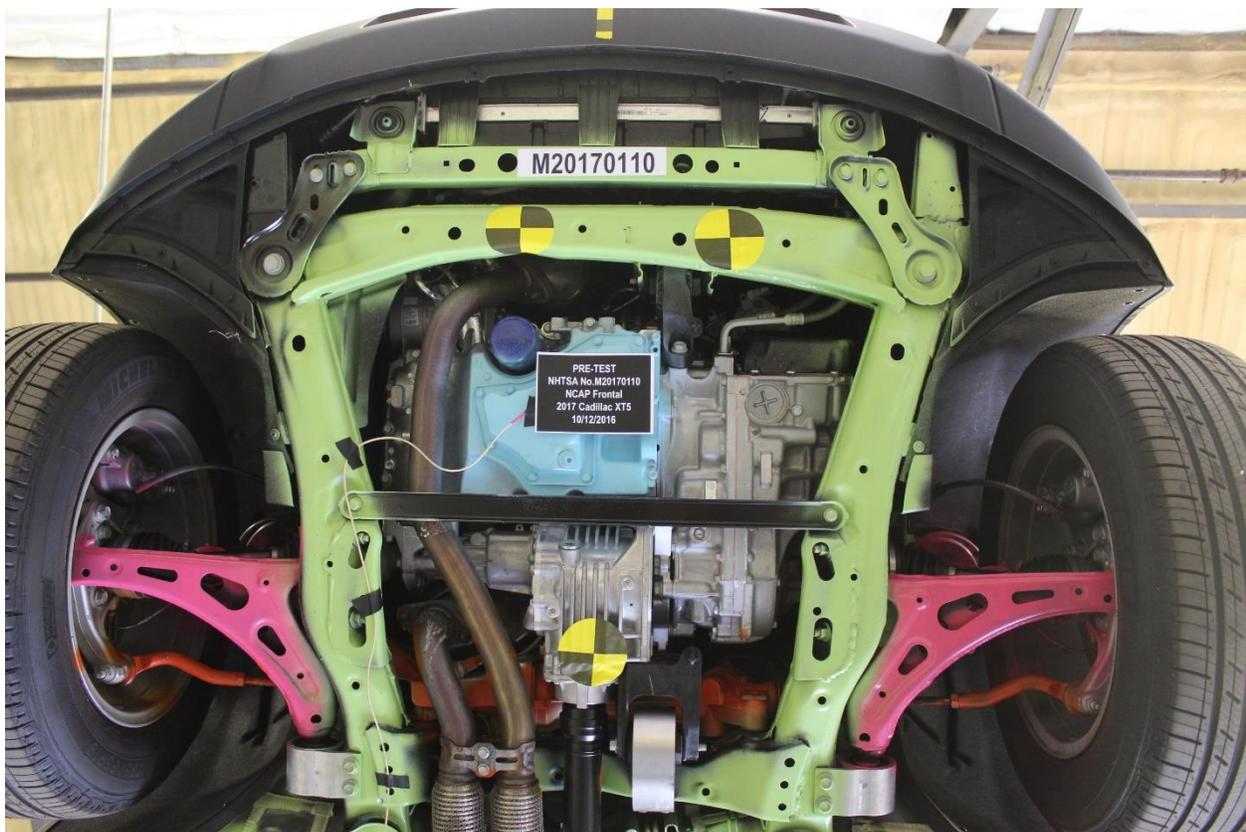


Figure A-24: Pre-Test Front Underbody View

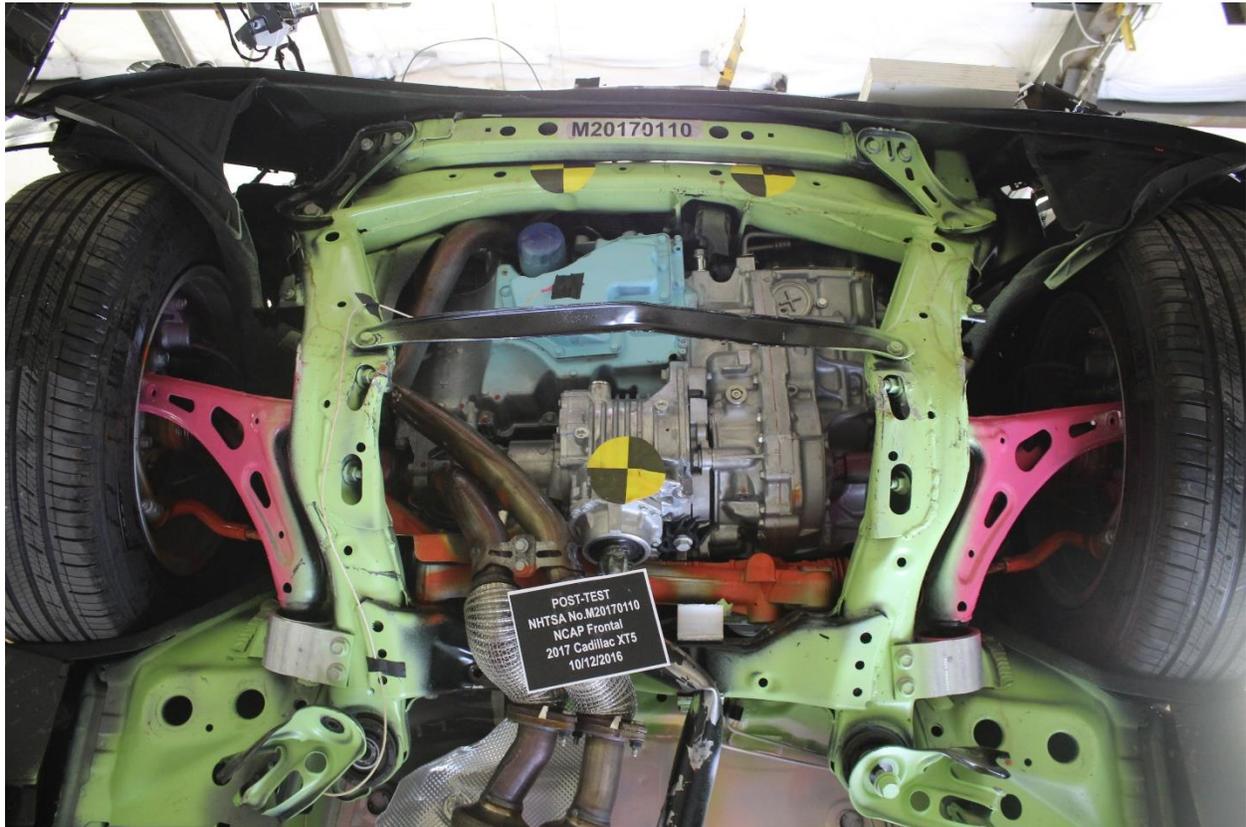


Figure A-25: Post-Test Front Underbody View

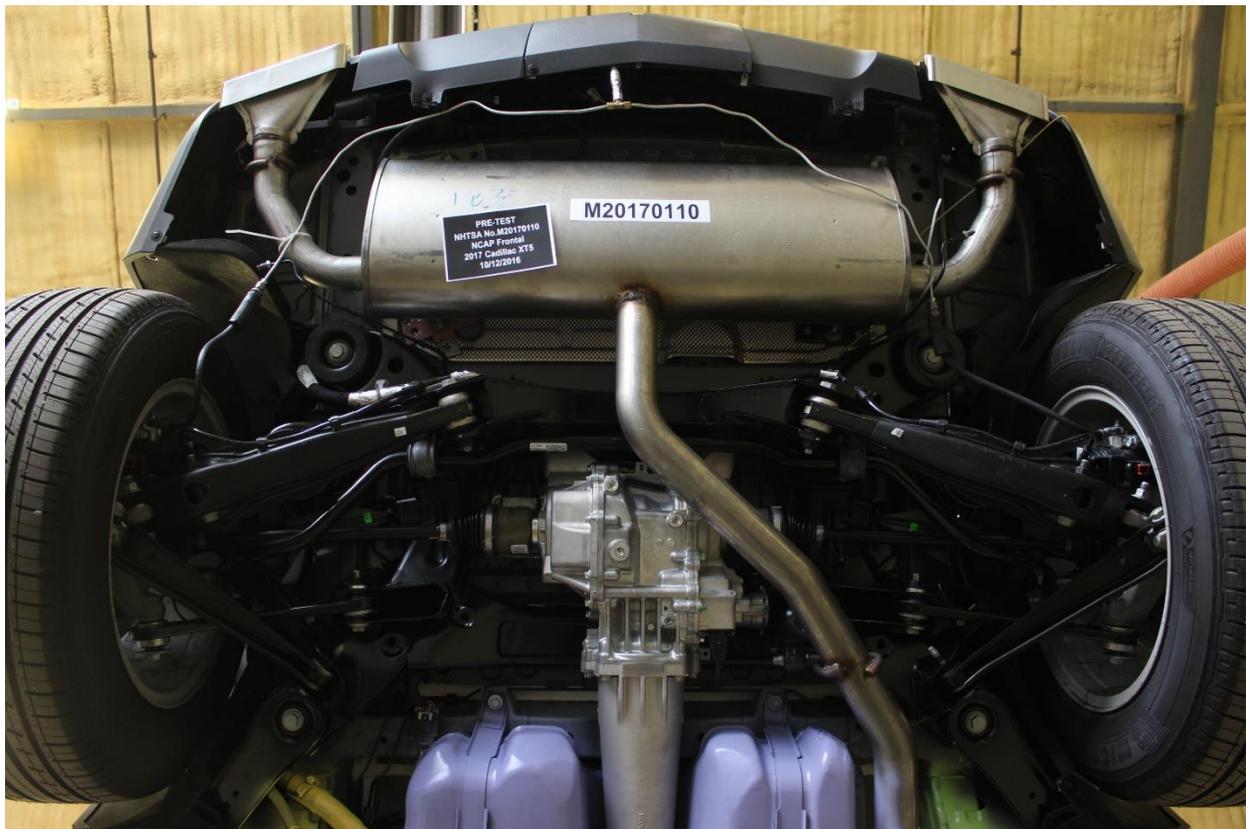


Figure A-26: Pre-Test Rear Underbody View



Figure A-27: Post-Test Rear Underbody View



Figure A-28: Pre-Test Dummy Cable Routing



Figure A-29: Post-Test Dummy Cable Routing



Figure A-30: Pre-Test Driver Dummy Front View



Figure A-31: Post-Test Driver Dummy Front View



Figure A-32: Pre-Test Driver Dummy Window View



Figure A-33: Post-Test Driver Dummy Window View



Figure A-34: Pre-Test Driver Dummy and Vehicle Interior View



Figure A-35: Post-Test Driver Dummy and Vehicle Interior View



Figure A-36: Pre-Test Driver's Seat Fore-Aft Markings



Figure A-37: Post-Test Driver's Seat Fore-Aft Markings

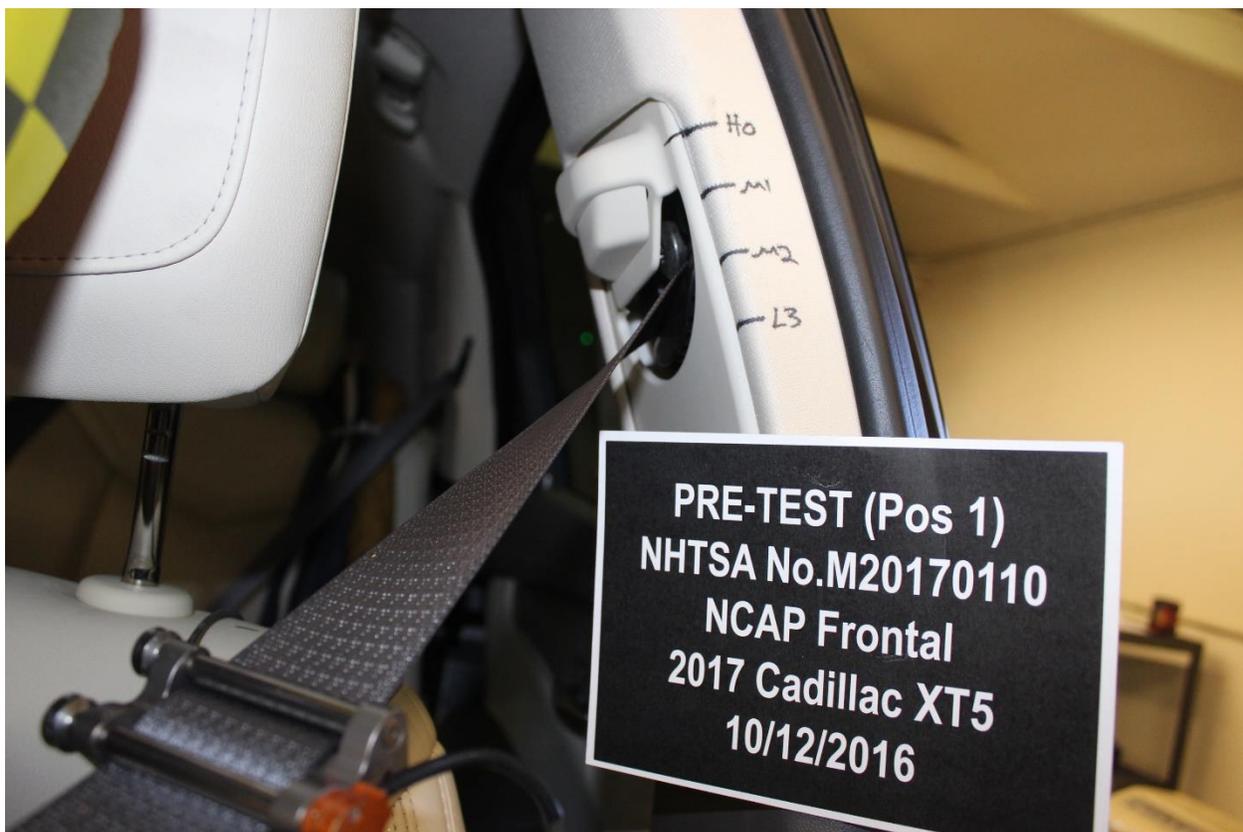


Figure A-38: Pre-Test View of Belt Anchorage for Driver Dummy



Figure A-39: Post-Test View of Belt Anchorage for Driver Dummy

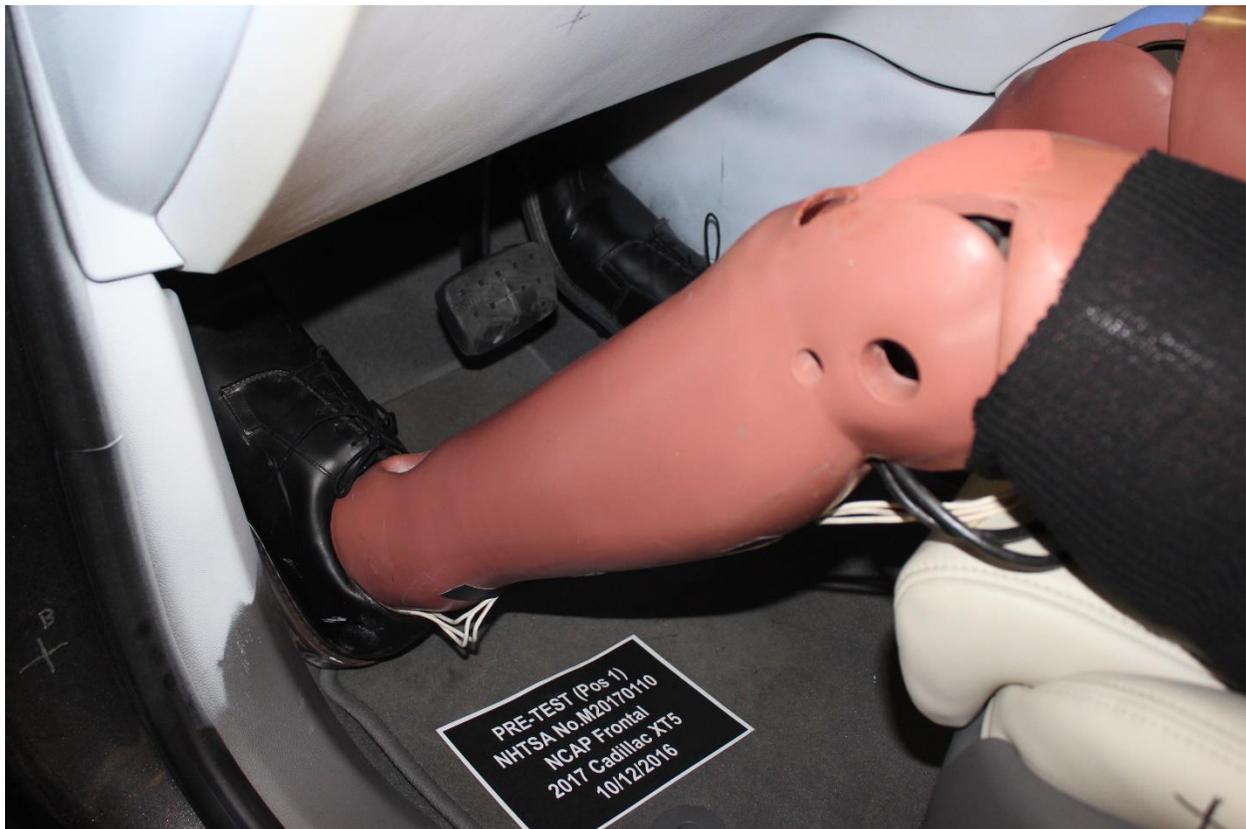


Figure A-40: Pre-Test Driver Dummy Feet



Figure A-41: Post-Test Driver Dummy Feet



Figure A-42: Pre-Test Driver's Side Knee Bolster



Figure A-43: Post-Test Driver's Side Knee Bolster



Figure A-44: Pre-Test Driver's Side Floorpan



Figure A-45: Post-Test Driver's Side Floorpan



Figure A-46: Post-Test Driver Dummy Face



Figure A-47: Post-Test Driver Dummy Contact With Airbag



Figure A-48: Post-Test Driver Dummy Contact With Headrest

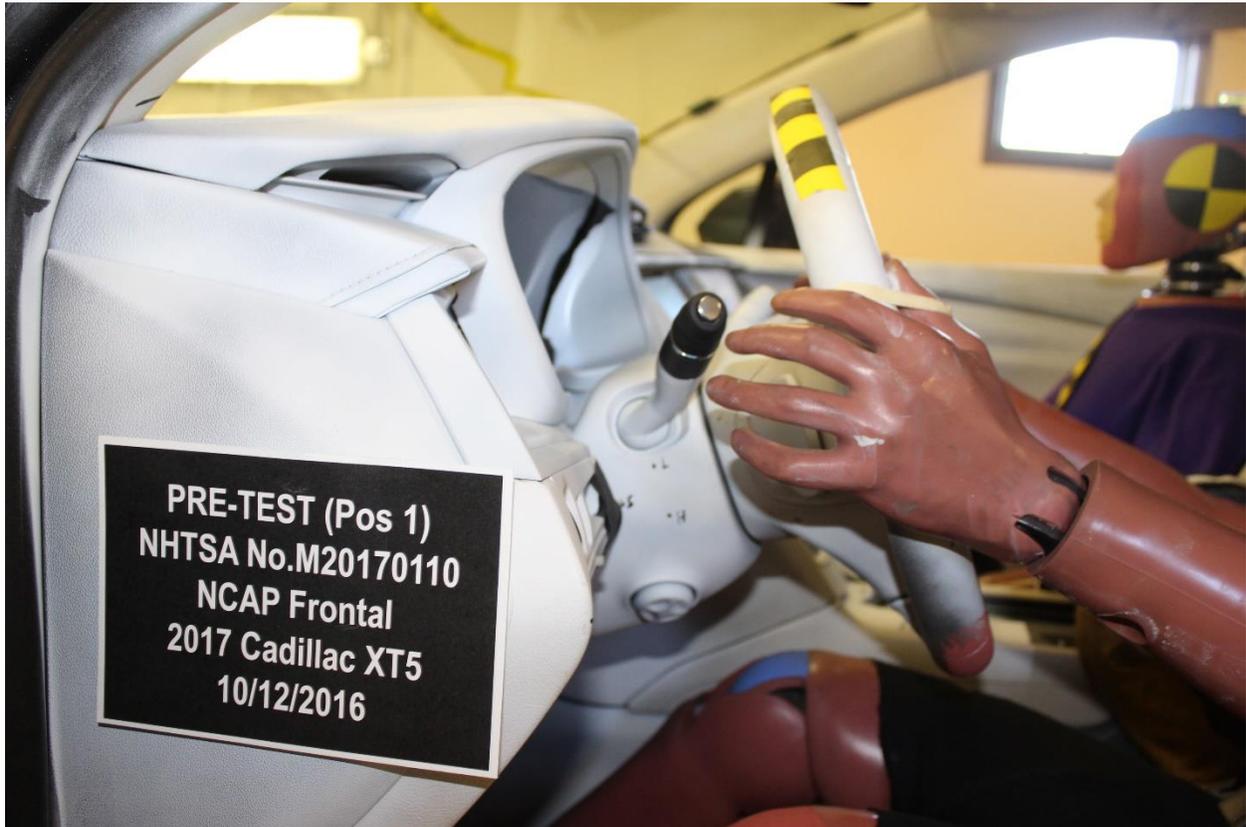


Figure A-49: Pre-Test View of the Steering Wheel

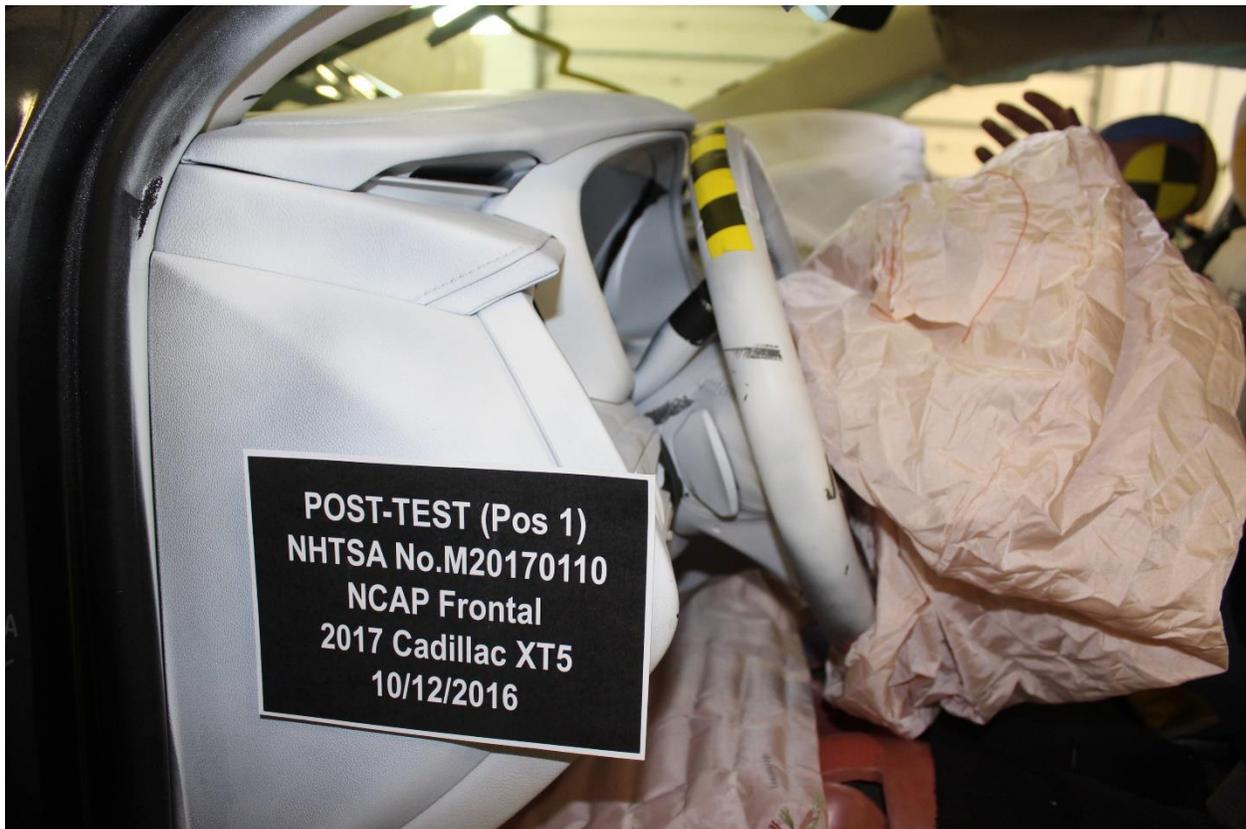


Figure A-50: Post-Test View of the Steering Wheel



Figure A-51: Pre-Test Passenger Dummy Front View

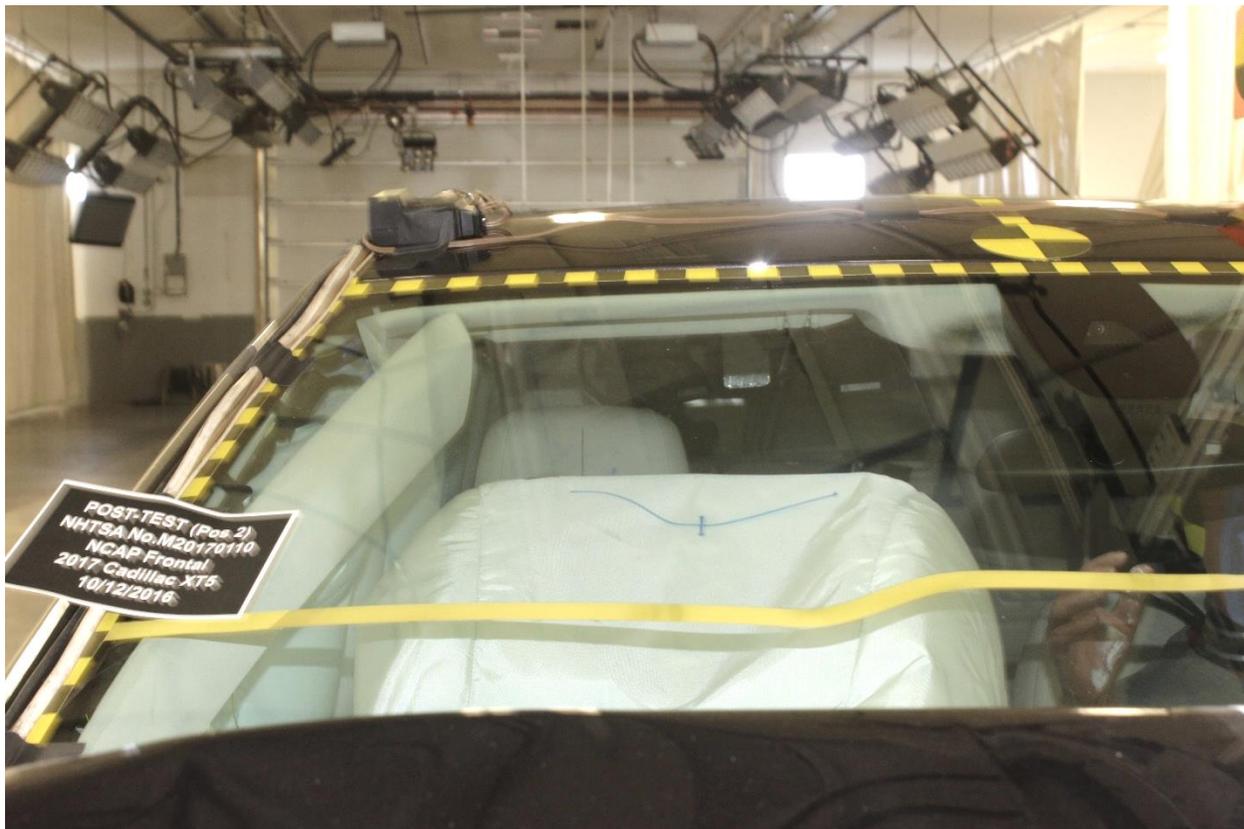


Figure A-52: Post-Test Passenger Dummy Front View



Figure A-53: Pre-Test Passenger Dummy Window View



Figure A-54: Post-Test Passenger Dummy Window View

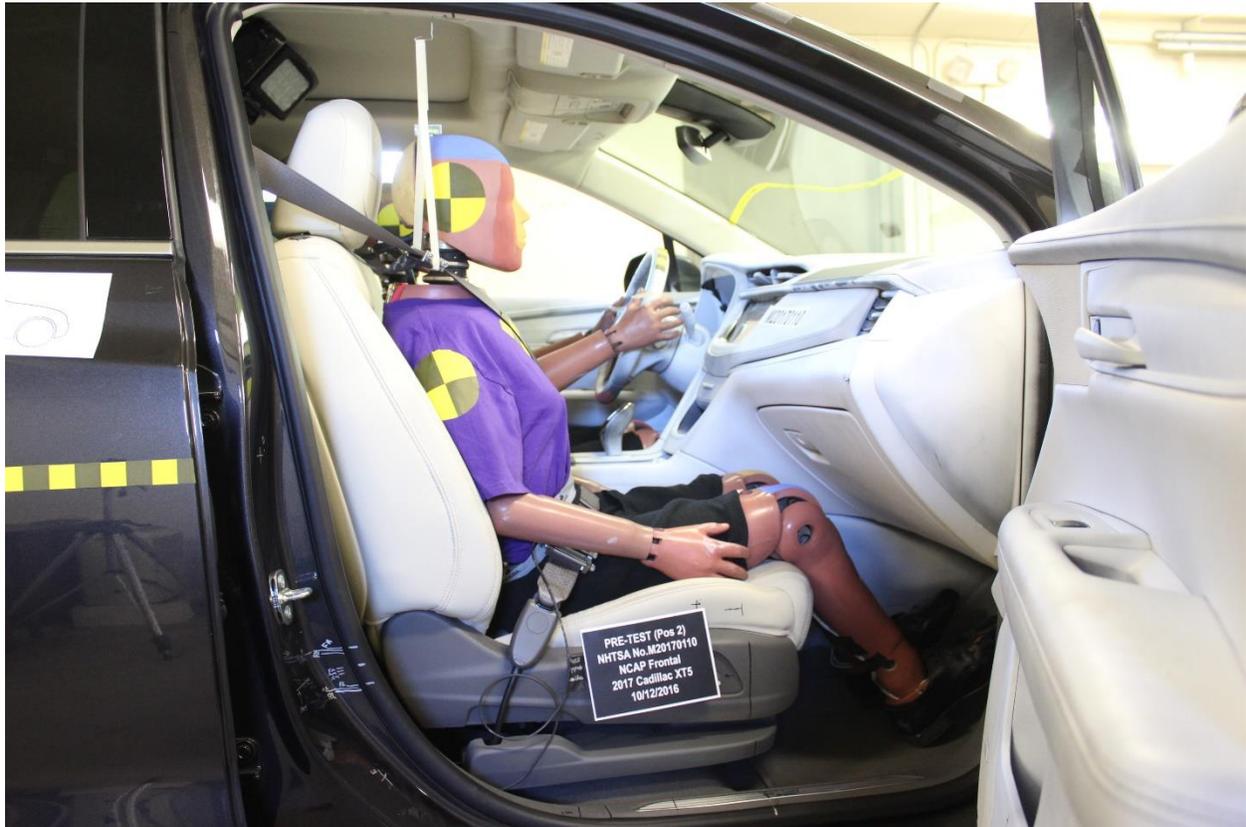


Figure A-55: Pre-Test Passenger Dummy and Vehicle Interior View



Figure A-56: Post-Test Passenger Dummy and Vehicle Interior View



Figure A-57: Pre-Test Passenger's Seat Fore-Aft Markings



Figure A-58: Post-Test Passenger's Seat Fore-Aft Markings



Figure A-59: Pre-Test View of Belt Anchorage for Passenger Dummy



Figure A-60: Post-Test View of Belt Anchorage for Passenger Dummy



Figure A-61: Pre-Test Passenger Dummy Feet



Figure A-62: Post-Test Passenger Dummy Feet



Figure A-63: Pre-Test Passenger's Side Knee Bolster



Figure A-64: Post-Test Passenger's Side Knee Bolster

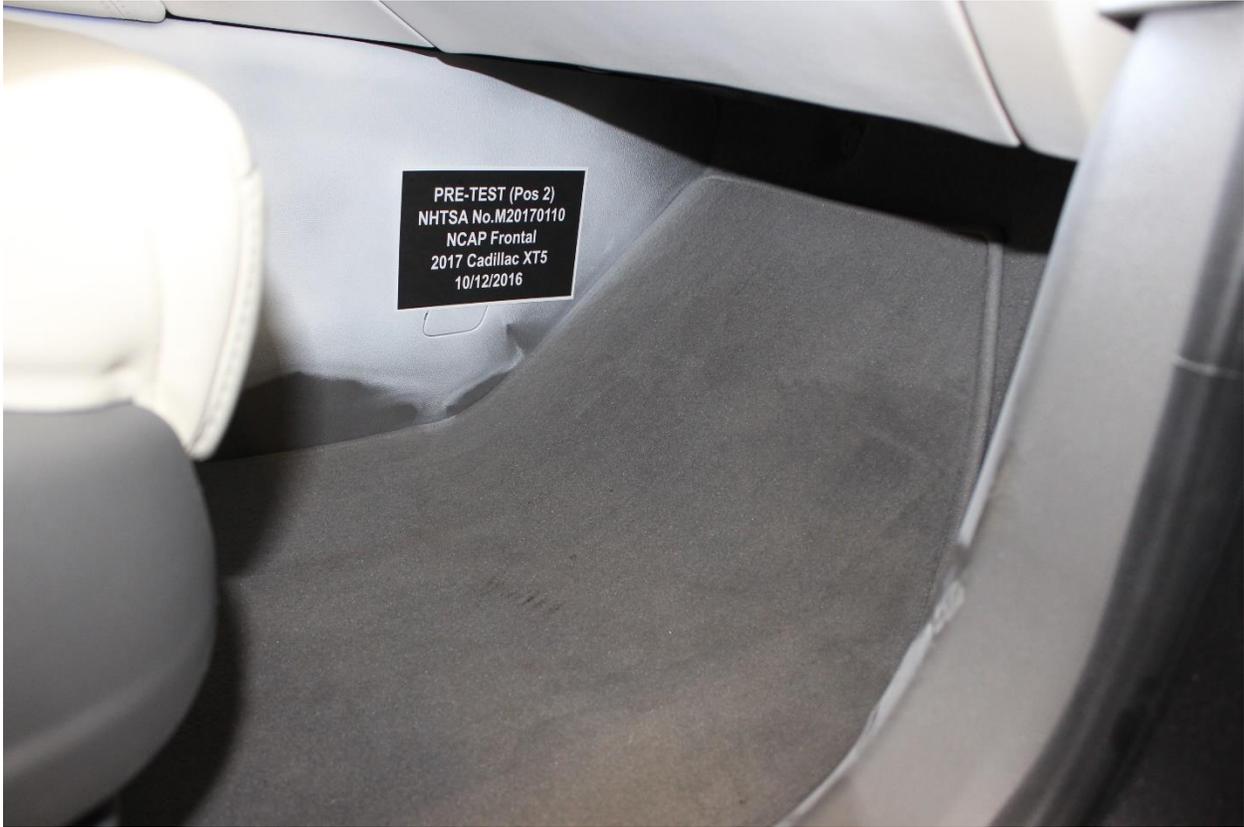


Figure A-65: Pre-Test Passenger's Side Floorpan

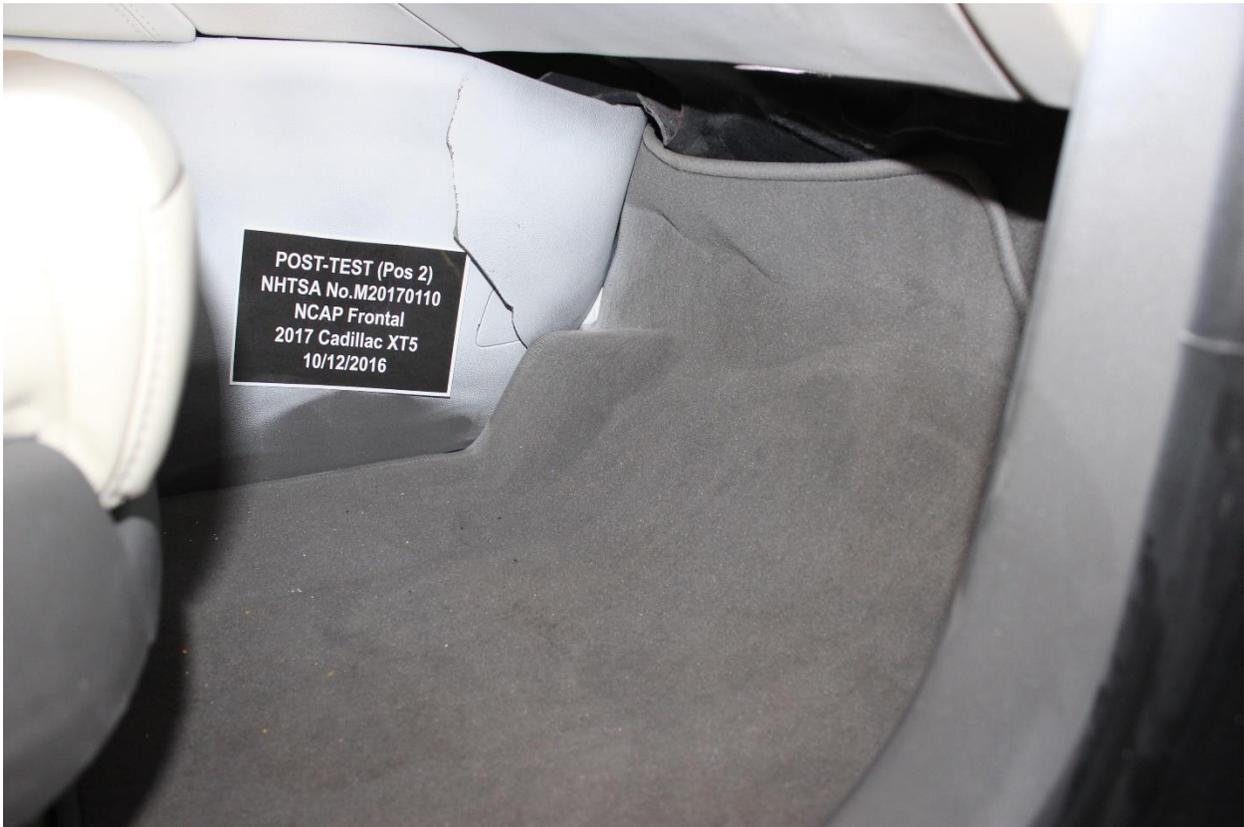


Figure A-66: Post-Test Passenger's Side Floorpan



Figure A-67: Post-Test Passenger Dummy Face



Figure A-68: Post-Test Passenger Dummy Contact With Airbag



Figure A-69: Post-Test Passenger Dummy Contact With Headrest

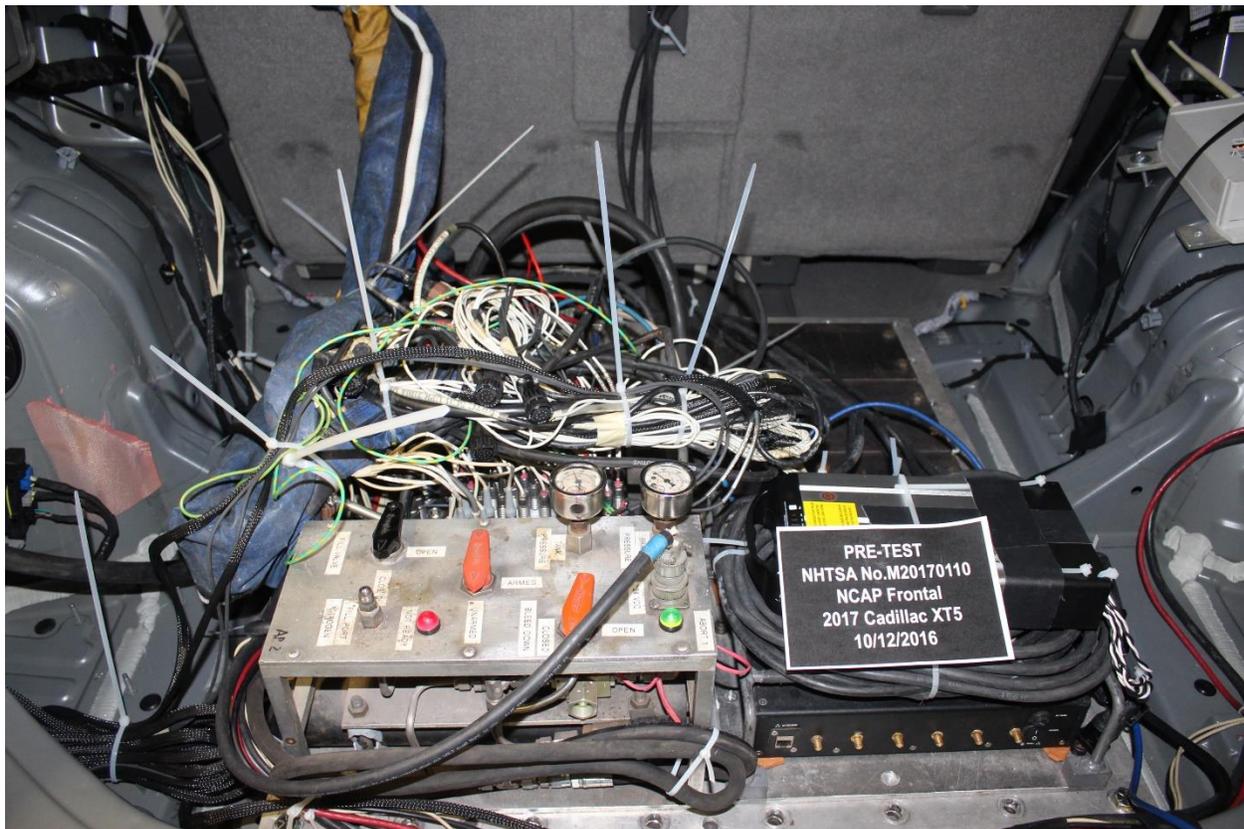


Figure A-70: Photograph of Ballast Installed in Vehicle

Photo Not Applicable

Figure A-71: Post-Test Stoddard Solvent Spillage Location View, If Required



Figure A-72: Post-Test Speed Trap Read-Out



Figure A-73: Vehicle at 0° on Static Rollover Device



Figure A-74: Vehicle at 90° on Static Rollover Device



Figure A-75: Vehicle at 180° on Static Rollover Device



Figure A-76: Vehicle at 270° on Static Rollover Device



Figure A-77: Vehicle at 360° on Static Rollover Device



Figure A-78: 2017 Cadillac XT5 Frontal Impact Event



2017 XT5 LUXURY AWD



EXTERIOR: DARK GRANITE METALLIC ENGINE: 3.6L V6, DI, VVT, W/ INTERIOR: CIRRUS W/ DARK TITANIUM TRANSMISSION, 8-SPD AUTOMATIC ACCENTS

Visit us at www.cadillac.com

STANDARD EQUIPMENT

FROM A LIMITED SELECTION ARE HELD BACK BY EXTRA CHARGE IN THE STANDARD VEHICLE PRICE DESIGN

CADILLAC OWNER BENEFITS

- 4 YEAR / 50,000 MILE BUMPER-TO-BUMPER LIMITED WARRANTY
4 YEAR / 50,000 MILE PREMIUM CARE MAINTENANCE
6 YEAR / 70,000 MILE COURTESY TRANSPORTATION
6 YEAR / 70,000 MILE ROADSIDE ASSISTANCE
6 YEAR / 70,000 MILE POWERTRAIN LIMITED WARRANTY
WHICHEVER COMES FIRST, SEE DEALER FOR DETAILS.
ONSTAR(R) INCLUDES 5 YR BASIC PLAN PLUS 1 YR SERVICE W/ AUTOMATIC CRASH RESPONSE, NAVIGATION & MORE. (SUBJECT TO TERMS SEE ONSTAR.COM)
4G LTE WI-FI(R) HOTSPOT WITH

LIMITED DATA TRIAL AND MORE. (SUBJECT TO TERMS SEE ONSTAR.COM)

PERFORMANCE

- ENGINE: 3.6L V6, DI, VVT, W/ AUTOMATIC STOP/START
TRANSMISSION, 8-SPD AUTOMATIC
ALL WHEEL DRIVE TWIN-CLUTCH SYSTEM
WHEELS, 18" BRIGHT MACHINED FACED W/ LIGHT ARGENT ACCENTS

LUXURY & CONVENIENCE

- LEATHER SEATING SURFACES
FRONT HEATED SEATS
PWR SEAT ADJUSTER, FRONT PASSENGER, 8-WAY
POWER LUMBAR, DRIVER SEAT
SEAT ADJUSTER, PWR PASSENGER LUMBAR CONTROL
DRIVER MEMORY PACKAGE
HEATED STEERING WHEEL
CLIMATE CONTROL, DUAL-ZONE

AUTOMATIC

- CLER(R) INFO & MEDIA CONTROL
AM/FM STEREO WITH 8" COLOR DIAGONAL DISPLAY APPLE CARPLAY(R) CAPABILITY PROVIDED BY APPLE(R) AVAIL. WITH COMPATIBLE SMARTPHONES
XM RADIO 4 SERVICE SUBSCRIPTION SOLD SEPARATELY BY SIRIUSXM(R) AFTER 3 MONTHS
AUD. SYSTEM BOSE(R) 8 SPEAKER
INSIDE REARVIEW MIRROR, AUTO DIMMING
ULTRAVIEW(R) SUNROOF WITH POWER SUNSHADE
UNIVERSAL HOME REMOTE
LIFTGATE, REAR POWER WITH MEMORY HEIGHT
WIRELESS DEVICE CHARGING
EZ KEY PASSIVE ENTRY SYSTEM
STEERING COLUMN, POWER TILT & TELESCOPIC

SAFETY & SECURITY

- ARI BASIS, DRIVER AND FRONT PASSENGER (DUAL STAGE PASS, FRONT AND REAR HEAD CURTAIN, DRIVER SIDE KNEE
REAR VISION CAMERA
SIDE BLIND ZONE ALERT
LANE CHANGE ALERT
REAR CROSS TRAFFIC ALERT
FRONT & REAR PARKING ASSIST

OPTIONS & PRICING

MANUFACTURER'S SUGGESTED RETAIL PRICE

STANDARD VEHICLE PRICE \$47,390.00

OPTIONAL EQUIPMENT (SEE THE MANUFACTURER'S (MSRP) REPLACE STANDARD EQUIPMENT DESIGN)

Table with 2 columns: Option Name, Price. Includes CUE(R) INFO & MEDIA CONTROL (1,025.00)

AVAILABLE WITH COMPATIBLE SMARTPHONES

- BOSE(R) SURROUND SOUND SYSTEM 14 SPEAKERS
DRIVER AWARENESS PACKAGE: 770.00
SAFETY ALERT SEAT
FORWARD COLLISION ALERT
FOLLOWING DISTANCE INDICATOR
LANE KEEP ASSIST WITH LANE DEPARTURE WARNING
FRONT PEDESTRIAN DETECTION
INTELLIBEAM(R) HEADLAMPS
FRONT AUTOMATIC BRAKING, LOW SPEED
DARK GRANITE METALLIC 495.00

TOTAL OPTIONS \$2,290.00

TOTAL VEHICLE & OPTIONS \$49,680.00

DESTINATION CHARGE 995.00

TOTAL VEHICLE PRICE* \$50,675.00

EPA DOT Fuel Economy and Environment. You spend \$1,750 more in fuel costs over 5 years compared to the average new vehicle. Annual fuel cost \$1,750. Fuel Economy & Greenhouse Gas Rating 4. Smog Rating 5.

GOVERNMENT 5-STAR SAFETY RATINGS. This vehicle has not been rated by the government for overall vehicle score, frontal crash, side crash or rollover risk. Source: National Highway Traffic Safety Administration (NHTSA) www.safercar.gov or 1-888-327-4236





PARTS CONTENT INFORMATION. FOR VEHICLES IN THIS CARLINE: U.S./CANADIAN PARTS CONTENT: 65%. FOR THIS VEHICLE: FINAL ASSEMBLY POINT: SPRING HILL, TN U.S.A. COUNTRY OF ORIGIN: ENGINE: UNITED STATES TRANSMISSION: JAPAN. VIN 1GYKNDRS2H2146173





Figure A-79: Monroney Label Photograph





APPENDIX B
VEHICLE & DUMMY RESPONSE DATA TRACES





Table of Data Plots





No.	Description	Page
Plot 1	Driver Head X Acceleration vs. Time Primary	B-3
Plot 2	Driver Head Y Acceleration vs. Time Primary	B-3
Plot 3	Driver Head Z Acceleration vs. Time Primary	B-3
Plot 4	Driver Head Resultant Acceleration vs. Time Primary	B-3
Plot 5	Driver Chest X Deflection vs. Time	B-4
Plot 6	Driver Chest X Acceleration vs. Time Primary	B-4
Plot 7	Driver Chest Y Acceleration vs. Time Primary	B-4
Plot 8	Driver Chest Z Acceleration vs. Time Primary	B-4
Plot 9	Driver Chest Resultant Acceleration vs. Time Primary	B-5
Plot 10	Driver Upper Neck Force X vs. Time Primary	B-5
Plot 11	Driver Upper Neck Force Z vs. Time Primary	B-5
Plot 12	Driver Upper Neck Moment Y vs. Time Primary	B-5
Plot 13	Driver Nij vs. Time Primary	B-6
Plot 14	Driver Left Femur Force vs. Time	B-6
Plot 15	Driver Right Femur Force vs. Time	B-6
Plot 16	Passenger Head X Acceleration vs. Time Primary	B-6
Plot 17	Passenger Head Y Acceleration vs. Time Primary	B-7
Plot 18	Passenger Head Z Acceleration vs. Time Primary	B-7
Plot 19	Passenger Head Resultant Acceleration vs. Time Primary	B-7
Plot 20	Passenger Chest X Deflection vs. Time	B-7
Plot 21	Passenger Chest X Acceleration vs. Time Primary	B-8
Plot 22	Passenger Chest Y Acceleration vs. Time Primary	B-8
Plot 23	Passenger Chest Z Acceleration vs. Time Primary	B-8
Plot 24	Passenger Chest Resultant Acceleration vs. Time Primary	B-8
Plot 25	Passenger Upper Neck Force X vs. Time Primary	B-9
Plot 26	Passenger Upper Neck Force Z vs. Time Primary	B-9
Plot 27	Passenger Upper Neck Moment Y vs. Time Primary	B-9
Plot 28	Passenger Nij vs. Time Primary	B-9
Plot 29	Passenger Left Femur Force vs. Time	B-10
Plot 30	Passenger Right Femur Force vs. Time	B-10

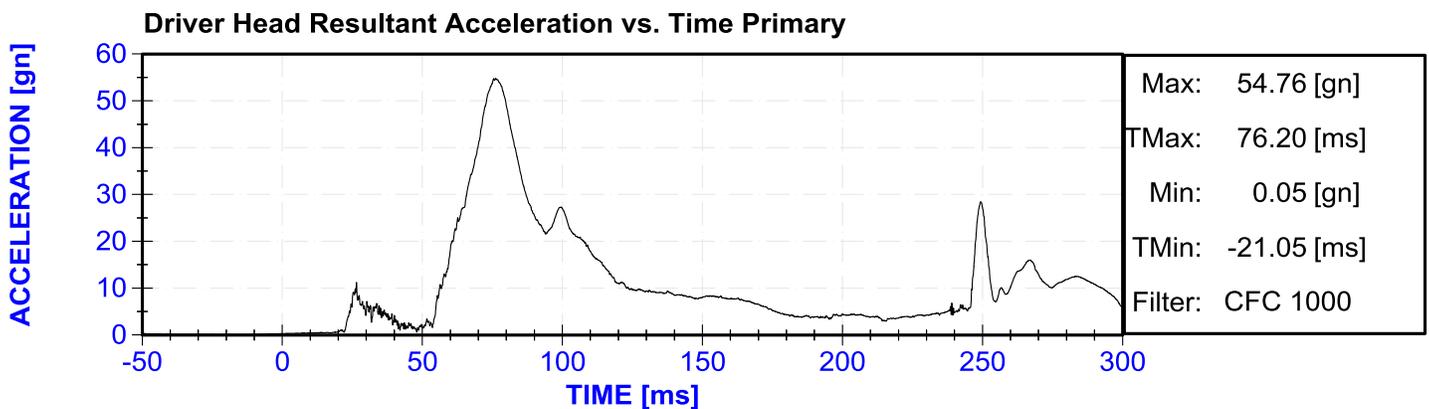
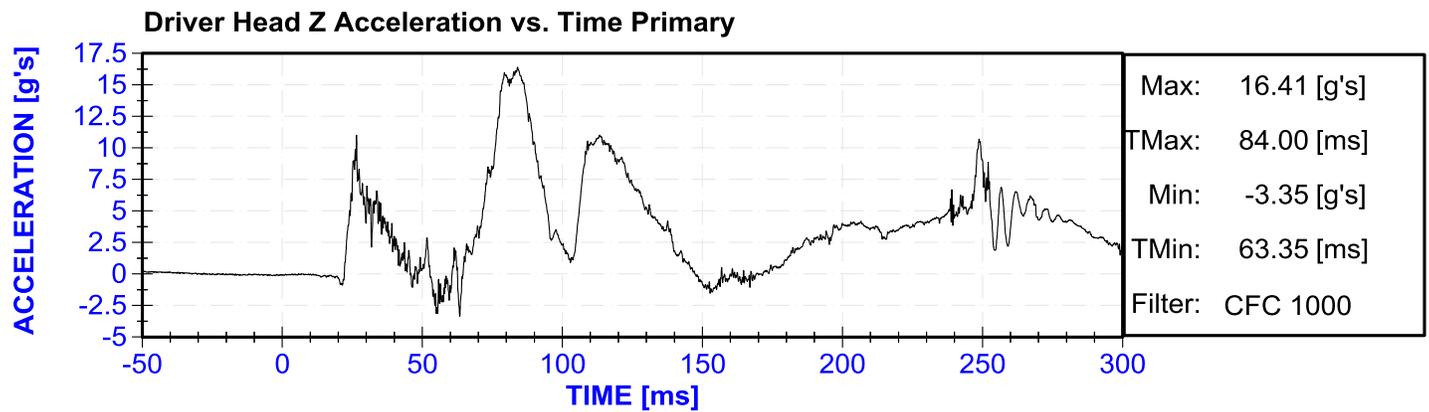
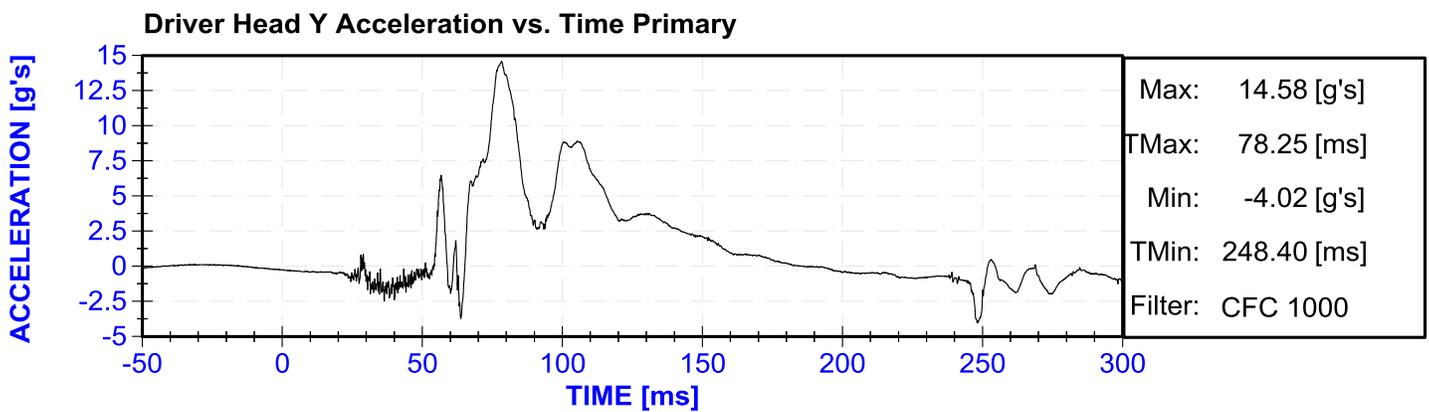
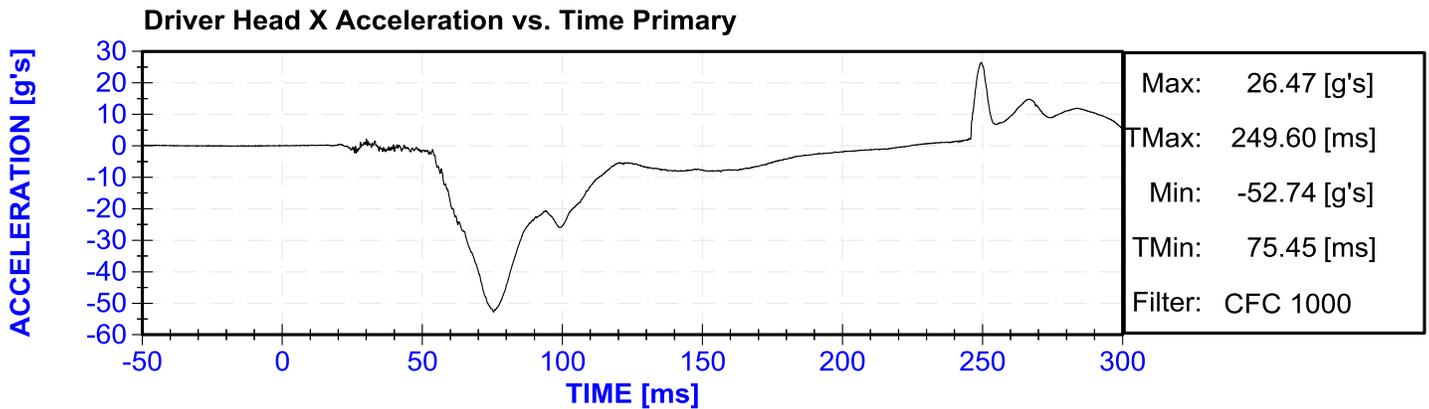


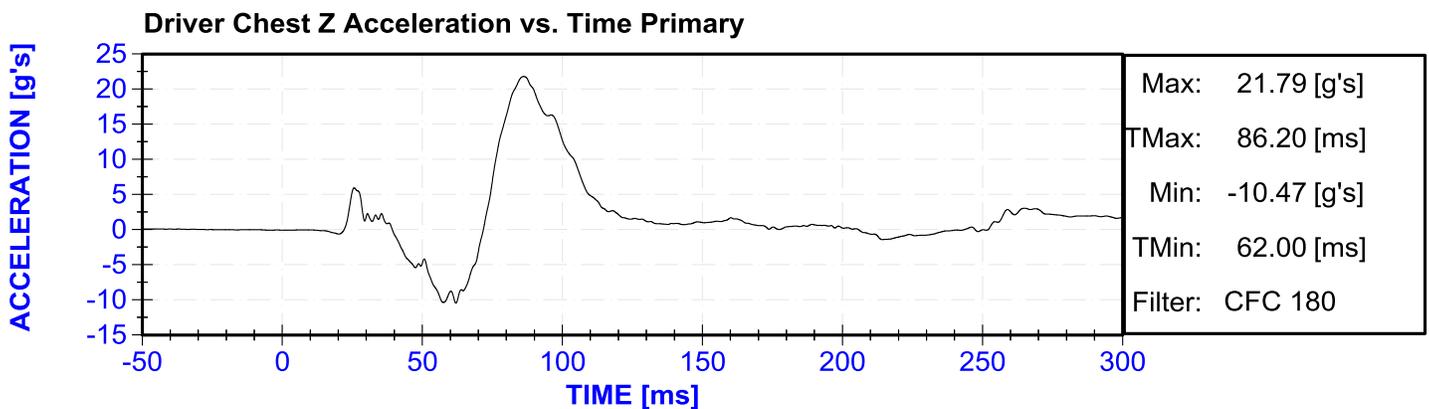
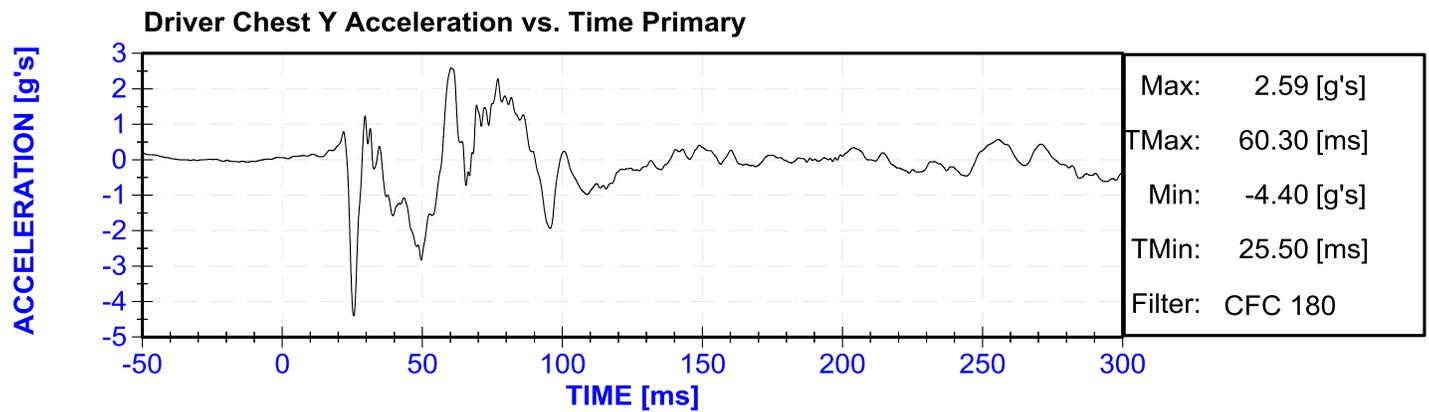
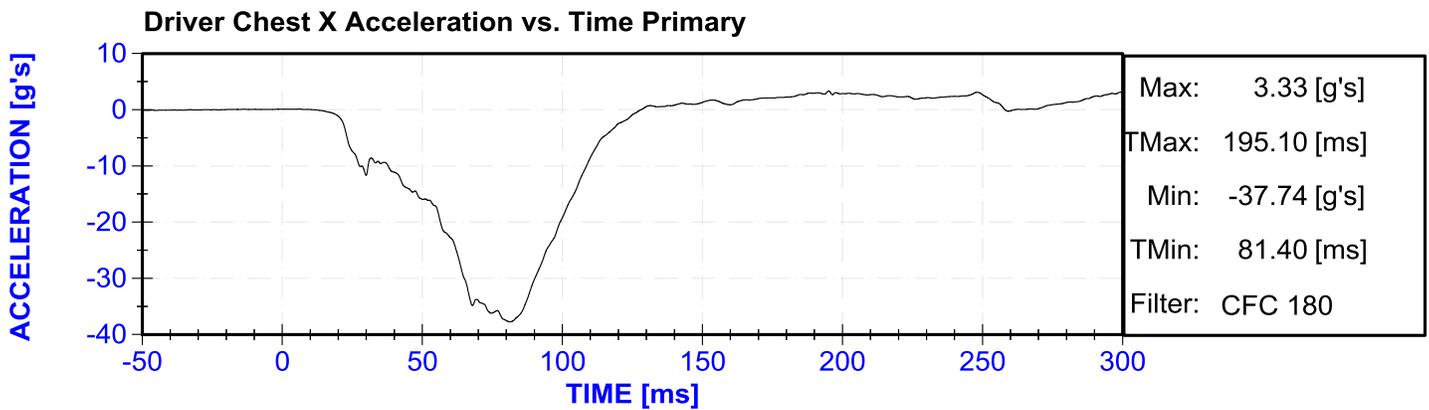
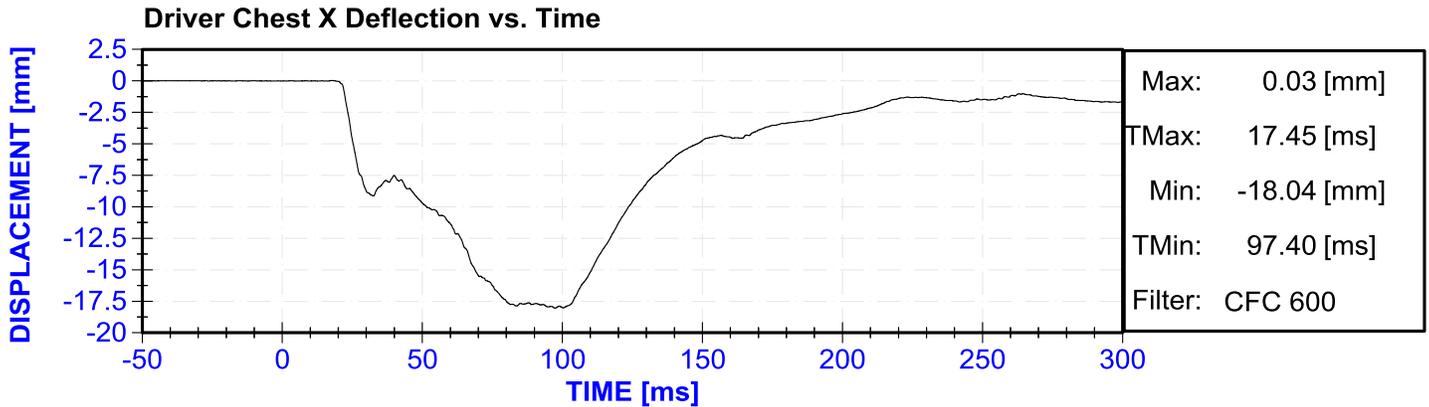


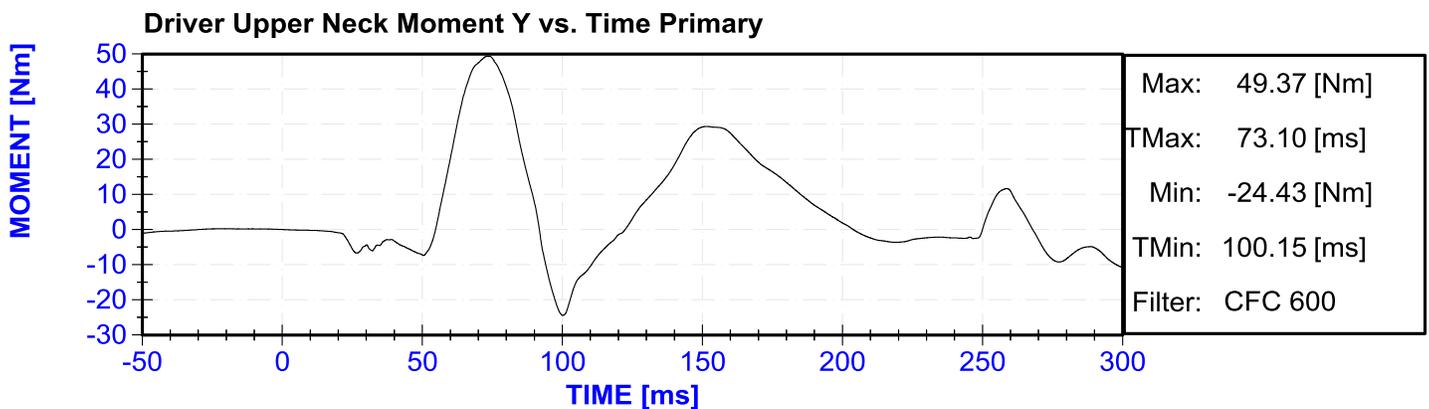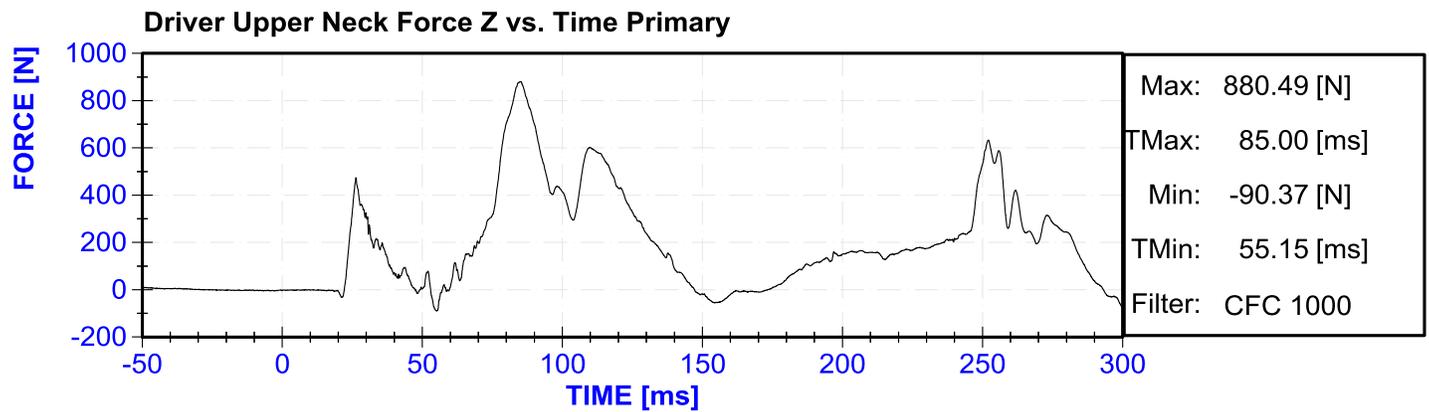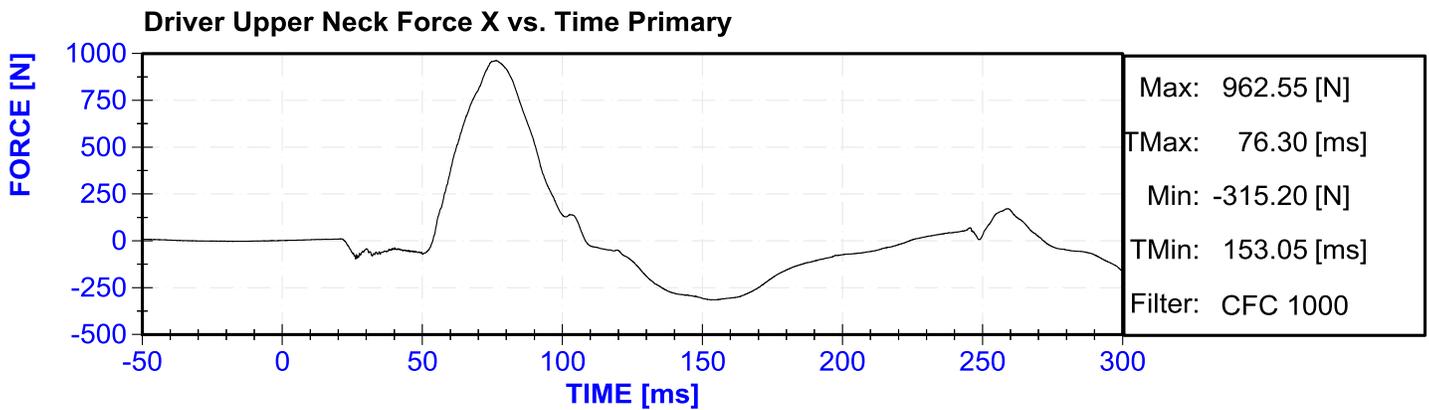
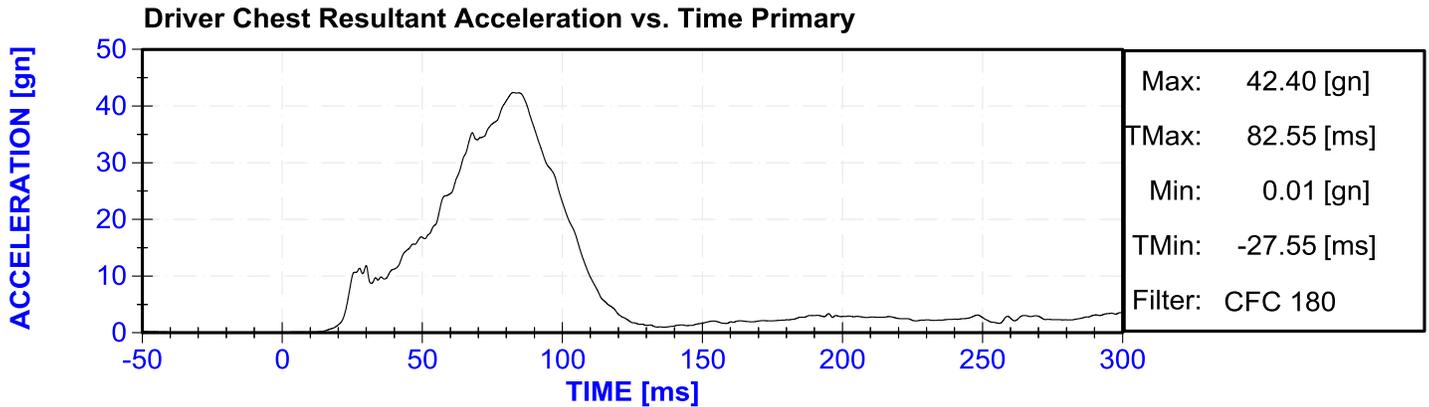


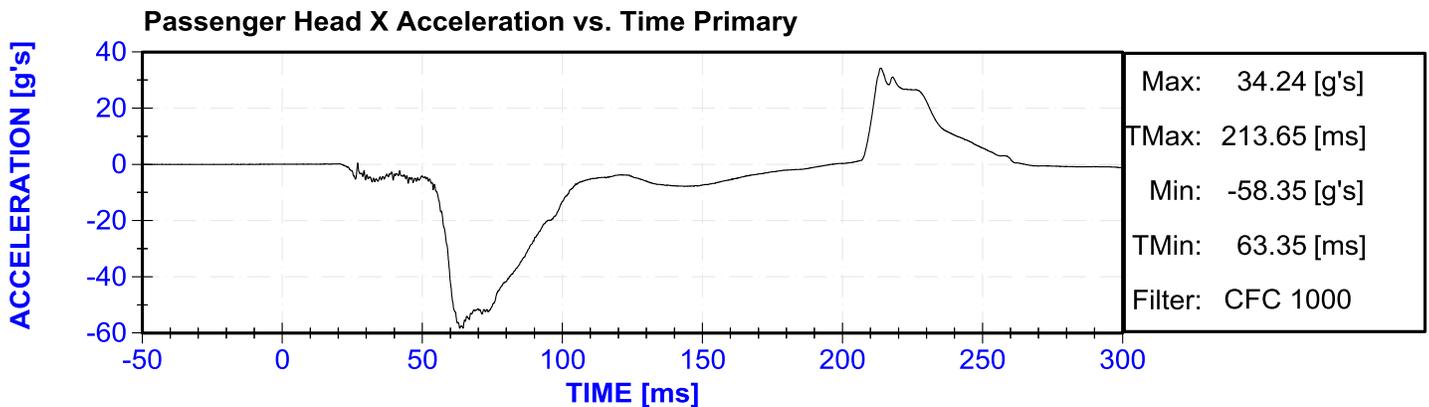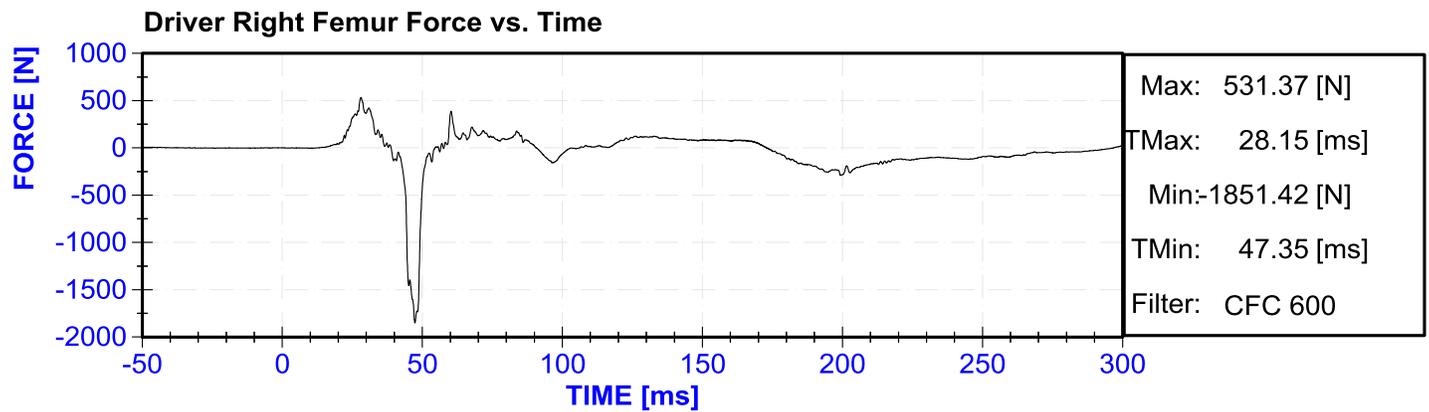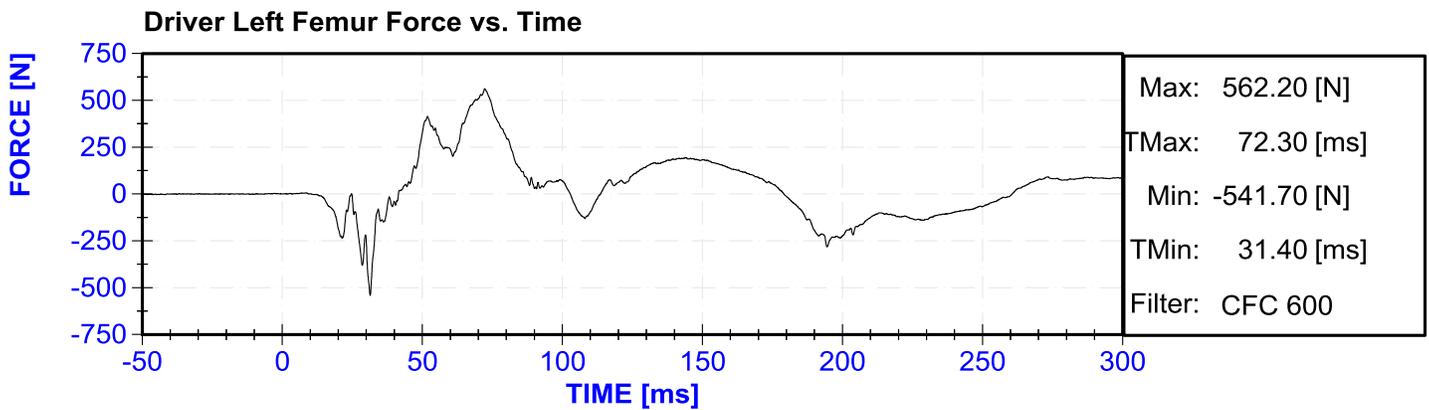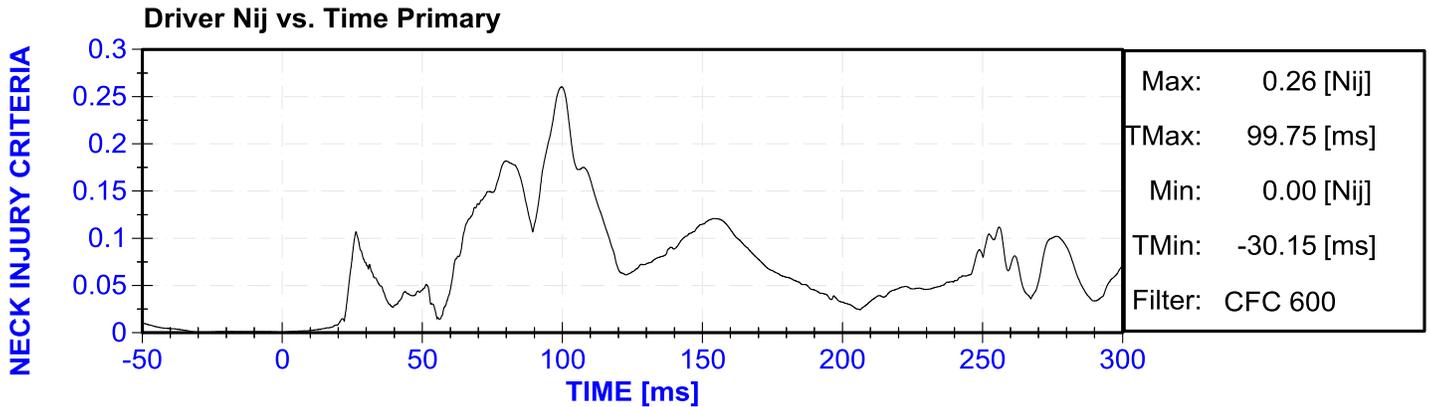

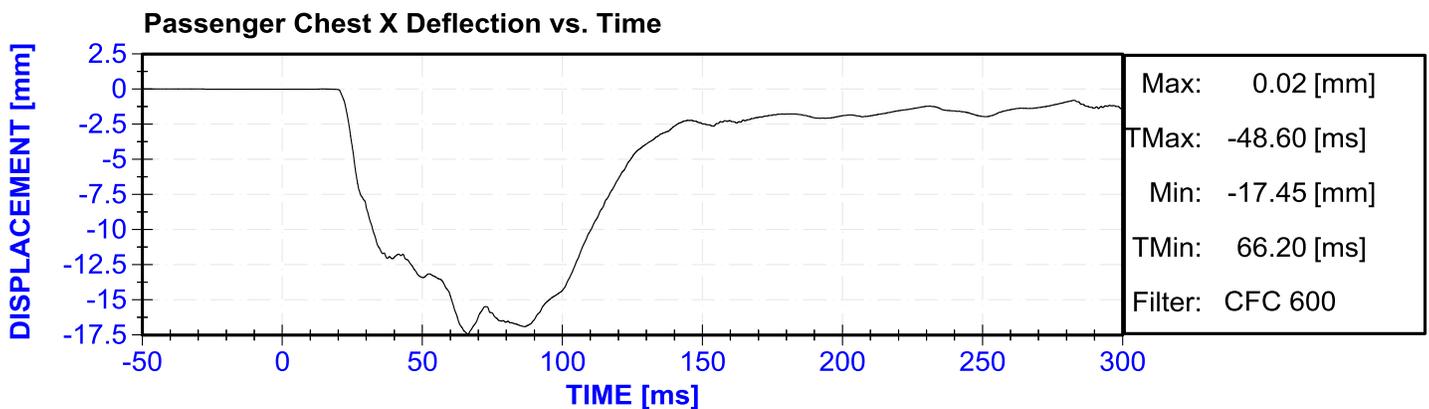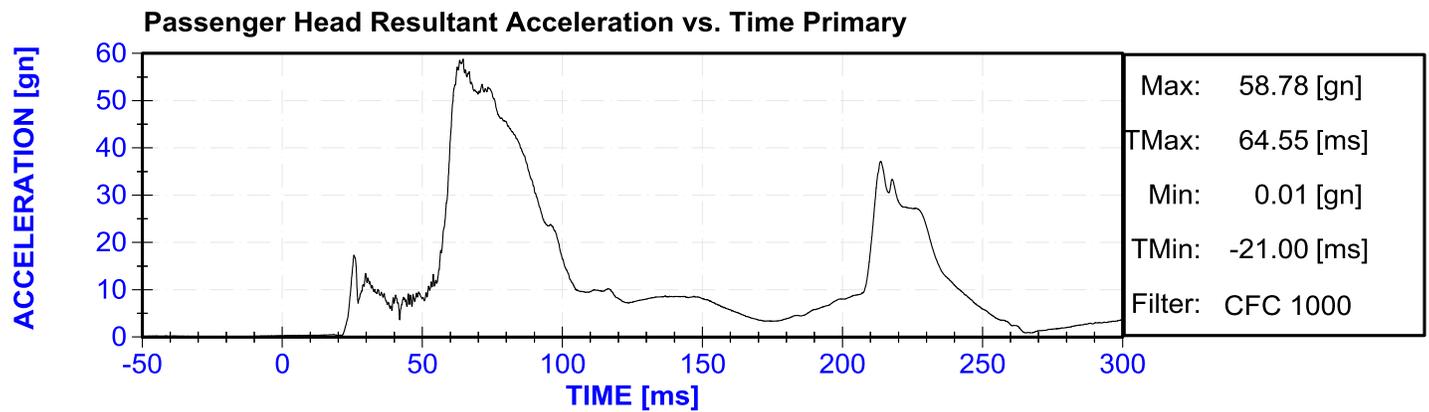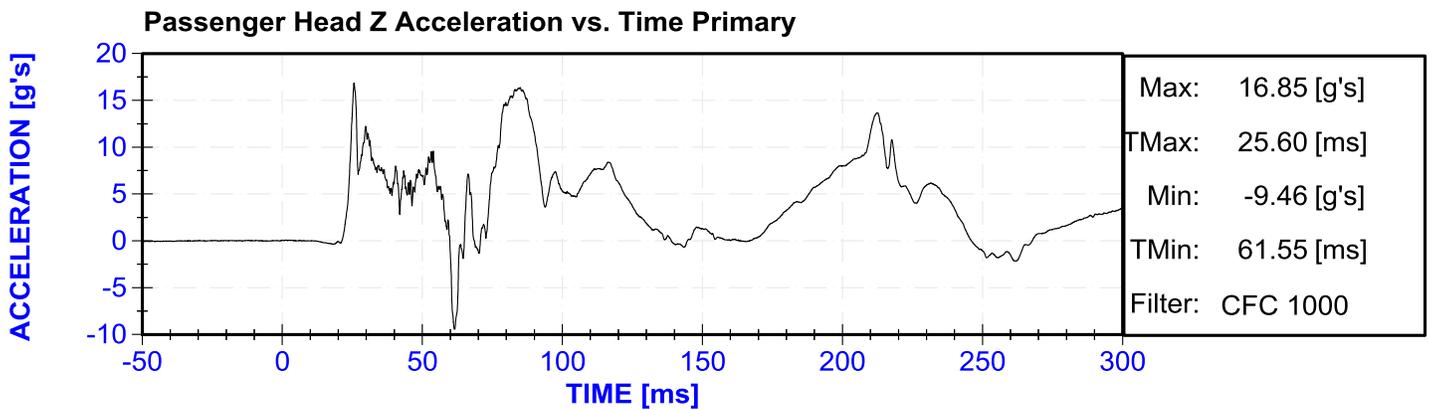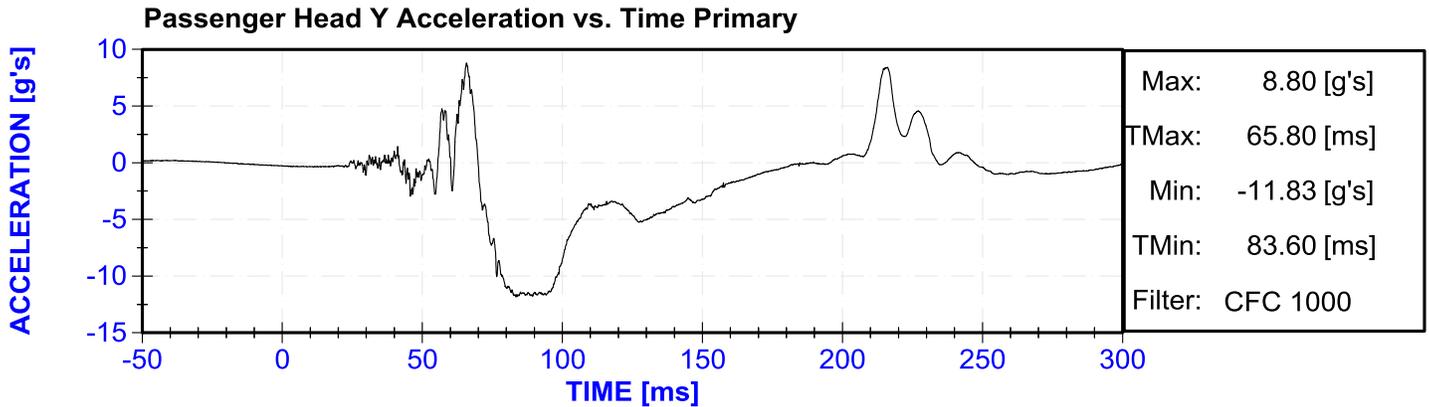

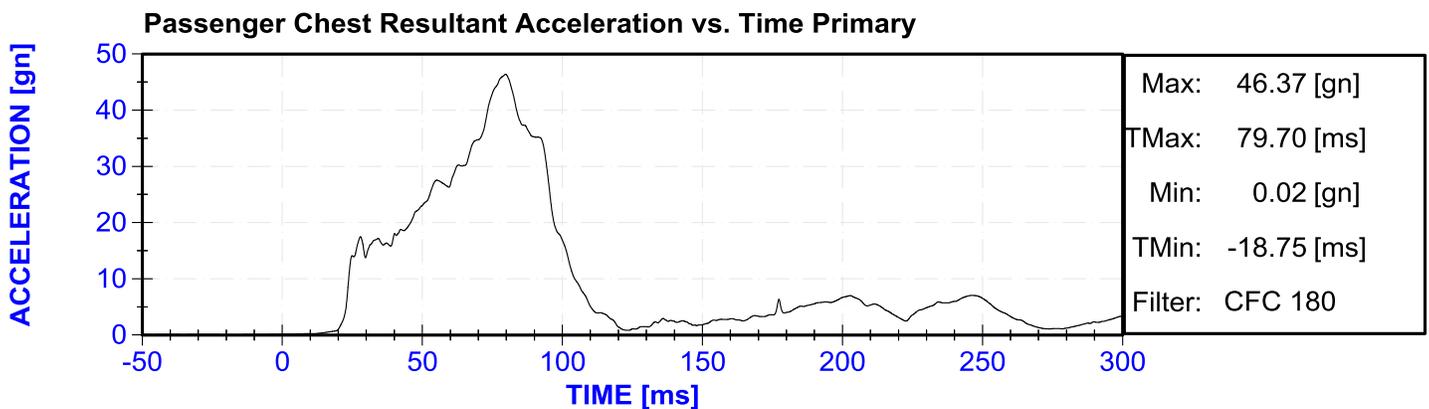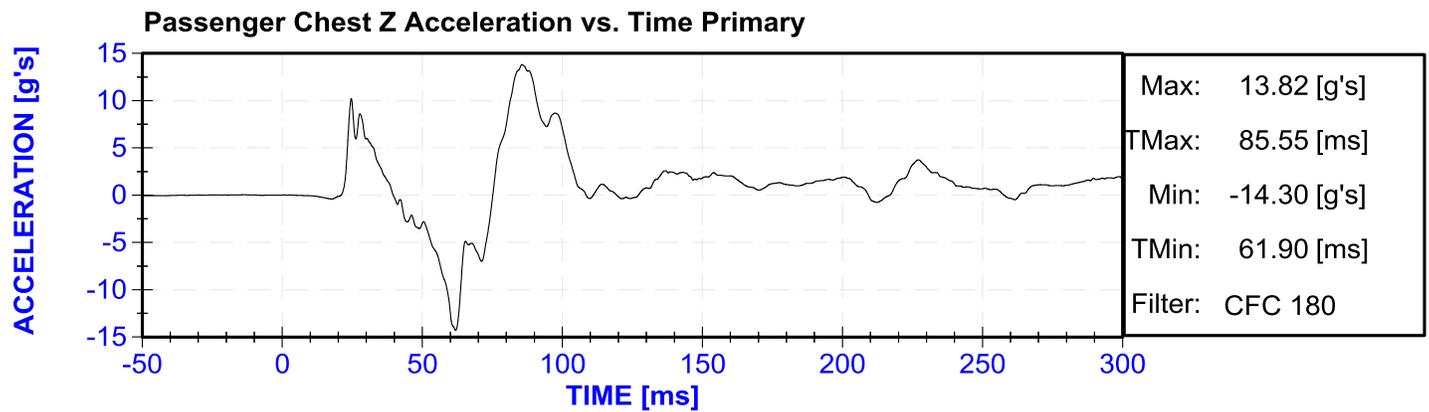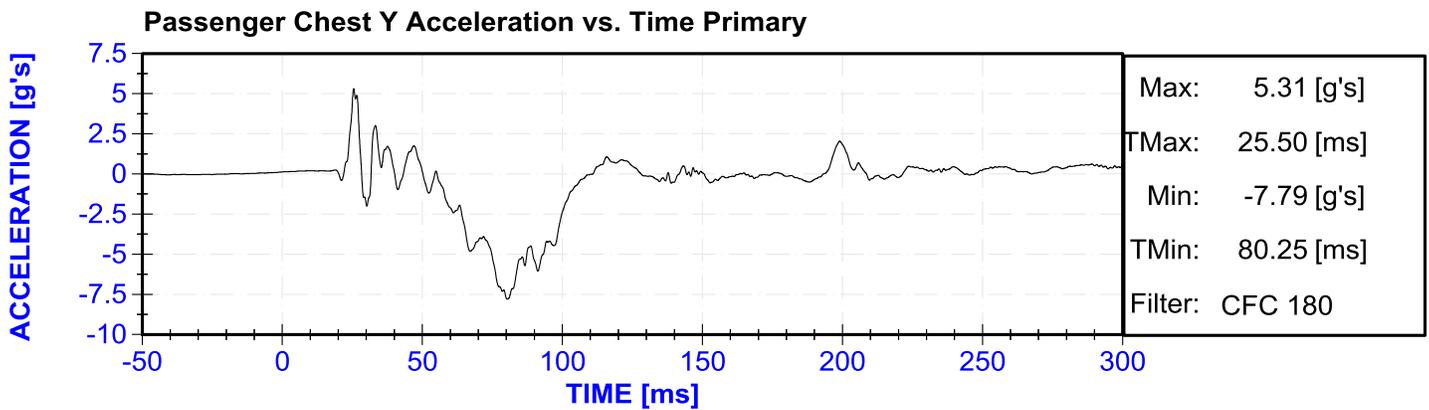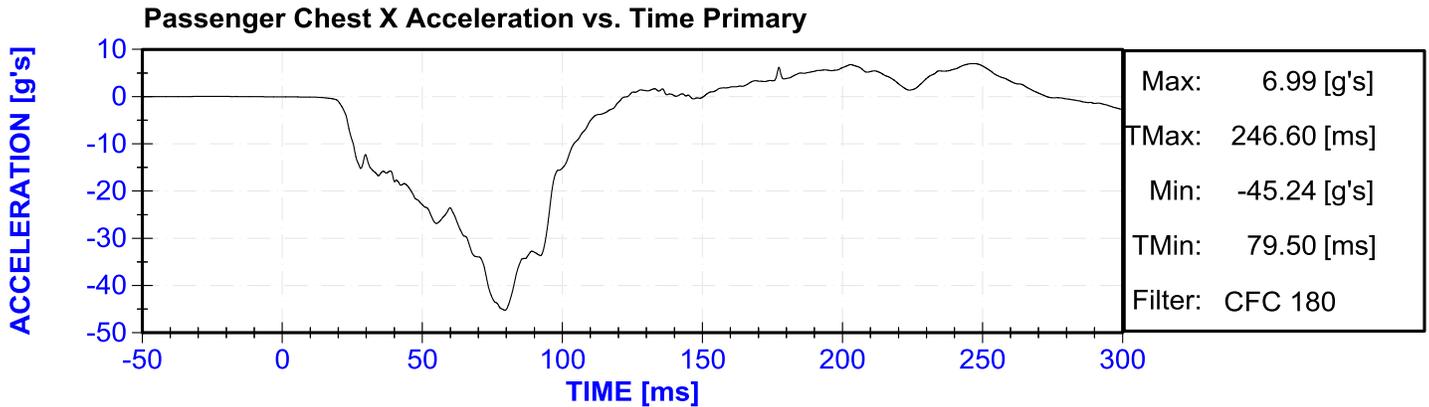

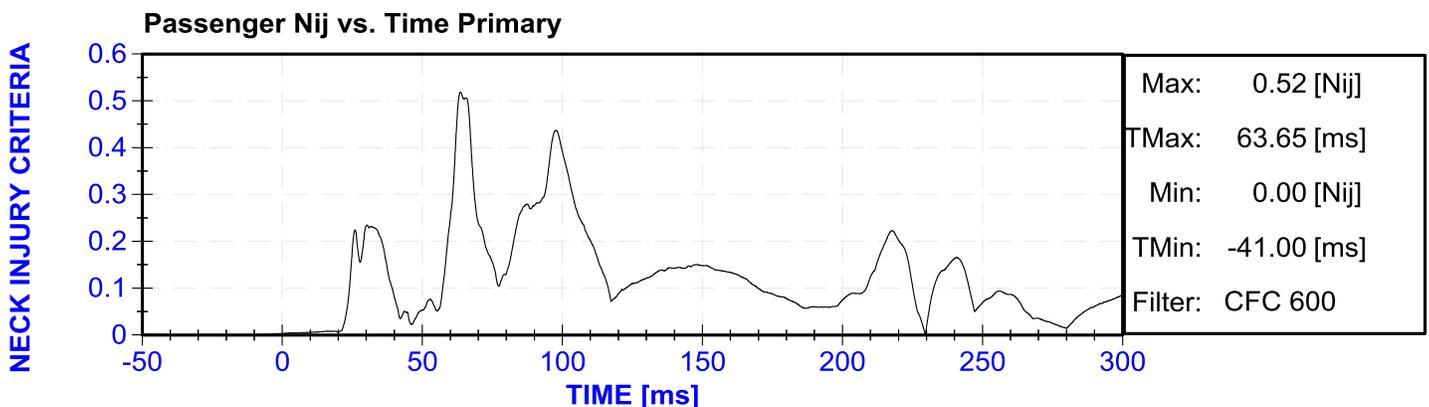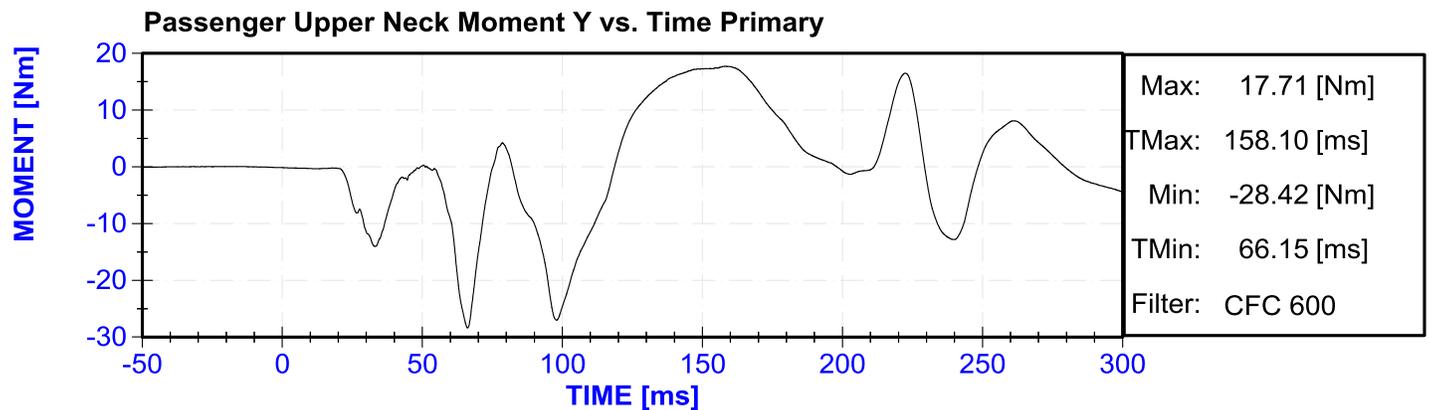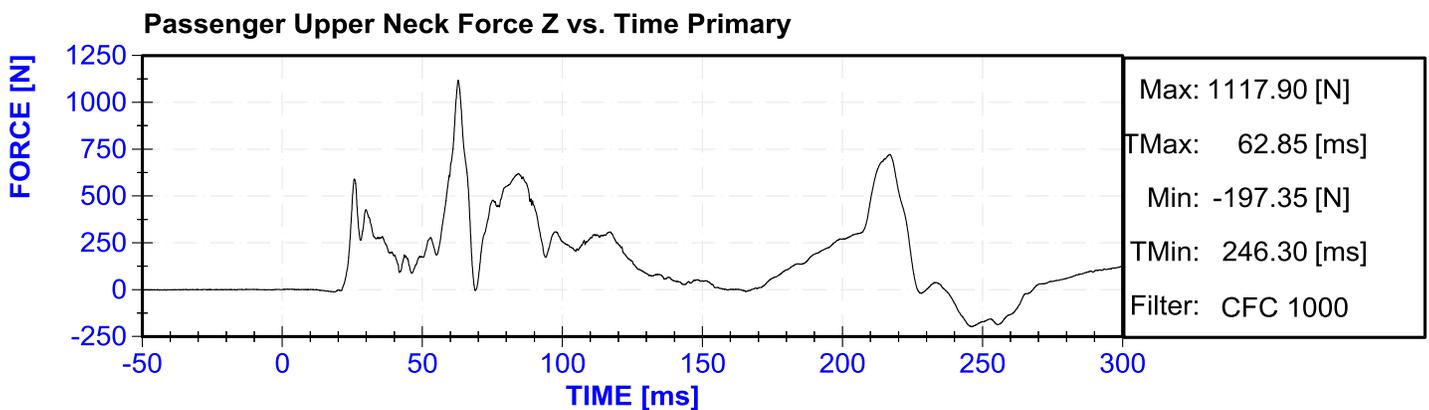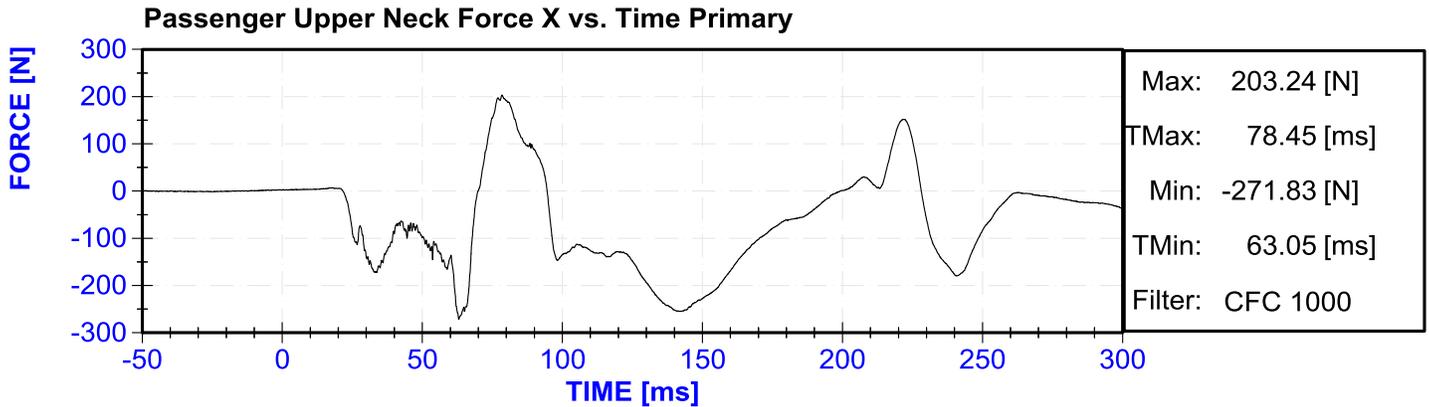

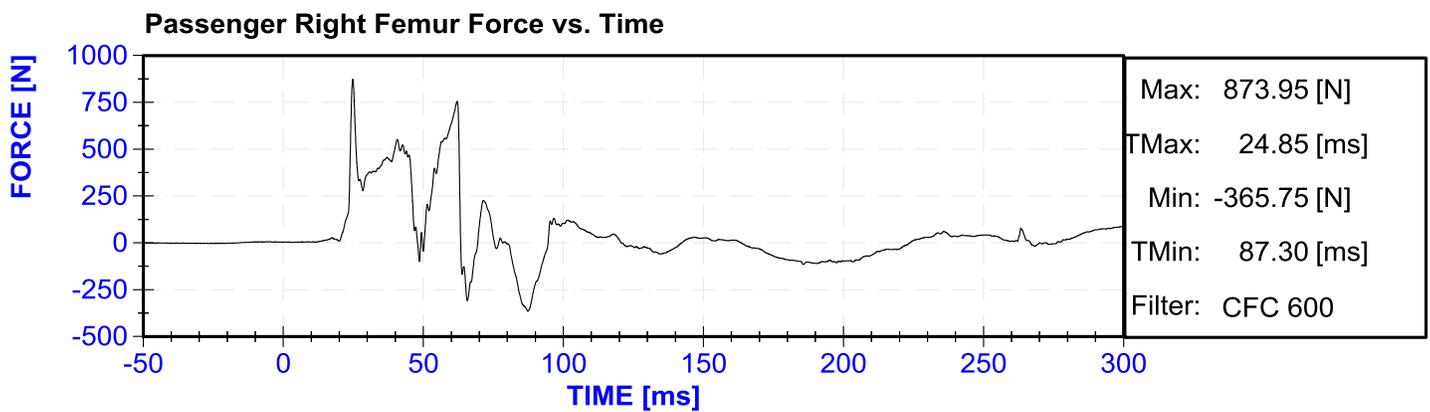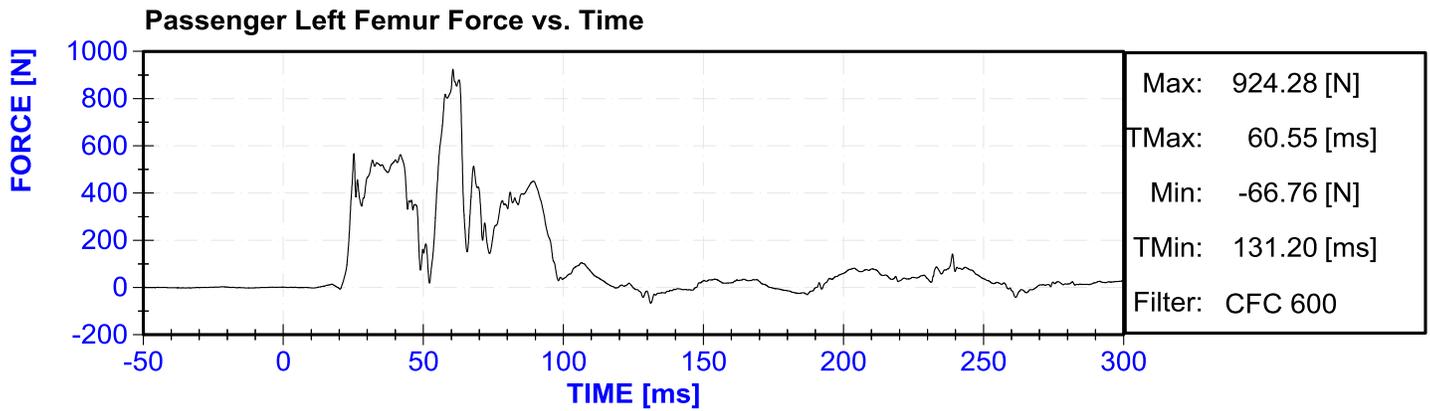

APPENDIX C

DUMMY CALIBRATION AND PERFORMANCE VERIFICATION DATA

CALIBRATION TEST RESULTS

PRE-TEST

HYBRID III 50TH PERCENTILE MALE - DRIVER ATD

SERIAL NO: 1046





External Measurements - Hybrid 3 - 50th Male

Technician: M.Hartung

Date: 9/21/2016

Dummy Serial Number: 1046

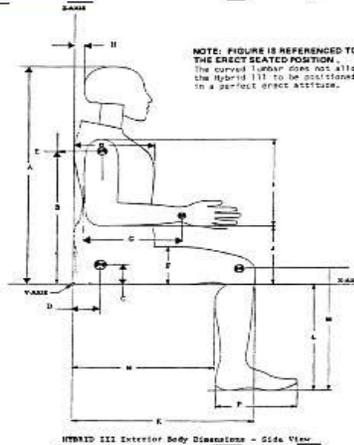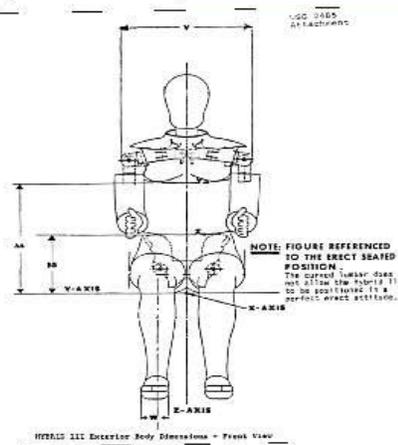

Symbol	Description	Specification (in)	Result (in)	Pass/Fail
A	Sitting Height	34.6 35.0	34.8	Pass
B	Shoulder Pivot Height	19.9 20.5	20.1	Pass
C	H-Point Height	3.3 3.5	3.3	Pass
D	H-Point from Backline	5.3 5.5	5.4	Pass
E	Shoulder Pivot from Backline	3.3 3.7	3.5	Pass
F	Thigh Clearance	5.5 6.1	5.7	Pass
G	Back of Elbow to Wrist Pivot	11.4 12.0	11.8	Pass
H	Head Back to Backline	1.6 1.8	1.7	Pass
I	Shoulder to Elbow Length	13.0 13.6	13.3	Pass
J	Elbow Rest Height	7.5 8.3	8.0	Pass
K	Buttock to Knee Length	22.8 23.8	23.1	Pass
L	Popliteal Height	16.9 17.9	17.3	Pass
M	Knee Pivot Height	19.1 19.7	19.3	Pass
N	Buttock Popliteal Length	17.8 18.8	18.1	Pass
O	Chest Depth without Jacket	8.4 9.0	8.5	Pass
P	Foot Length (right)	9.9 10.5	10.1	Pass
V	Shoulder Breadth	16.3 17.2	16.9	Pass
W	Foot Breadth	3.6 4.2	4.0	Pass
Y	Chest Circumference with Jacket	38.2 39.4	39.1	Pass
Z	Waist Circumference	32.9 34.1	33.3	Pass
AA	Reference Location (Chest Circumference)	16.9 17.1	17.0	Pass
BB	Reference Location (Waist Circumference)	8.9 9.1	9.0	Pass


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	1046	Laboratory Supervisor	M. Goehle




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.9	Pass
Humidity	10	70	%	53.8	Pass
Resultant Acceleration	225	275	g's	257.8	Pass
Oscillation	0	10	%	3.0	Pass
Lateral Acceleration	-15	15	g's	2.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P58871	9/19/2016	3/20/2017
Y Accelerometer	ENDEVCO 7264	AC-P12359	9/19/2016	3/20/2017
Z Accelerometer	ENDEVCO 7264CT	AC-P52133	9/19/2016	3/20/2017

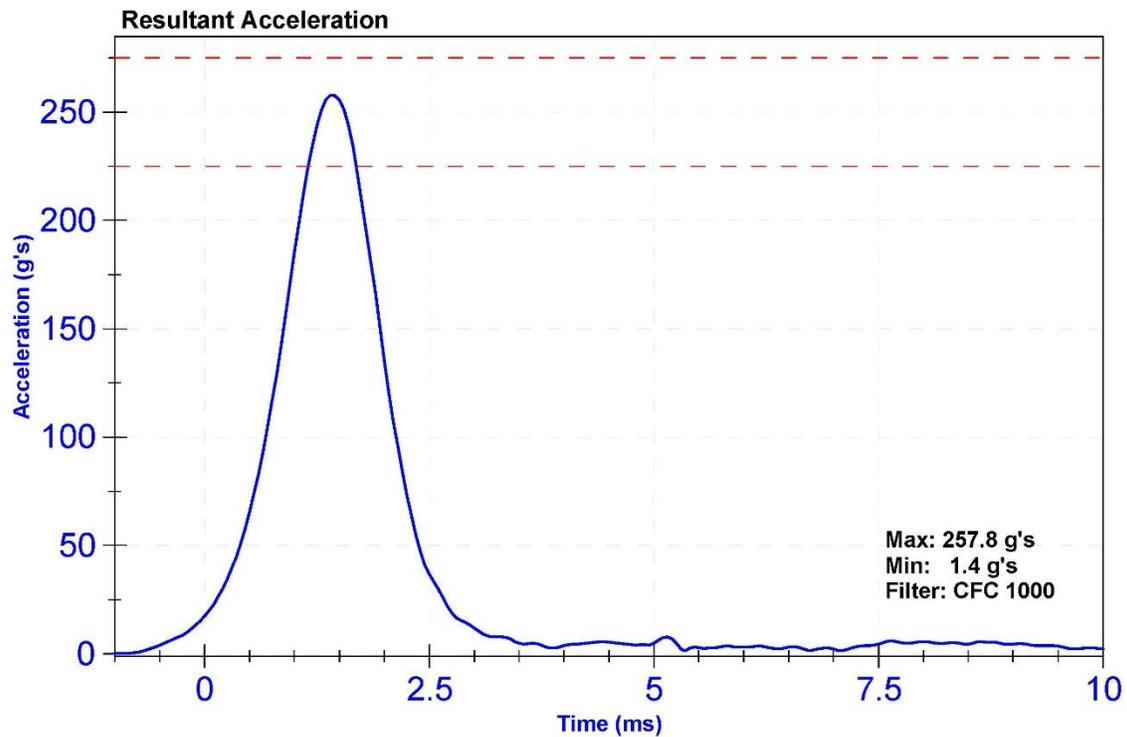

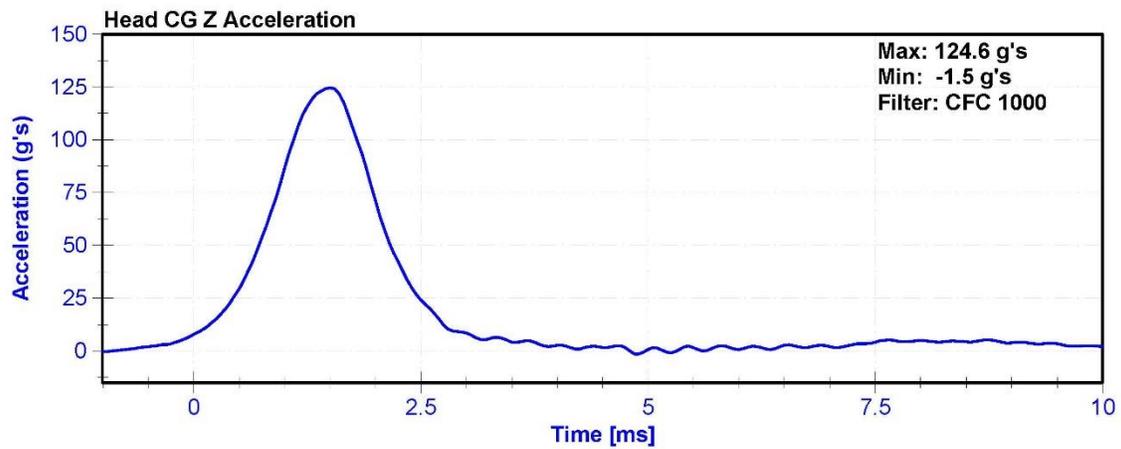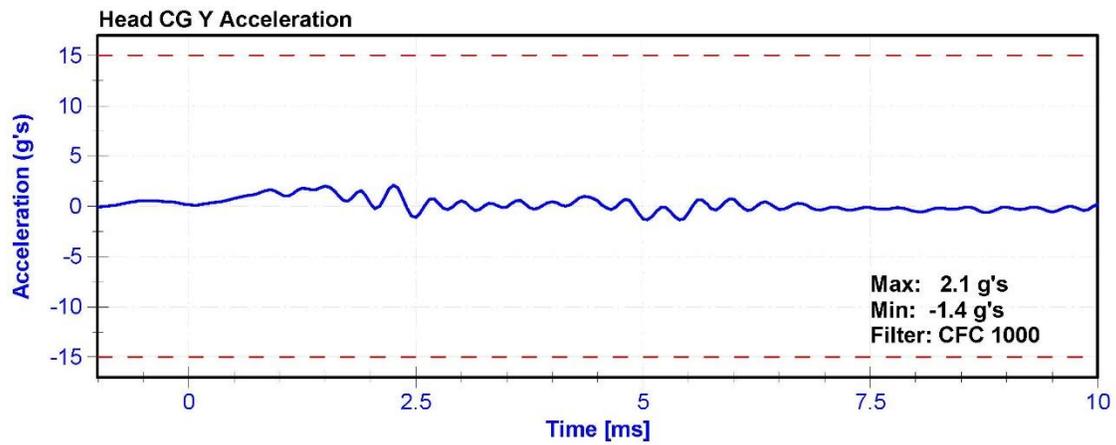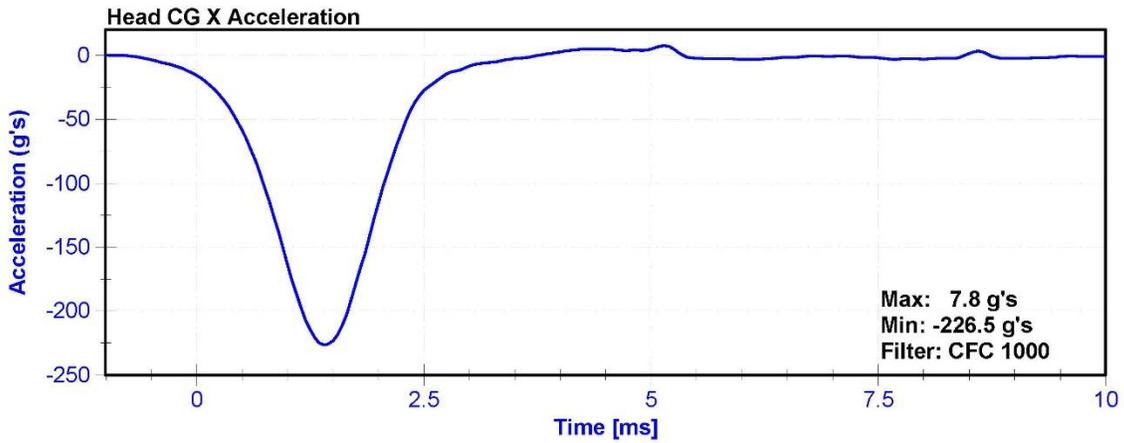

ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	1046	Laboratory Supervisor	M.Goehle


Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.0	Pass
Humidity	10	70	%	53.1	Pass
Velocity	6.89	7.13	m/s	7.037	Pass
Pendulum Deceleration at 10ms	22.5	27.5	g's	23.55	Pass
Pendulum Deceleration at 20ms	17.6	22.6	g's	21.17	Pass
Pendulum Deceleration at 30ms	12.5	18.5	g's	15.99	Pass
Max. Pendulum Deceleration After 30ms	0	29	g's	24.3	Pass
Pendulum Deceleration Time to 5 g's	34	42	ms	39.0	Pass
Maximum D Plane Rotation	64	78	deg	72.4	Pass
Time to Maximum Rotation	57	64	ms	59.8	Pass
Rotation Decay to Zero	113	127	ms	113.9	Pass
Moment About Occipital Condyle	88.1	108.4	Nm	93.01	Pass
Time to Maximum Moment	47	58	ms	53.5	Pass
Moment Decay to Zero	97	107	ms	100.4	Pass


Transducer Calibrations




Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5F3	5/10/2016	5/10/2017
Pendulum Potentiometer	ETI SP22G	DS-PendPot	9/28/2015	9/27/2016
Condyle Potentiometer	ETI SP22G	DS-CondPot	9/28/2015	9/27/2016
Upper Neck Load Cell	DENTON 1716A	LC-2186Fx	5/24/2016	5/24/2017

D-Plane Rotation

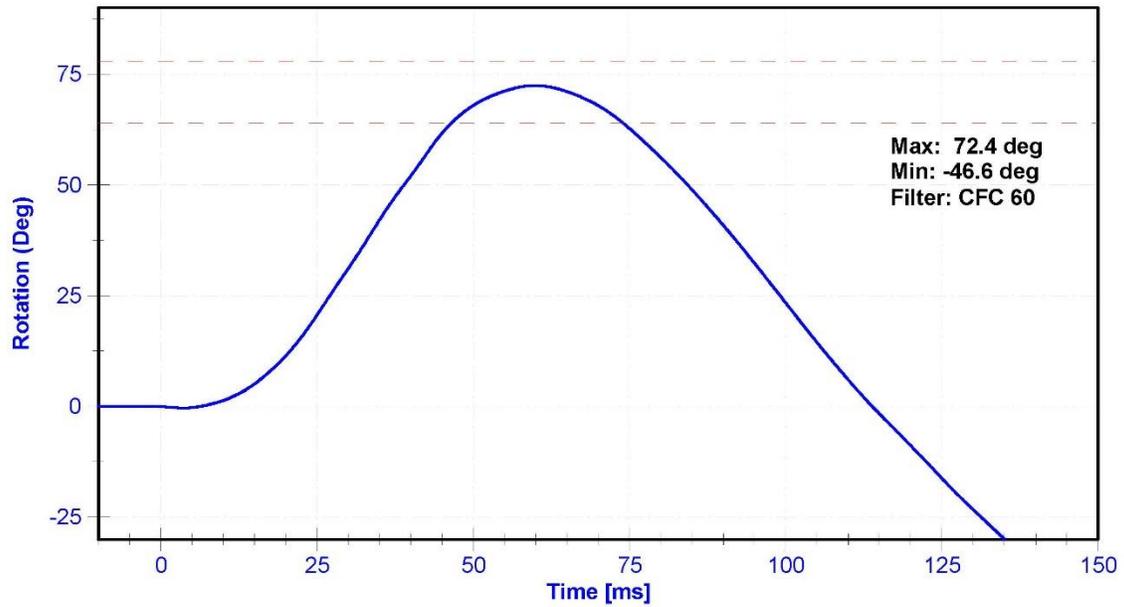

Moment About Occipital Condyle

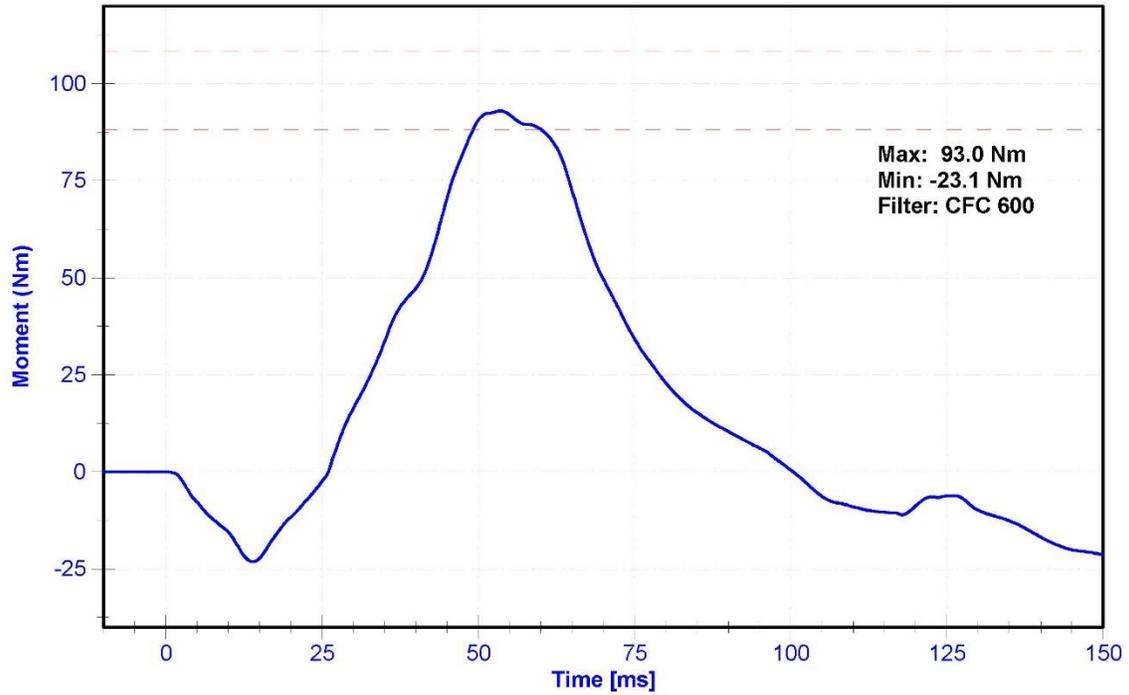

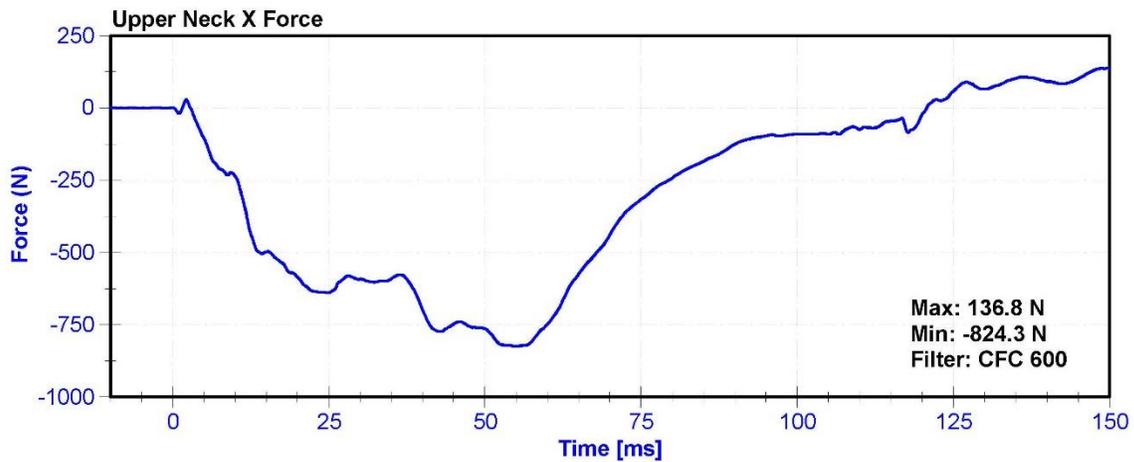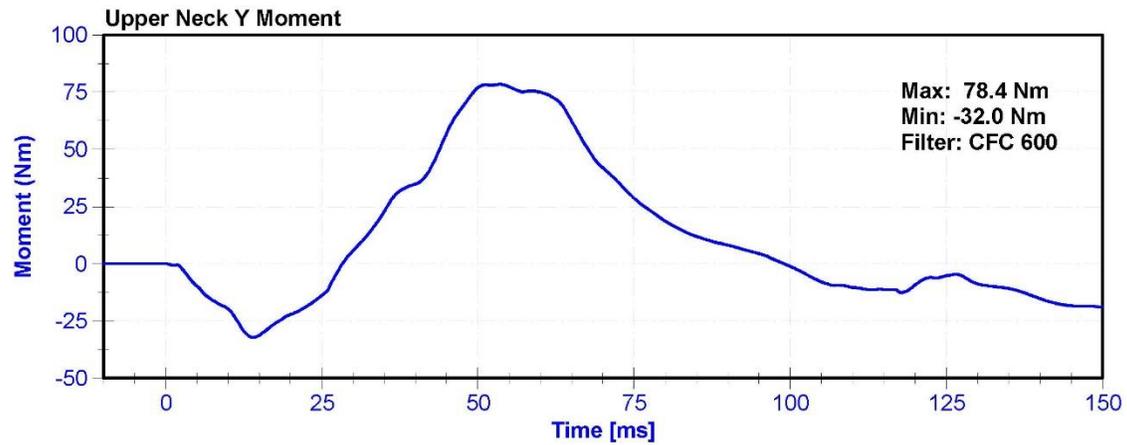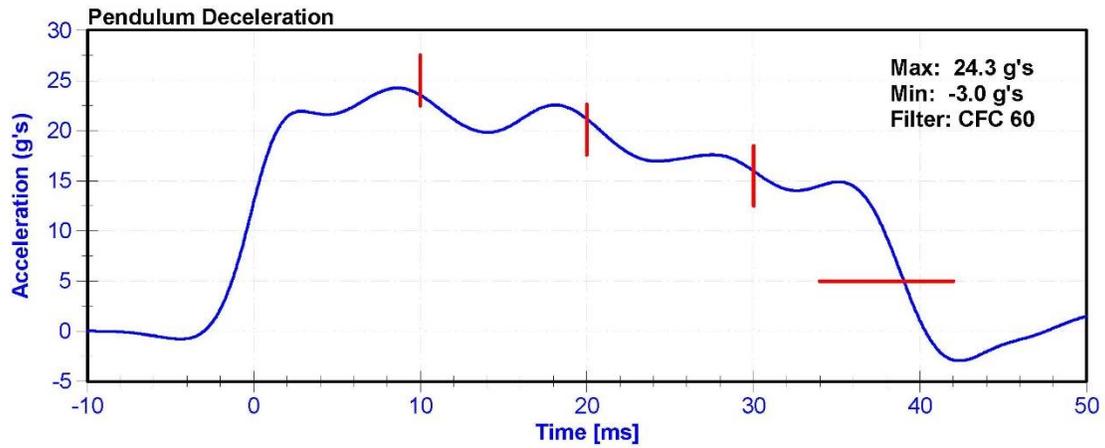

ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	1046	Laboratory Supervisor	M.Goehle


Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	47.7	Pass
Velocity	5.94	6.19	m/s	6.068	Pass
Pendulum Deceleration at 10ms	17.2	21.2	g's	20.70	Pass
Pendulum Deceleration at 20ms	14	19	g's	17.6	Pass
Pendulum Deceleration at 30ms	11	16	g's	13.1	Pass
Max. Pendulum Deceleration After 30ms	0	22	g's	21.7	Pass
Pendulum Deceleration Time to 5 g's	38	46	ms	40.1	Pass
Maximum D Plane Rotation	81	106	deg	94.9	Pass
Time to Maximum Rotation	72	82	ms	75.9	Pass
Rotation Decay to Zero	147	174	ms	157.6	Pass
Minimum Moment About OC	-80	-52.9	Nm	-65.20	Pass
Time to Minimum Moment	65	79	ms	69.5	Pass
Moment Decay to Zero	120	148	ms	138.7	Pass


Transducer Calibrations




Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5F3	5/10/2016	5/10/2017
Pendulum Potentiometer	ETI SP22G	DS-PendPot	9/28/2015	9/27/2016
Condyle Potentiometer	ETI SP22G	DS-CondPot	9/28/2015	9/27/2016
Upper Neck Load Cell	DENTON 1716A	LC-2186Fx	5/24/2016	5/24/2017

D-Plane Rotation

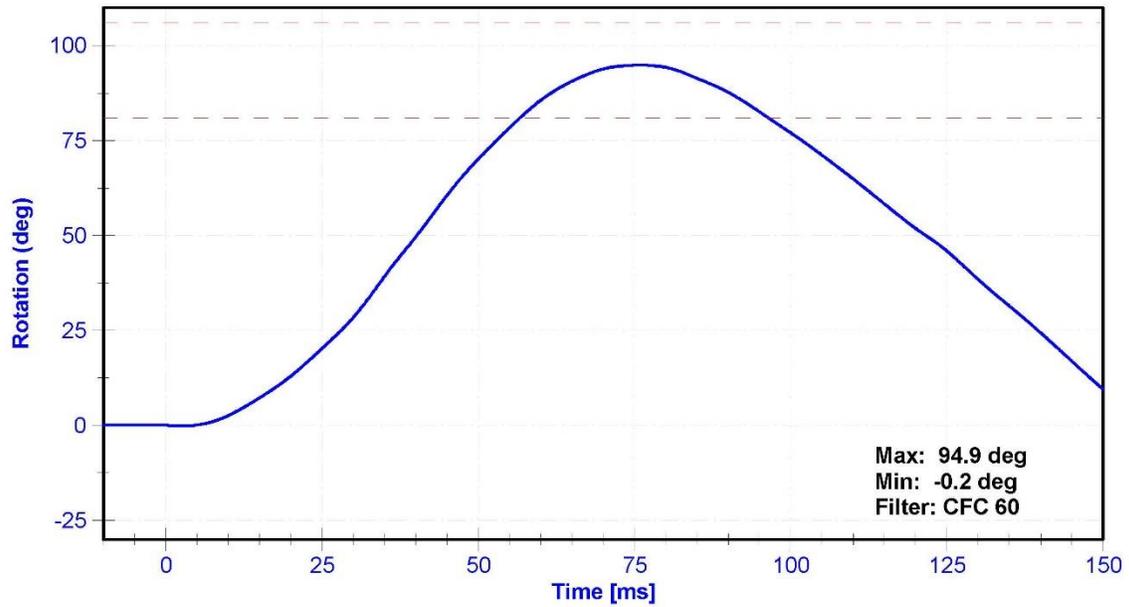

Moment About Occipital Condyle

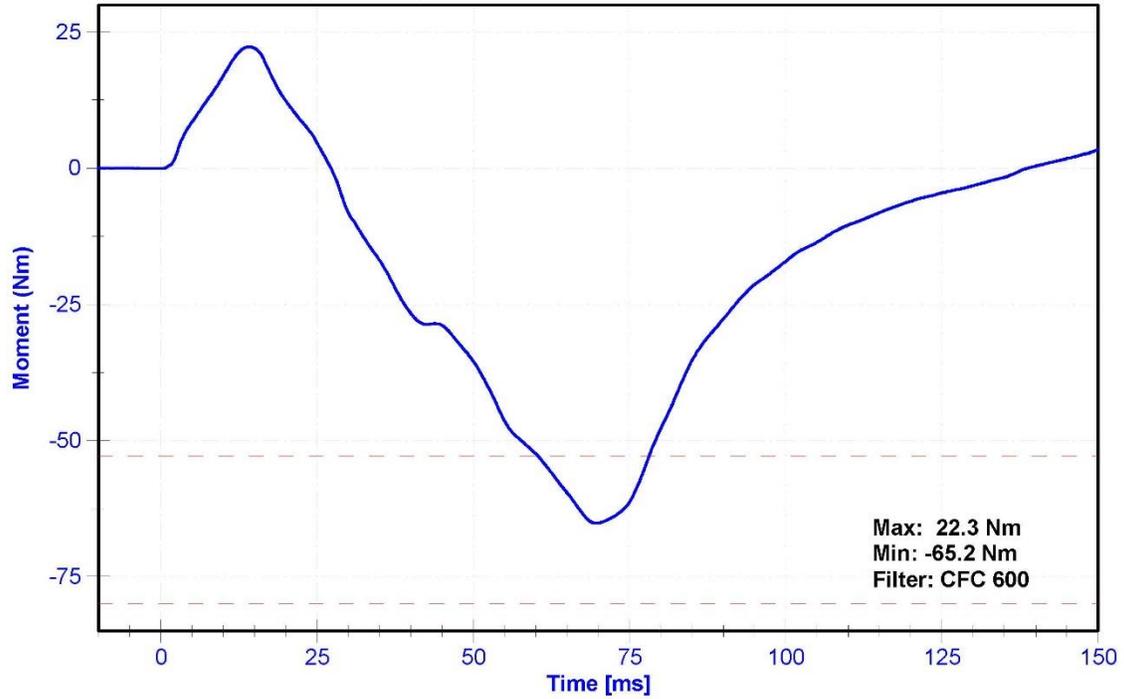

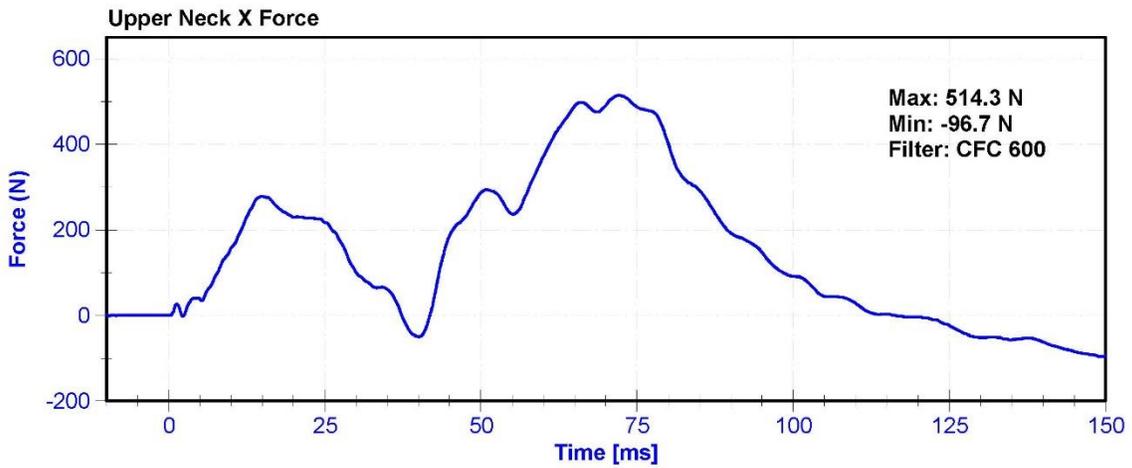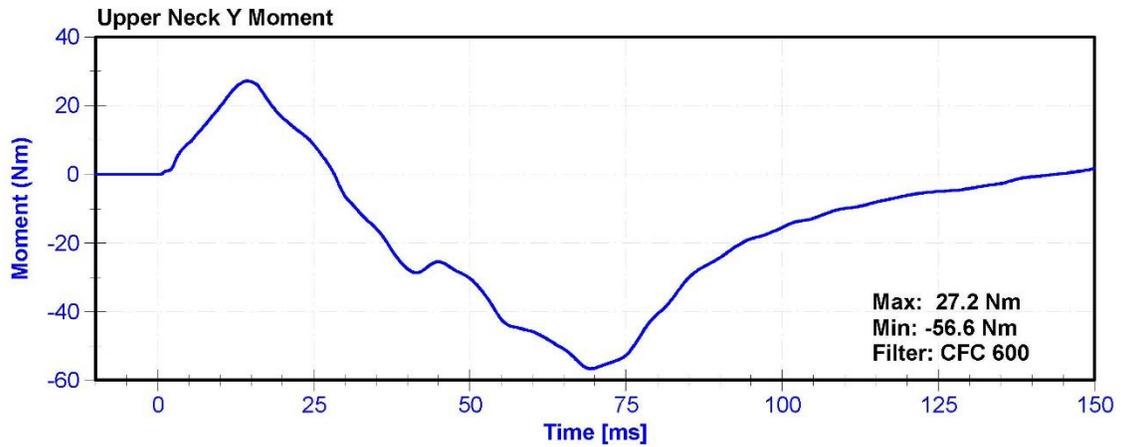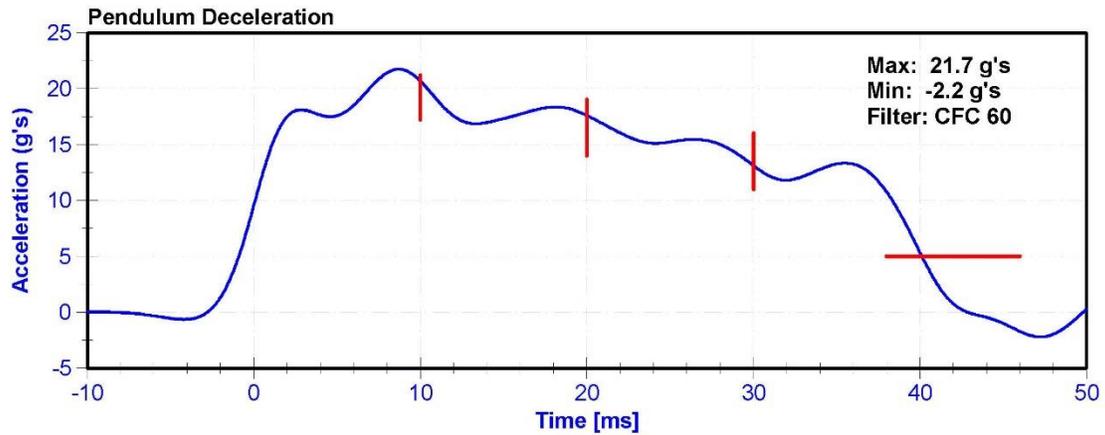


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	1046	Laboratory Supervisor	M.Goehle



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.1	Pass
Humidity	10	70	%	49.8	Pass
Velocity	6.59	6.83	m/s	6.655	Pass
Chest Displacement	-72.6	-63.5	mm	-67.78	Pass
Resistive Force	5160	5894	N	5673.2	Pass
Hysteresis	65	85	%	71.5	Pass


Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P16593	4/1/2016	4/1/2017
Chest Potentiometer	Servo 14CB1-2897	DS-1046	9/19/2016	9/19/2017

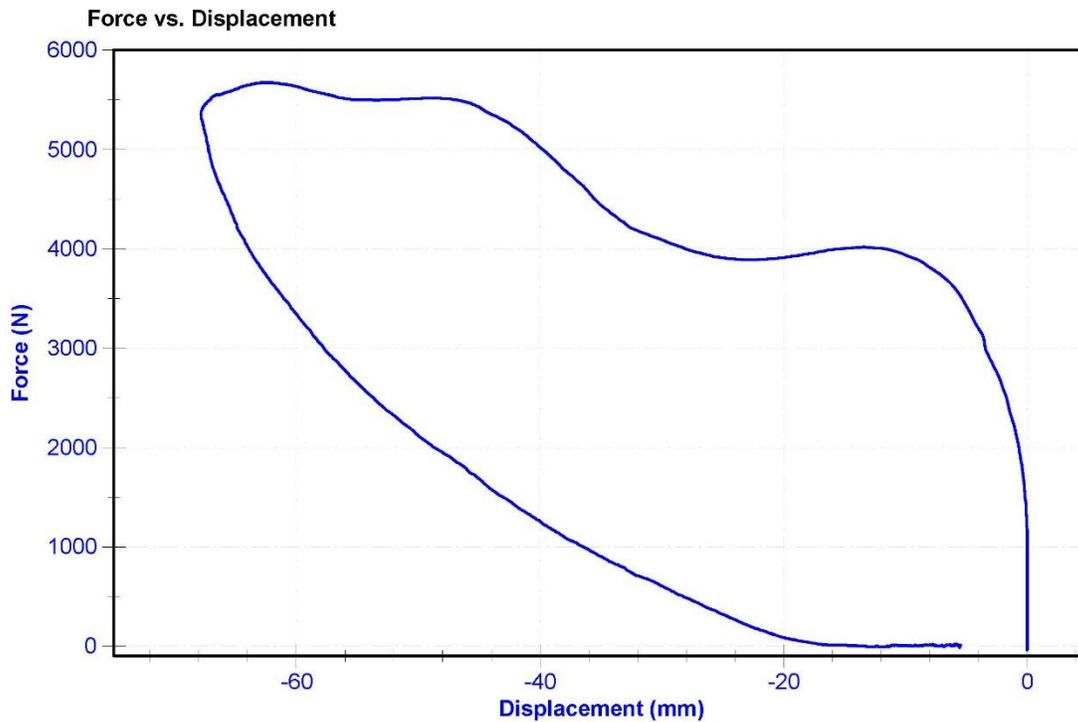


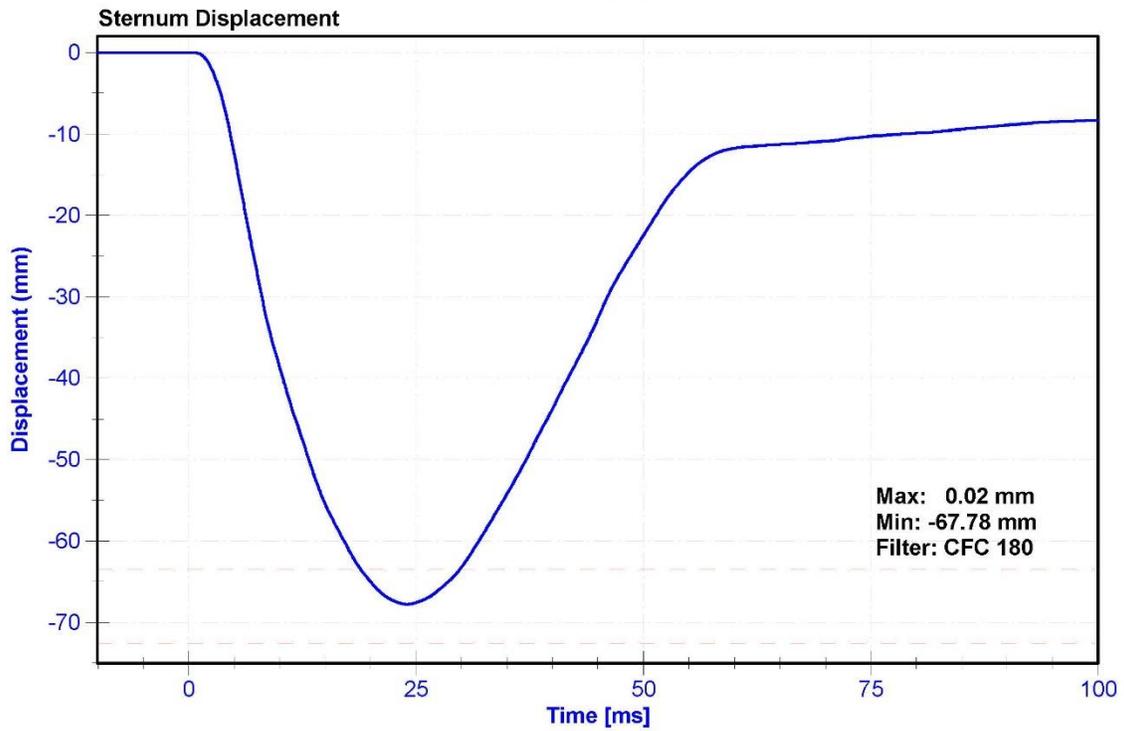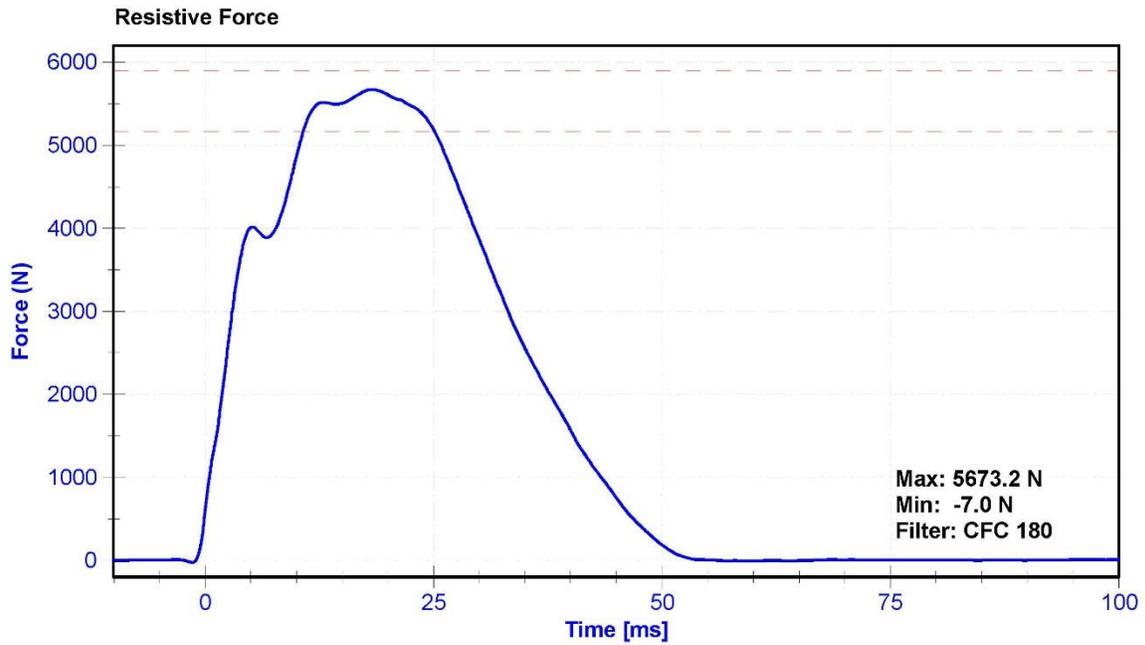

Probe Acceleration

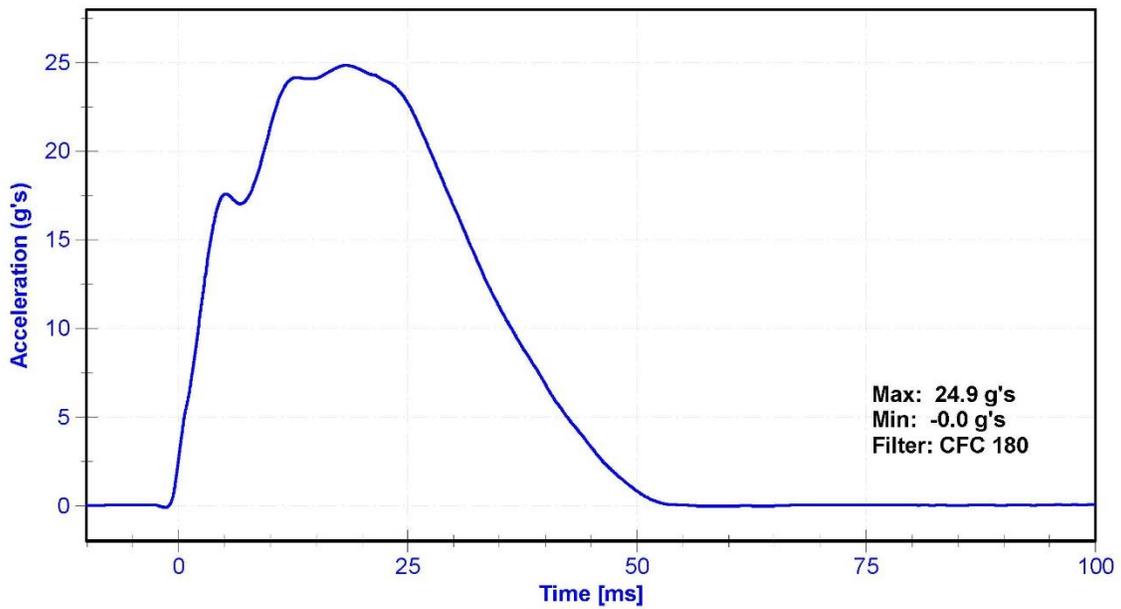

Change in Velocity (Integrated Acceleration)

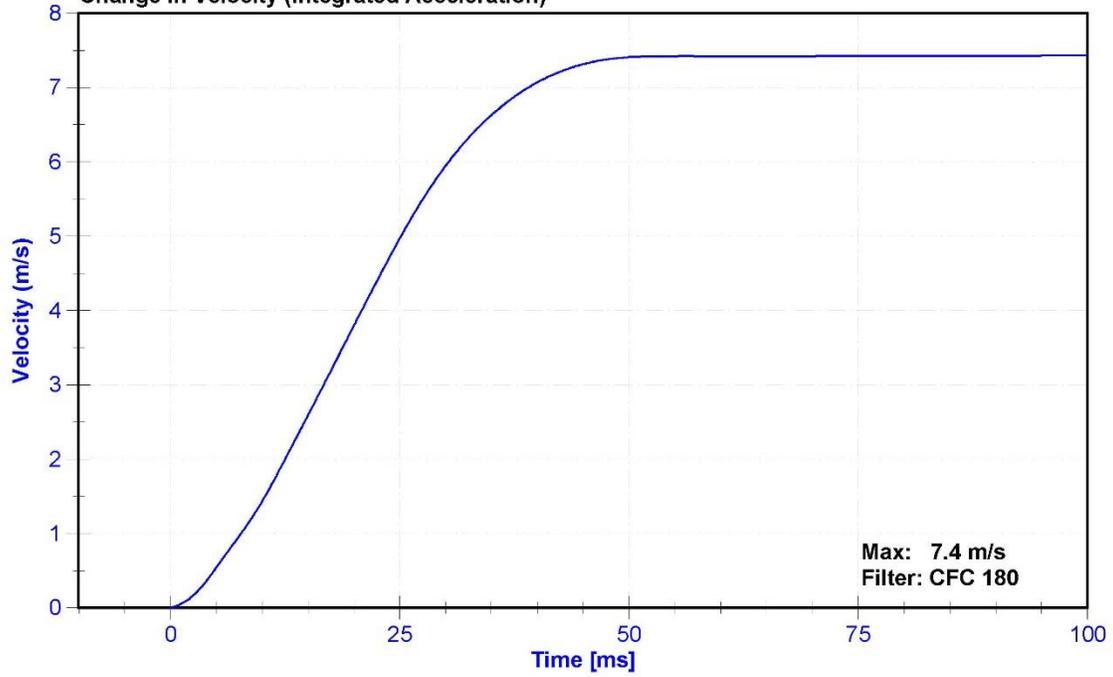


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	1046	Laboratory Supervisor	M.Goehle

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.6	Pass
Humidity	10	70	%	49.1	Pass
Average Velocity	5	10	deg/s	7.4	Pass
Angle at 203Nm	40	50	deg	43.8	Pass
Moment at 30 degrees	0	94.9	Nm	84.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	4/4/2016	4/4/2017
Load Cell	Key Trans 2301-02	LC-115 My	10/3/2015	10/2/2016

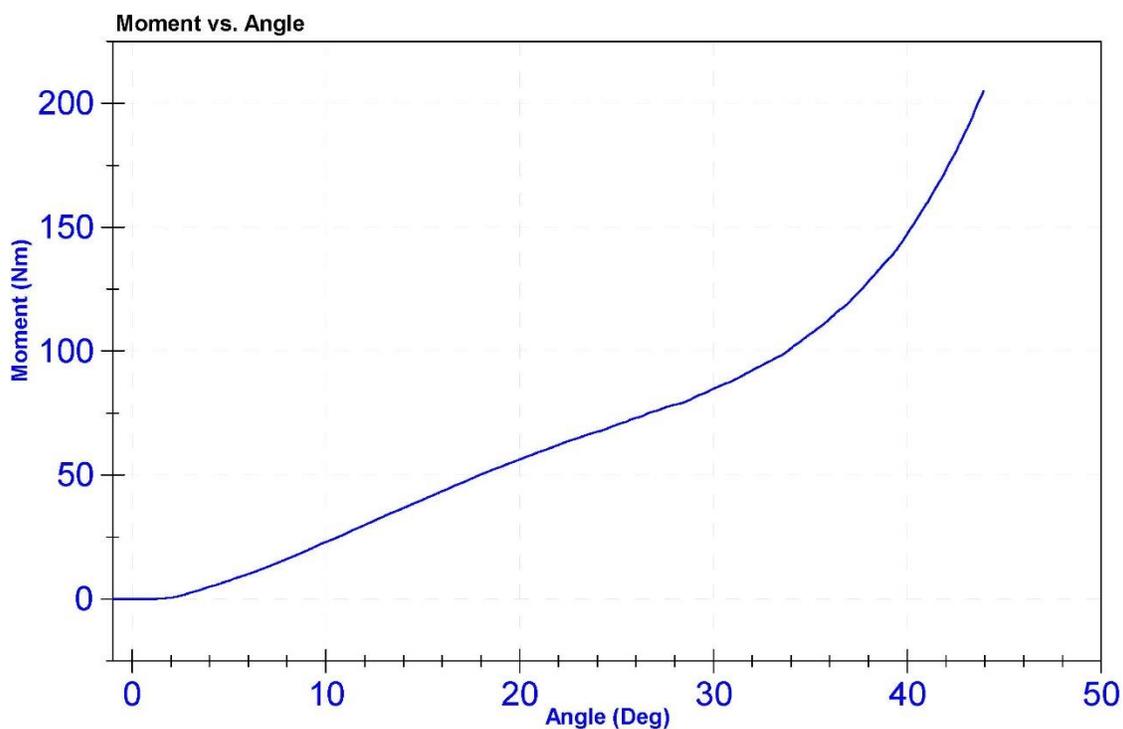


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	1046	Laboratory Supervisor	M.Goehle

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.6	Pass
Humidity	10	70	%	49.1	Pass
Average Velocity	5	10	deg/s	7.3	Pass
Angle at 203Nm	40	50	deg	42.3	Pass
Moment at 30 degrees	0	94.9	Nm	92.2	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	4/4/2016	4/4/2017
Load Cell	Key Trans 2301-02	LC-115 My	10/3/2015	10/2/2016

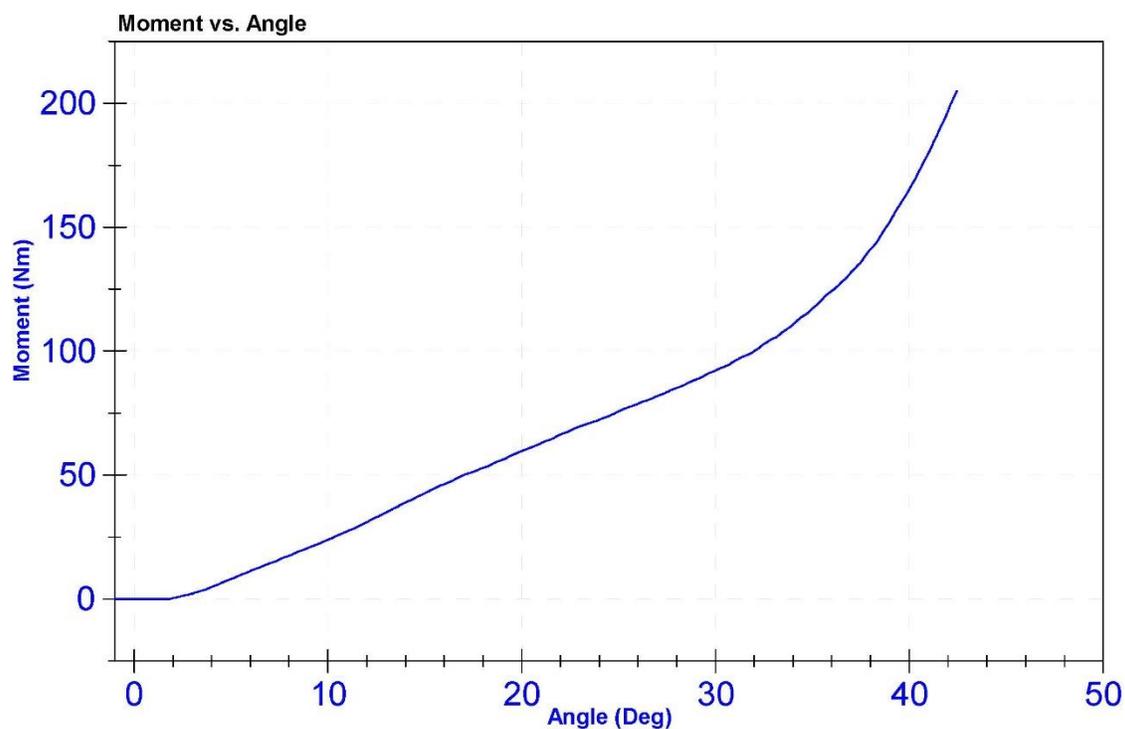


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	1046	Laboratory Supervisor	M. Goehle



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.9	Pass
Humidity	10	70	%	47.4	Pass
Velocity	2.07	2.13	m/s	2.098	Pass
Maximum Resistive Force	4720	5780	N	5507.7	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P16593	4/1/2016	4/1/2017

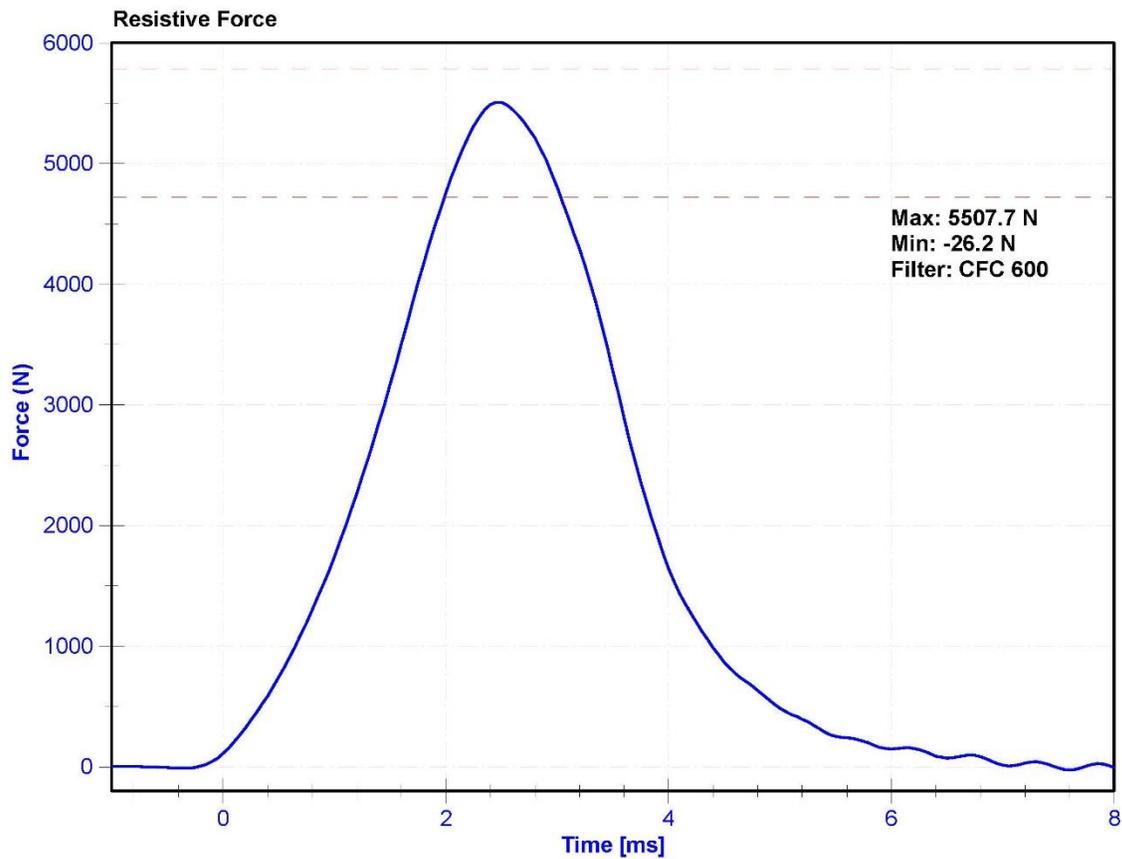

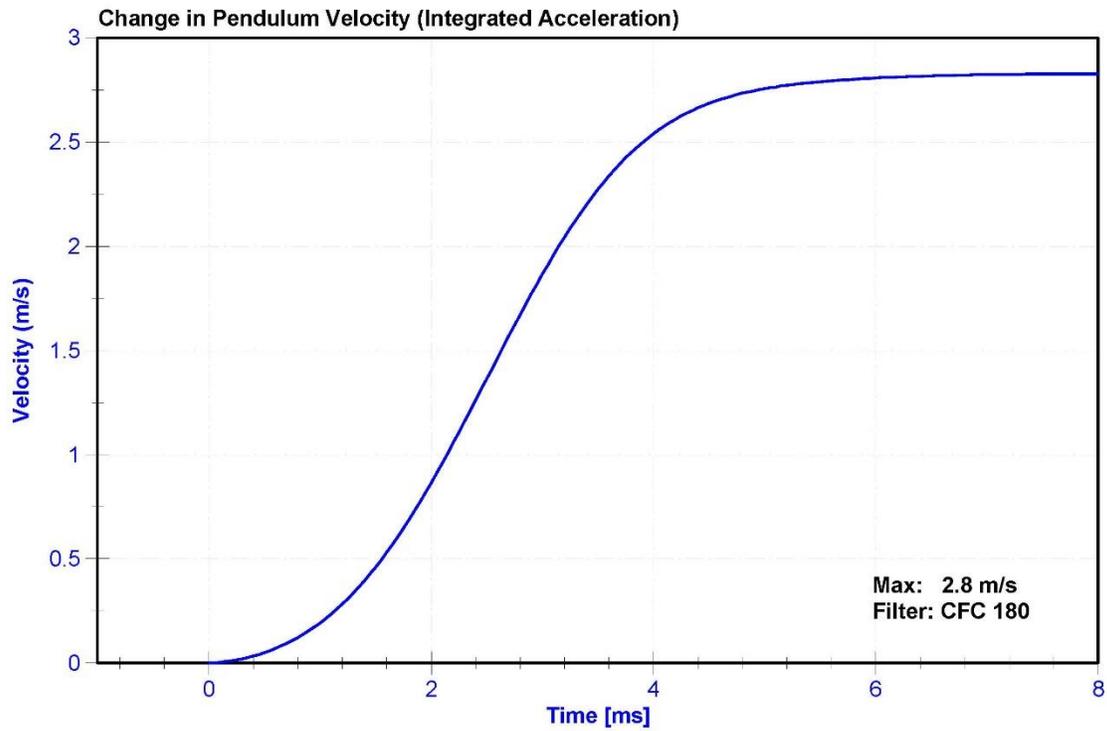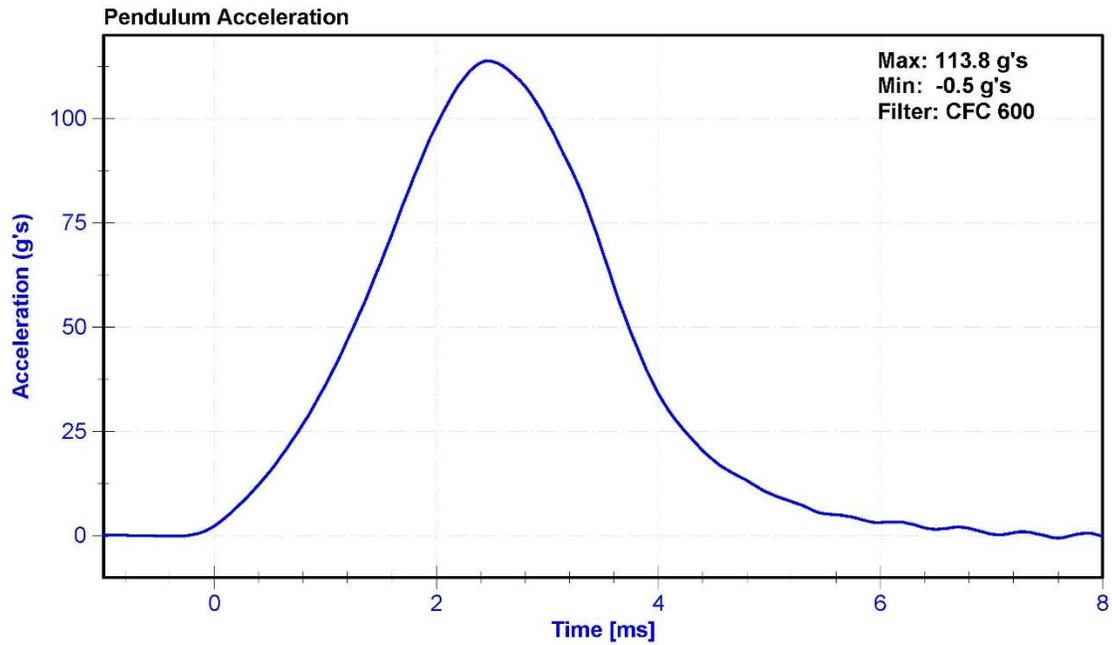


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	1046	Laboratory Supervisor	M. Goehle



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.9	Pass
Humidity	10	70	%	47.4	Pass
Velocity	2.07	2.13	m/s	2.096	Pass
Maximum Resistive Force	4720	5780	N	5133.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P16593	4/1/2016	4/1/2017

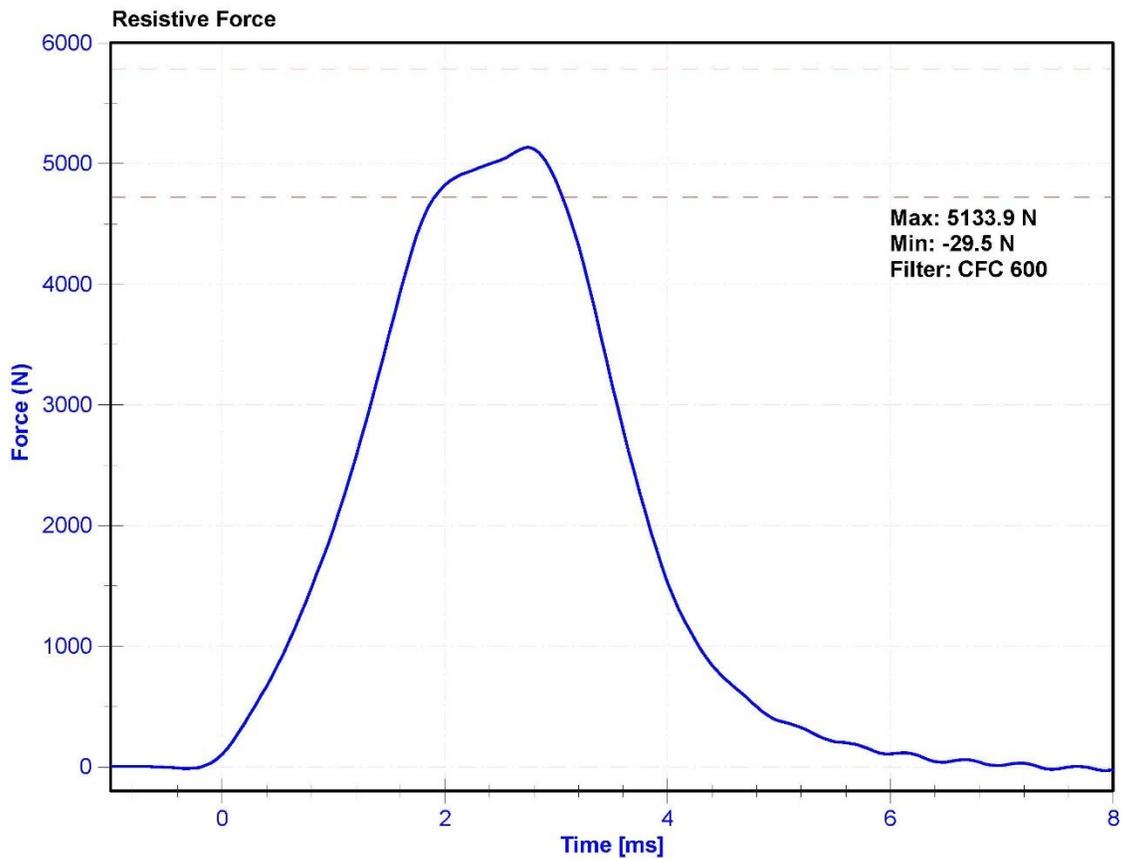

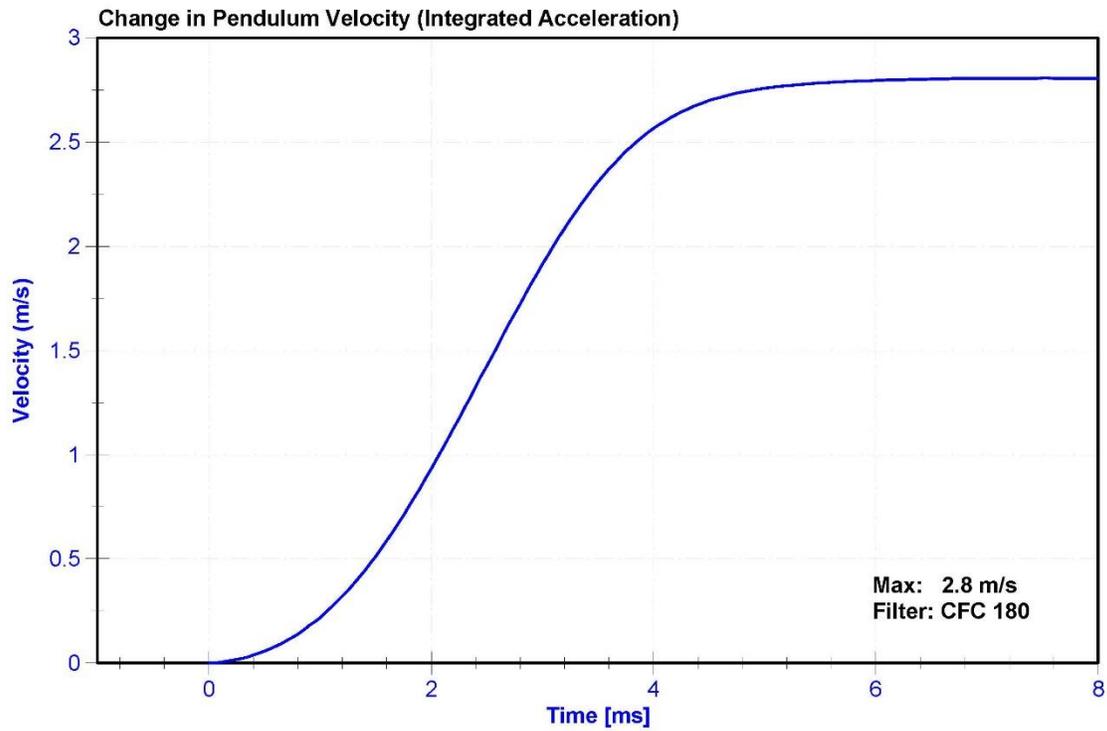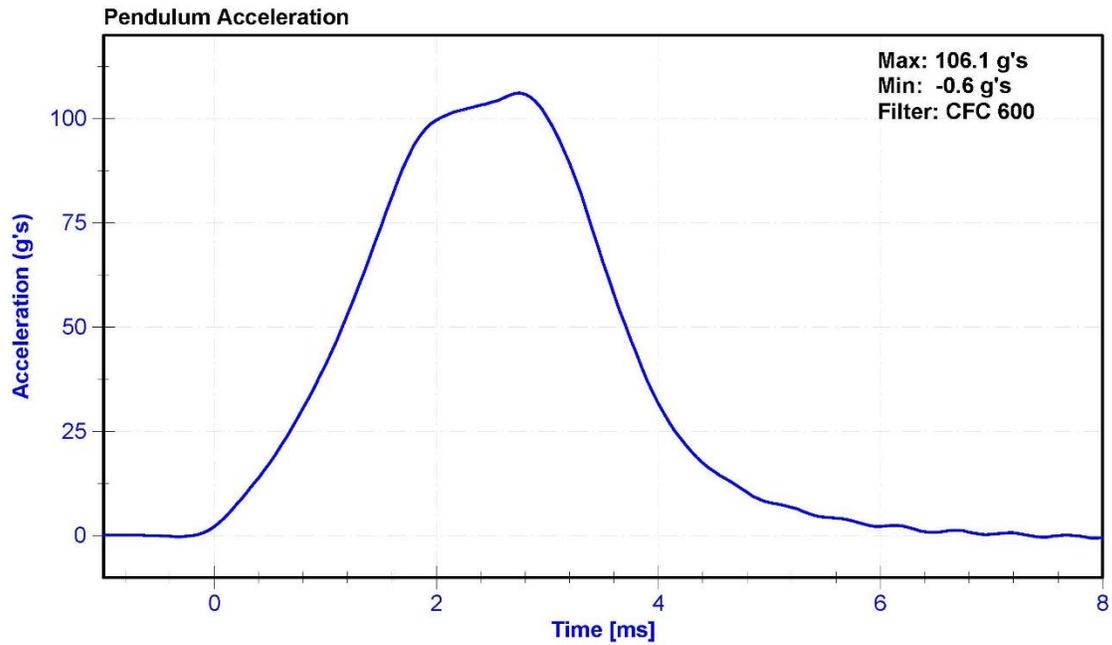

CALIBRATION TEST RESULTS

PRE-TEST

HYBRID III 5TH PERCENTILE - PASSENGER ATD

SERIAL NO: 288




External Measurements - Hybrid 3 - 5th Female

Technician: Michael Hartung

Date: 10/6/2016

Dummy Serial Number: 288

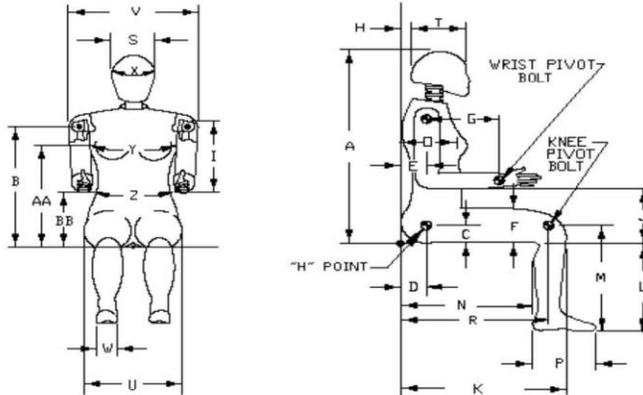

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	775	800	781	Pass
B	Shoulder Pivot Height	432	457	440	Pass
C	H-Point Height	81	86	82	Pass
D	H-Point from Backline	145	150	148	Pass
E	Shoulder Pivot from Backline	69	84	76	Pass
F	Thigh Clearance	119	135	126	Pass
G	Back of Elbow to Wrist Pivot	244	259	250	Pass
H	Head Back to Backline	43	48	47	Pass
I	Shoulder to Elbow Length	277	297	285	Pass
J	Elbow Rest Height	183	203	187	Pass
K	Buttock to Knee Length	521	546	541	Pass
L	Popliteal Height	356	376	366	Pass
M	Knee Pivot Height	394	419	400	Pass
N	Buttock Popliteal Length	414	439	425	Pass
O	Chest Depth without Jacket	175	191	179	Pass
P	Foot Length (right)	219	234	225	Pass
R	Buttock To Knee Pivot Length	457	483	462	Pass
S	Head Breadth	137	147	143	Pass
T	Head Depth	178	188	182	Pass
U	Hip Breadth	300	315	302	Pass
V	Shoulder Breadth	351	366	361	Pass
W	Foot Breadth	79	94	83	Pass
X	Head Circumference	528	549	539	Pass
Y	Chest Circumference with Jacket	851	881	856	Pass
Z	Waist Circumference	460	790	779	Pass
AA	Reference Location (Chest Circumference)	333	358	345	Pass
BB	Reference Location (Waist Circumference)	160	170	165	Pass


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	288	Laboratory Supervisor	M.Goehle




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.8	Pass
Humidity	10	70	%	54	Pass
Resultant Acceleration	250	300	g's	268.9	Pass
Oscillation	0	10	%	2.6	Pass
Lateral Acceleration	-15	15	g's	-4.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264	AC-P80337	10/3/2016	4/3/2017
Y Accelerometer	ENDEVCO 7264CT	AC-P80265	10/3/2016	4/3/2017
Z Accelerometer	ENDEVCO 7264CT	AC-P83418	10/3/2016	4/3/2017

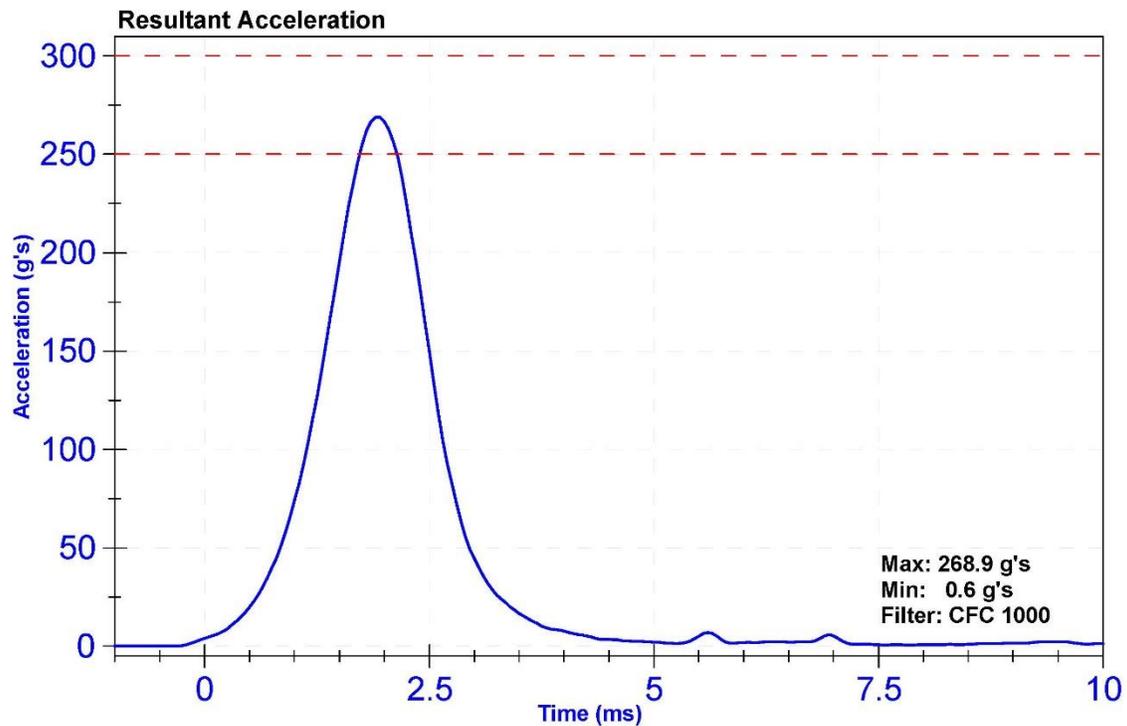

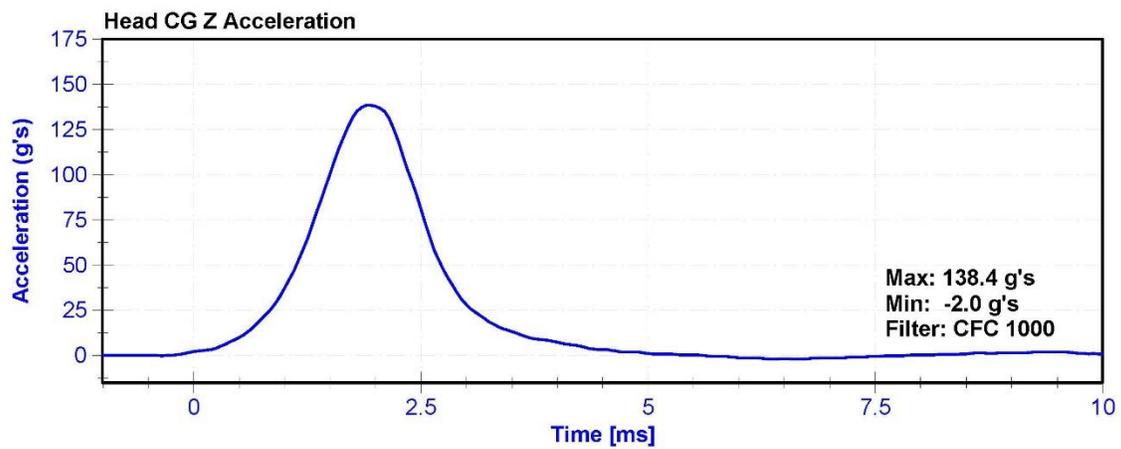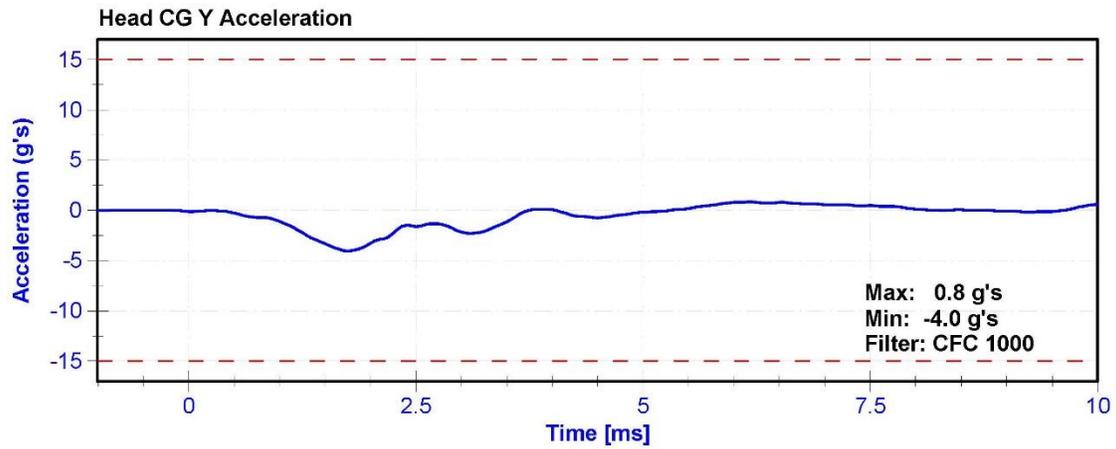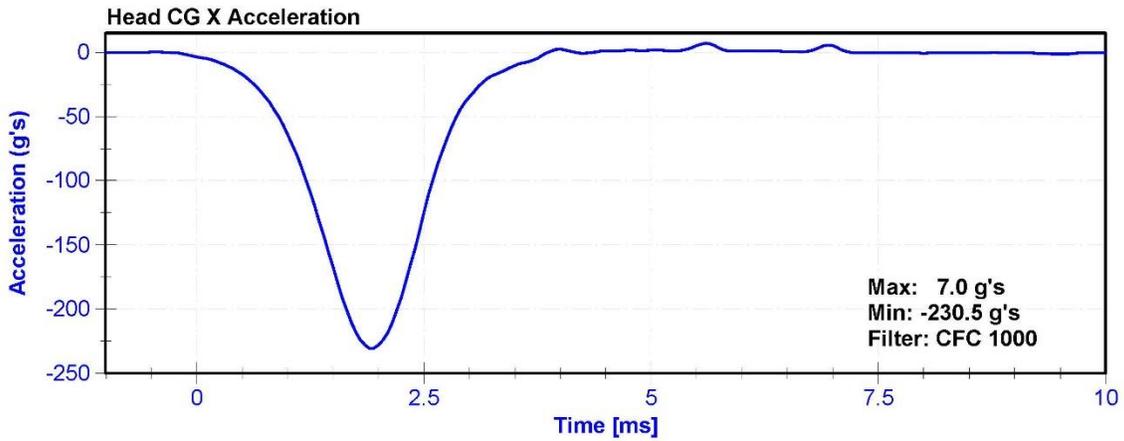


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	288	Laboratory Supervisor	M.Goehle



Results


Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.0	Pass
Humidity	10	70	%	54.5	Pass
Velocity	6.89	7.13	m/s	7.037	Pass
Pendulum Impulse at 10ms	2.1	2.5	m/s	2.26	Pass
Pendulum Impulse at 20ms	4.0	5.0	m/s	4.59	Pass
Pendulum Impulse at 30ms	5.8	7.0	m/s	6.70	Pass
Max D Plane Rotation	77	91	deg	79.0	Pass
Max Moment During Rotation Interval	69	83	Nm	71.1	Pass
Moment Decay to 10.0 Nm	80	100	ms	88.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5F3	5/10/2016	5/10/2017
Pendulum Potentiometer	ETI SP22G	DS-PendPot	10/3/2016	10/3/2017
Condyle Potentiometer	ETI SP22G	DS-CondPot	10/3/2016	10/3/2017
Upper Neck Load Cell	DENTON 1716A	LC-2206Fx	5/24/2016	5/24/2017

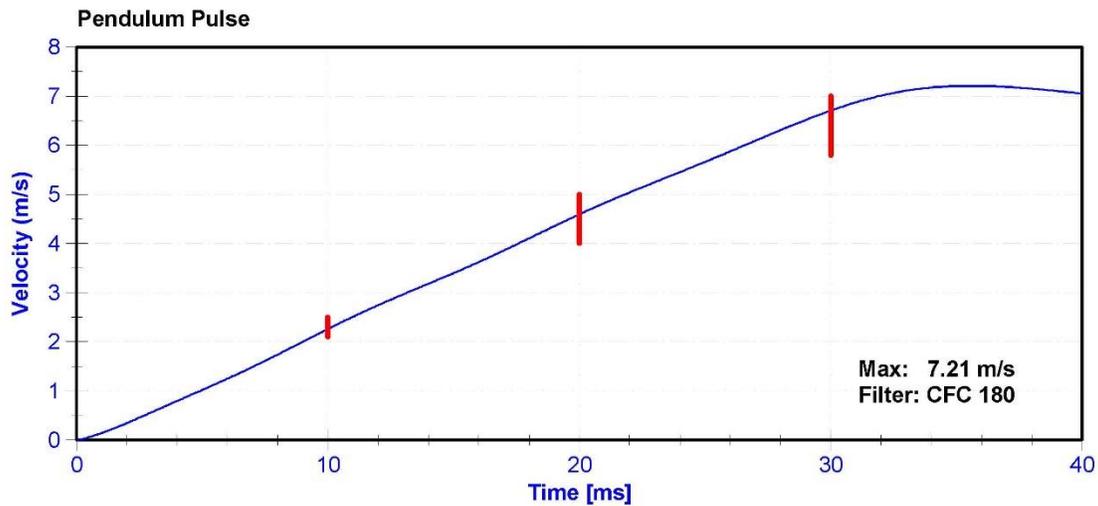

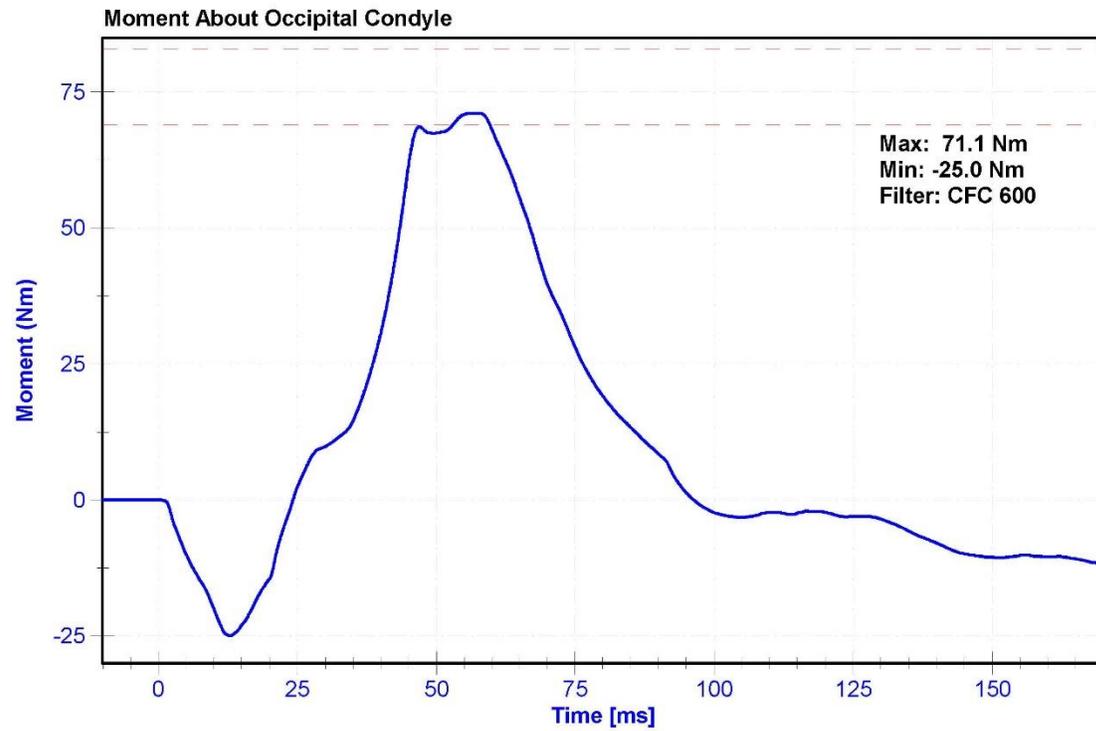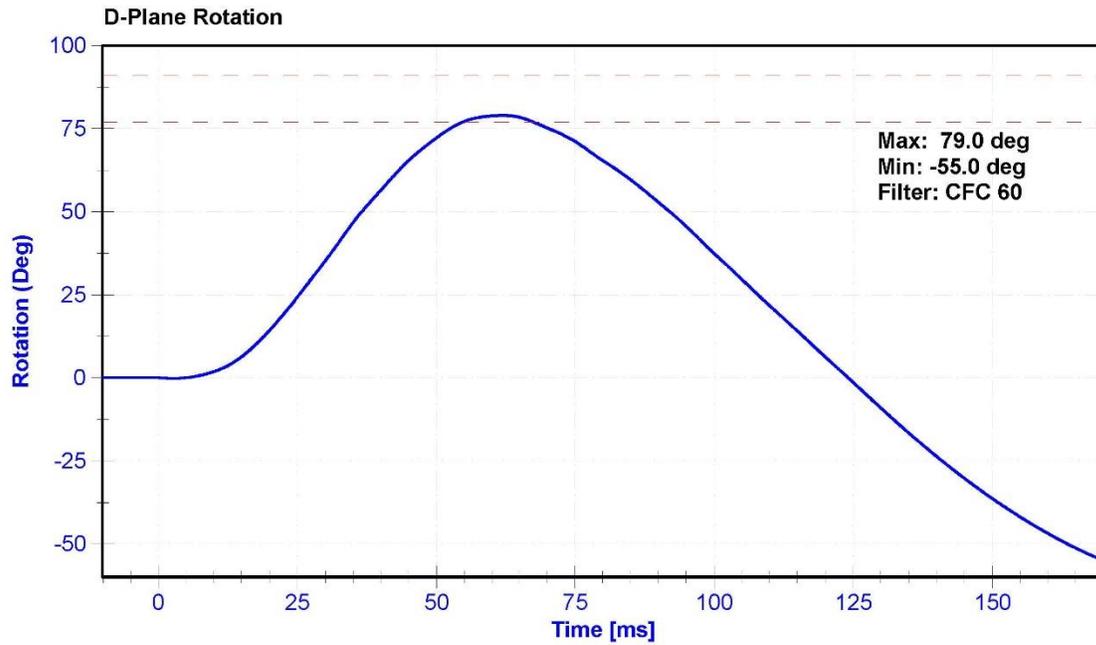

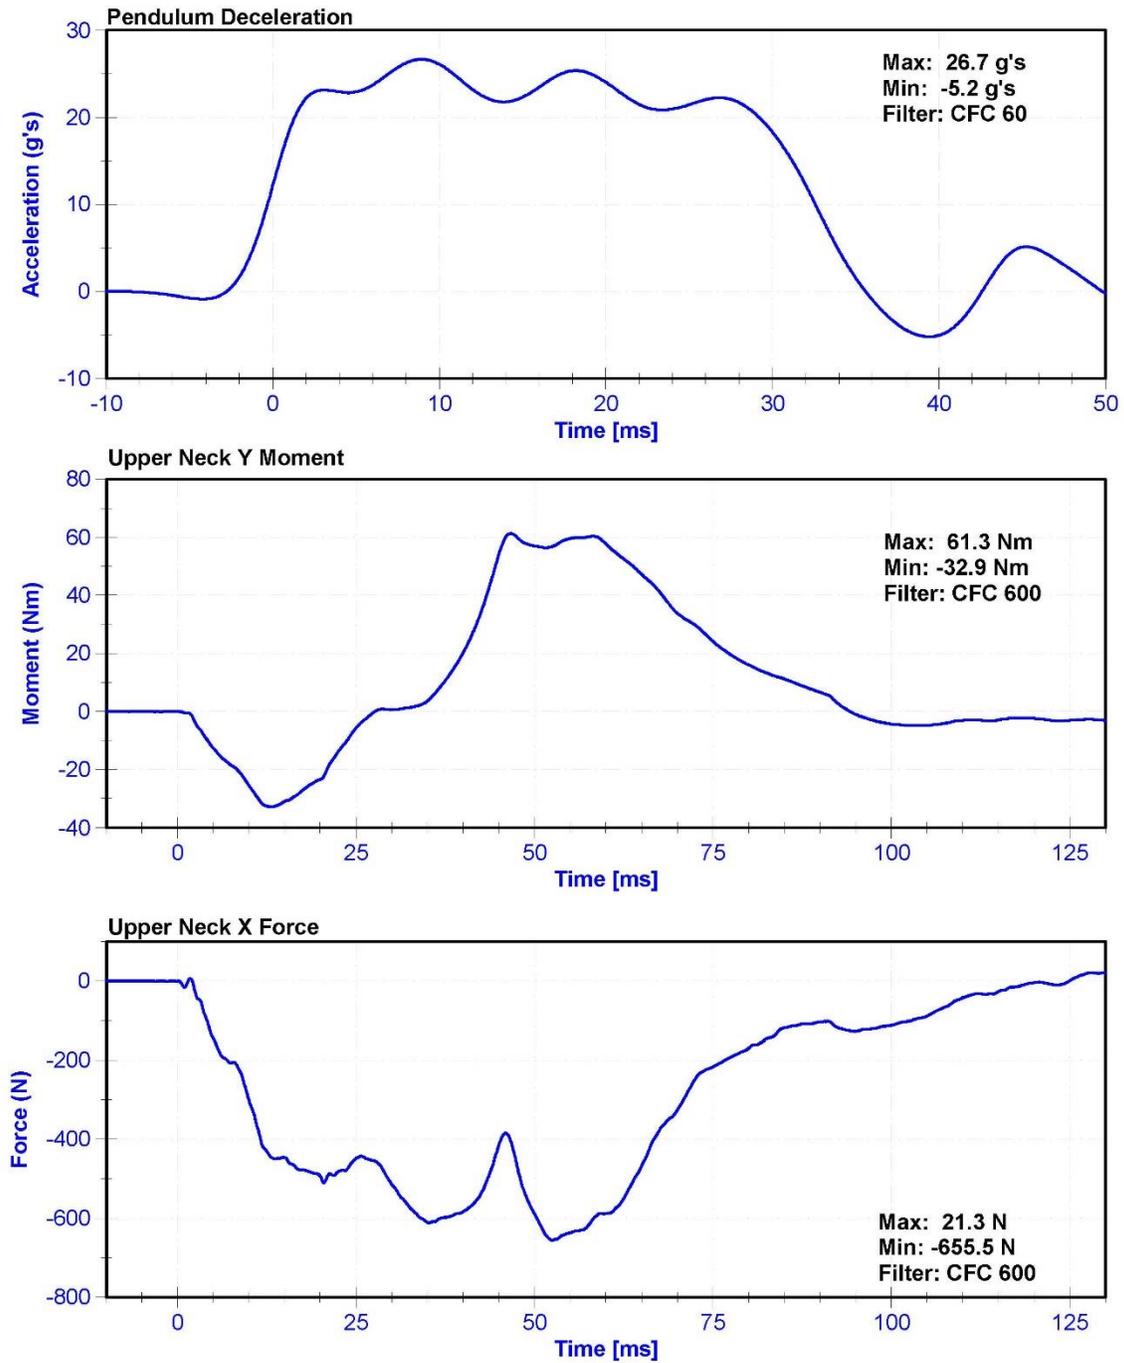


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	288	Laboratory Supervisor	M.Goehle



Results




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.0	Pass
Humidity	10	70	%	47.0	Pass
Velocity	5.95	6.19	m/s	6.068	Pass
Pendulum Impulse at 10ms	1.5	1.9	m/s	1.65	Pass
Pendulum Impulse at 20ms	3.1	3.9	m/s	3.47	Pass
Pendulum Impulse at 30ms	4.6	5.6	m/s	5.28	Pass
D Plane Rotation	99	114	deg	105.5	Pass
Moment During Rotation Interval	-65	-53	Nm	-59.6	Pass
Moment Decay to -10Nm	94	114	ms	102.8	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5F3	5/10/2016	5/10/2017
Pendulum Potentiometer	ETI SP22G	DS-PendPot	10/3/2016	10/3/2017
Condyle Potentiometer	ETI SP22G	DS-CondPot	10/3/2016	10/3/2017
Upper Neck Load Cell	DENTON 1716A	LC-2206Fx	5/24/2016	5/24/2017

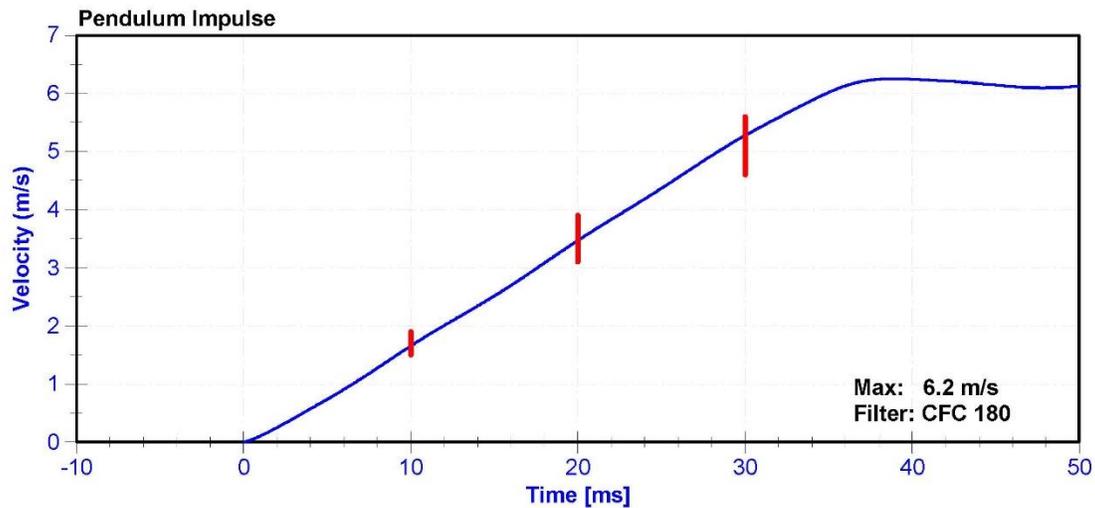

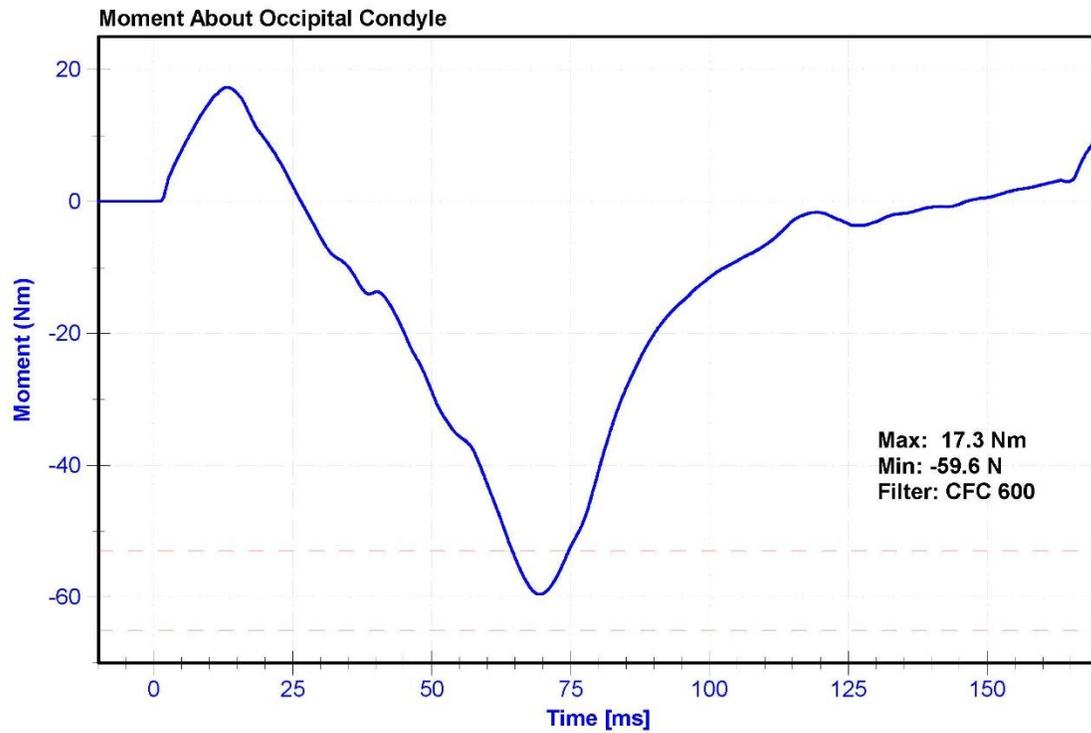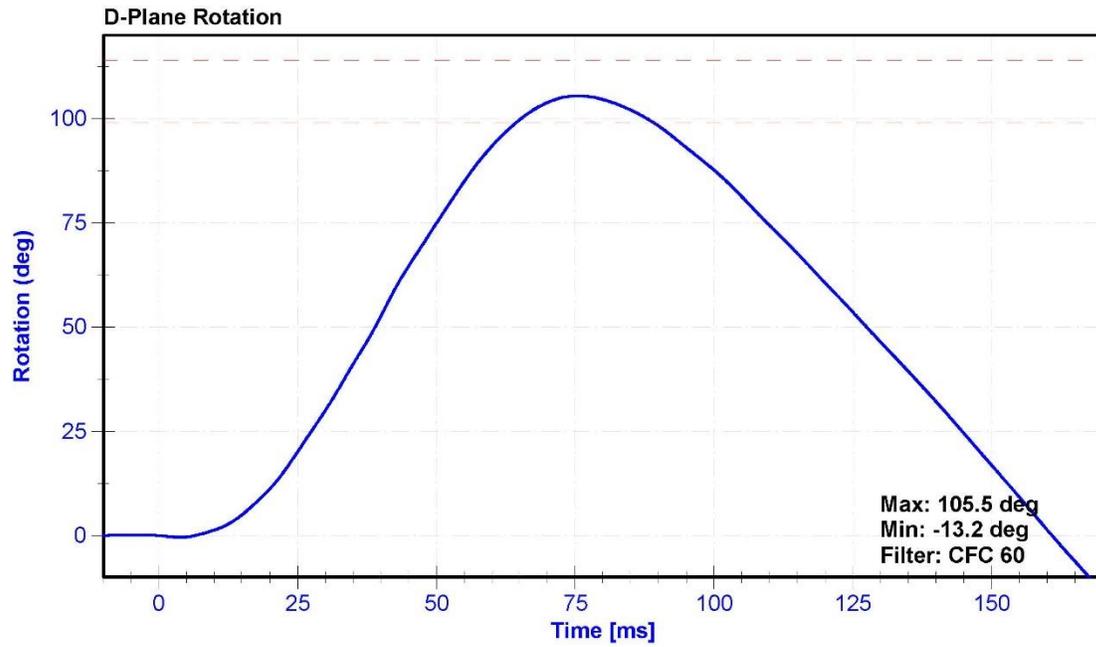

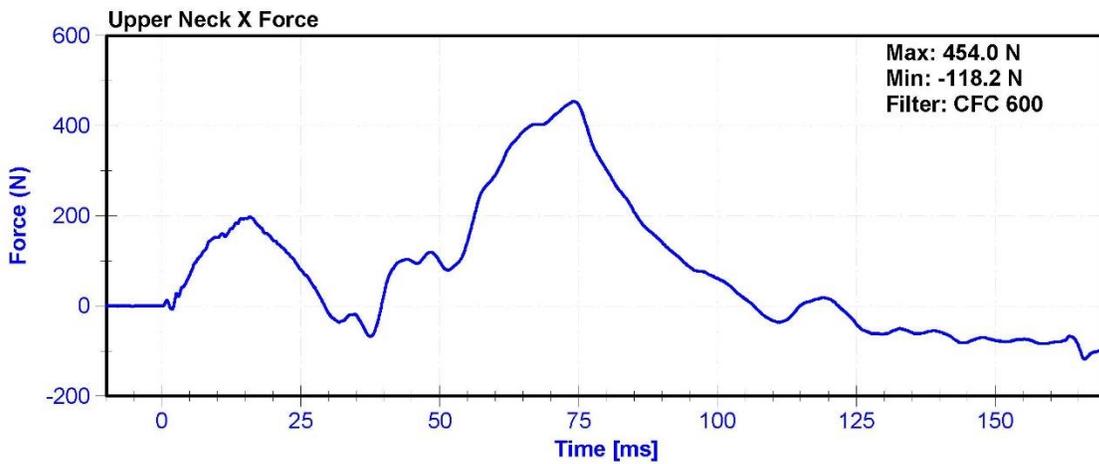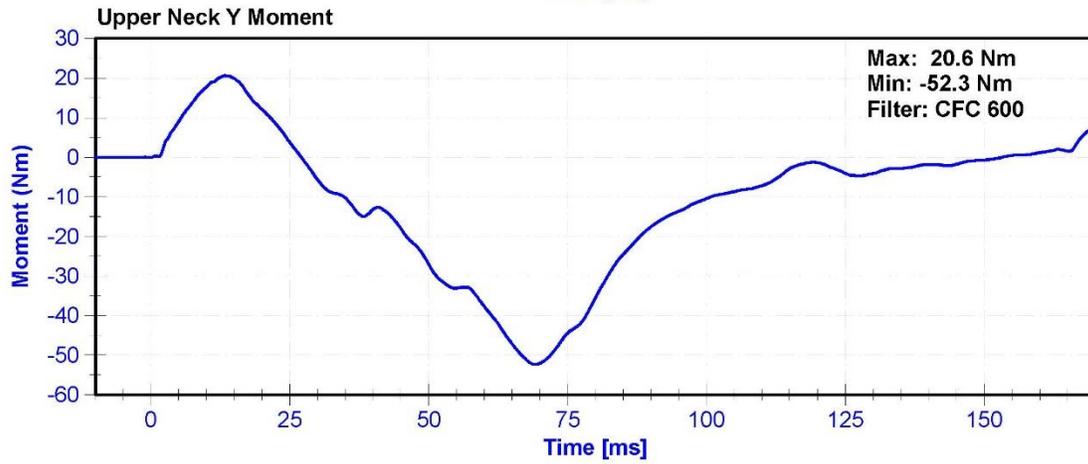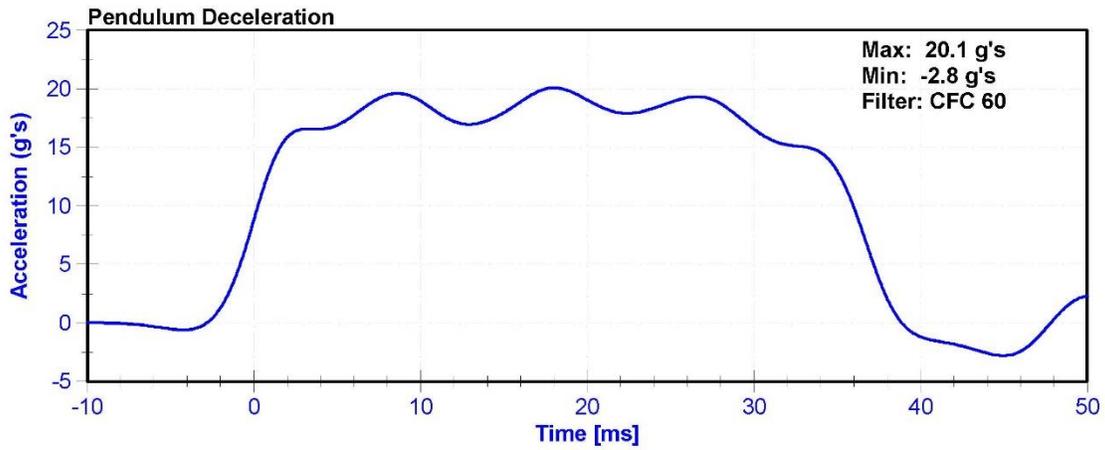


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	288	Laboratory Supervisor	M.Goehle



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.9	Pass
Humidity	10	70	%	46.9	Pass
Velocity	6.59	6.83	m/s	6.655	Pass
Chest Deflection	-58	-50	mm	-52.2	Pass
Maximum Resistive Force (50 to 58mm)	3900	4400	N	4385.7	Pass
Maximum Resistive Force (18 to 50mm)	0	4600	N	4385.7	Pass
Hysteresis	69	85	%	70.3	Pass


Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P16593	4/1/2016	4/1/2017
Chest Potentiometer	SERVO 14CB1-2897	DS-288	9/30/2016	9/30/2017

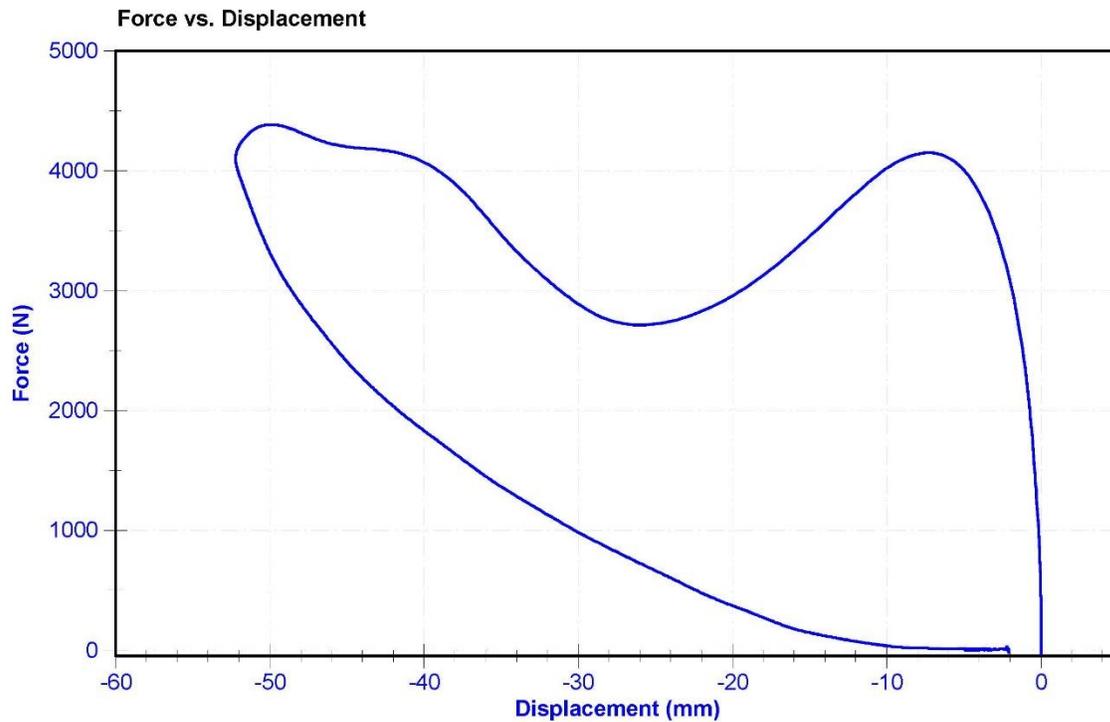


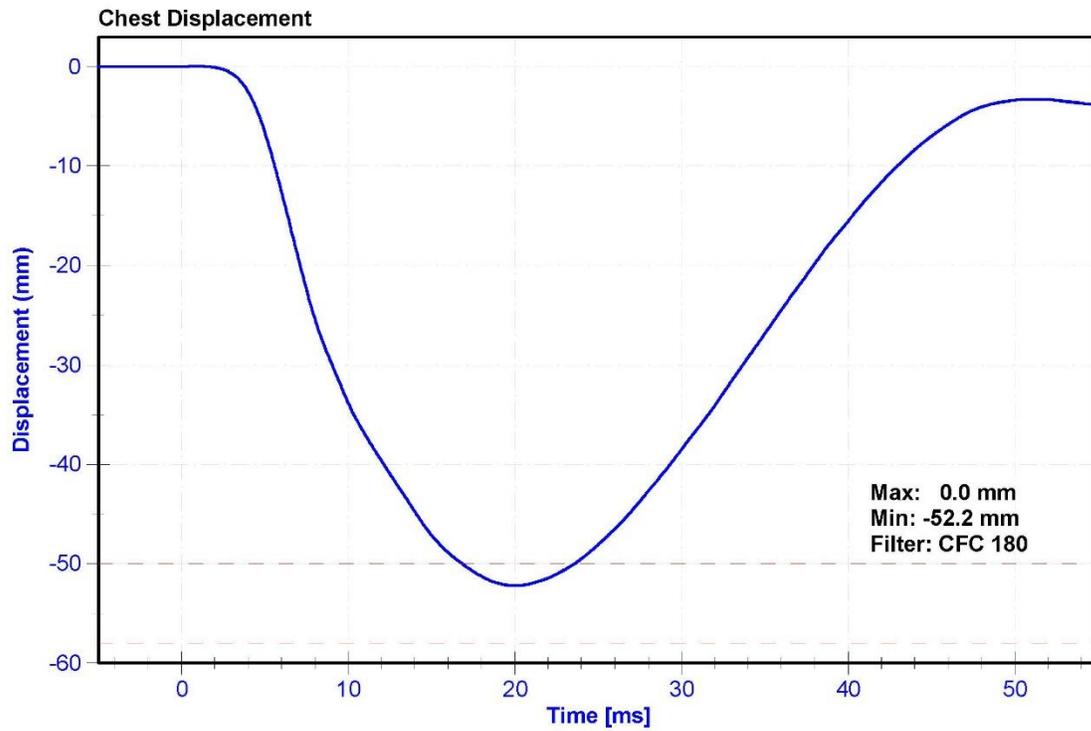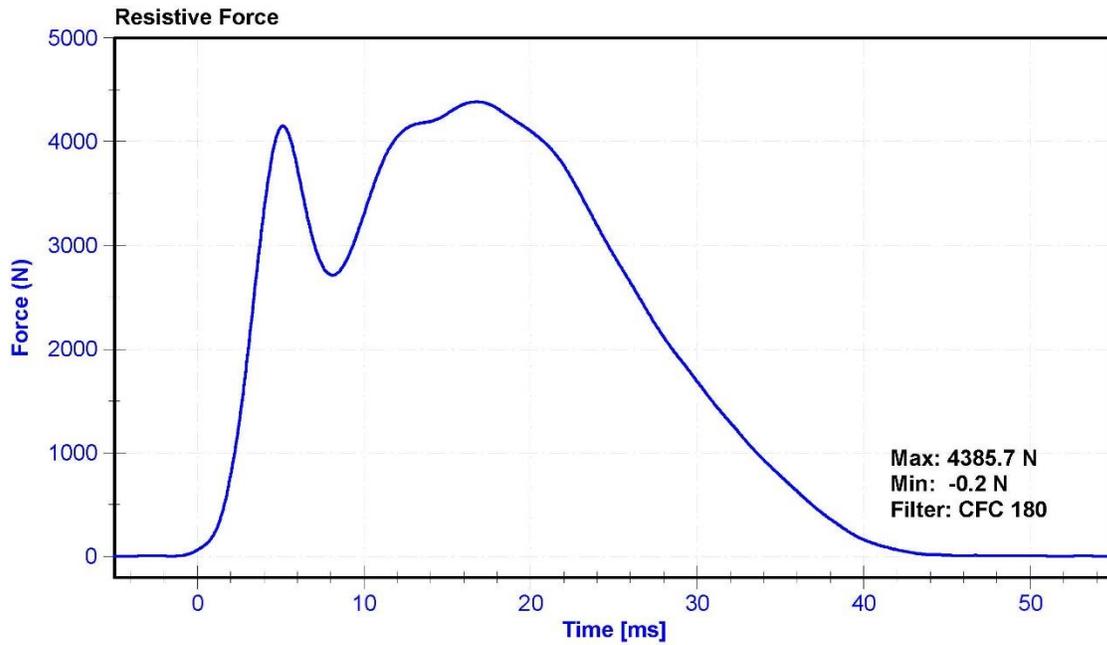

Probe Acceleration

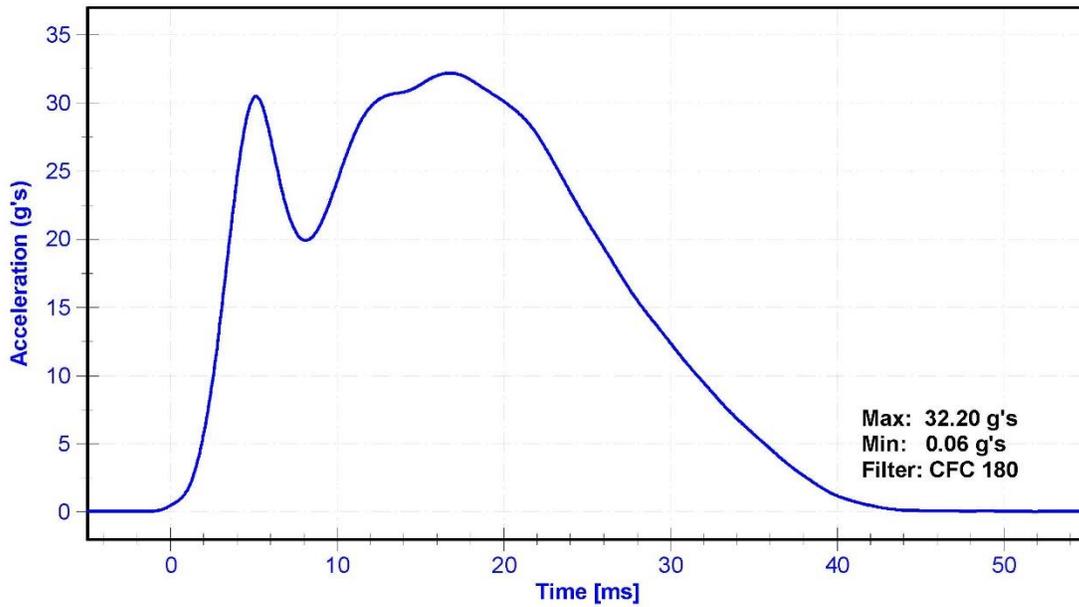

Change in Velocity (Integrated Acceleration)

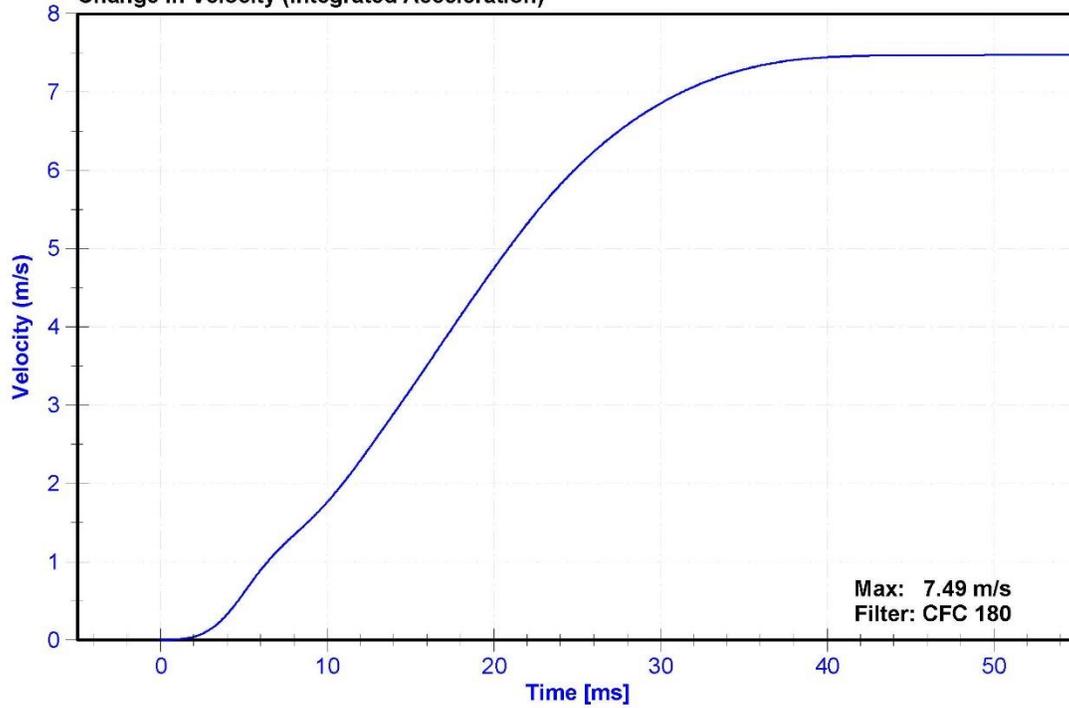


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	288	Laboratory Supervisor	M.Goehle

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.6	25.6	°C	21.4	Pass
Humidity	10	70	%	47	Pass
Initial Angle	0	20	deg	15.8	Pass
Force at 45 Degrees	320	390	N	365.9	Pass
Return Angle Relative to Initial	0	8	deg	7.6	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	Rieker N4C-1	DS-13051548	9/7/2016	9/7/2017
Load Cell	Interface SML-200	LC-493319	9/7/2016	9/7/2017

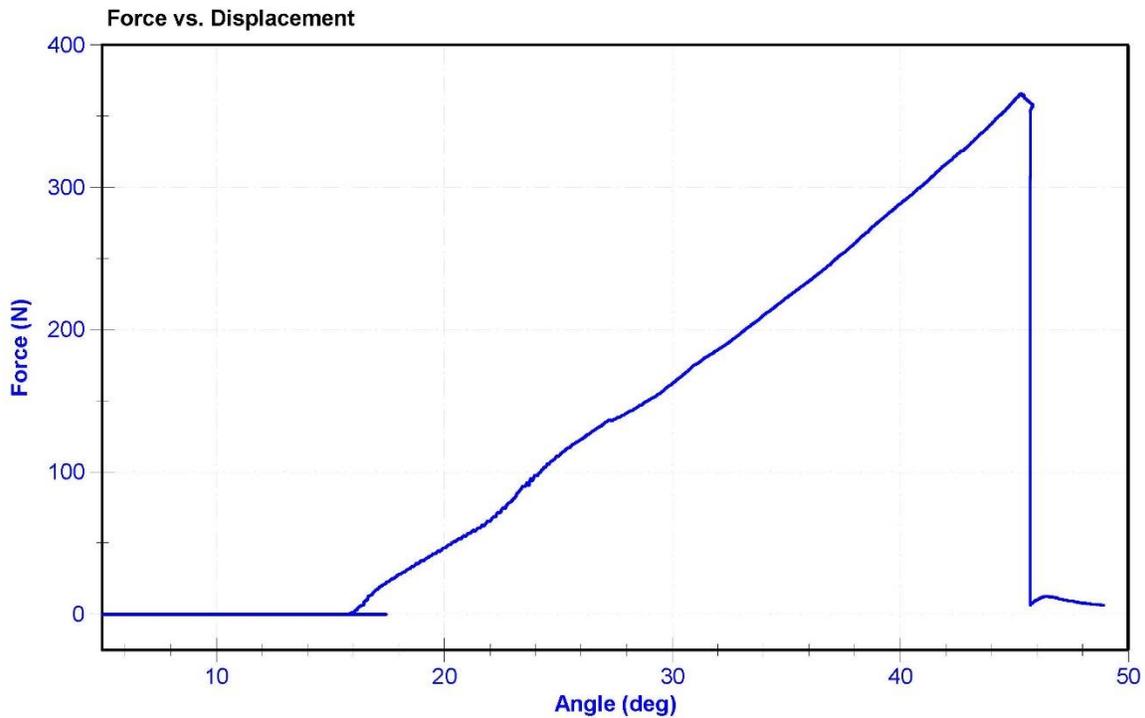


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	288	Laboratory Supervisor	M.Goehle



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.8	Pass
Humidity	10	70	%	33.4	Pass
Velocity	2.07	2.13	m/s	2.102	Pass
Resistive Force	3450	4060	N	3734.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P16593	4/1/2016	4/1/2017

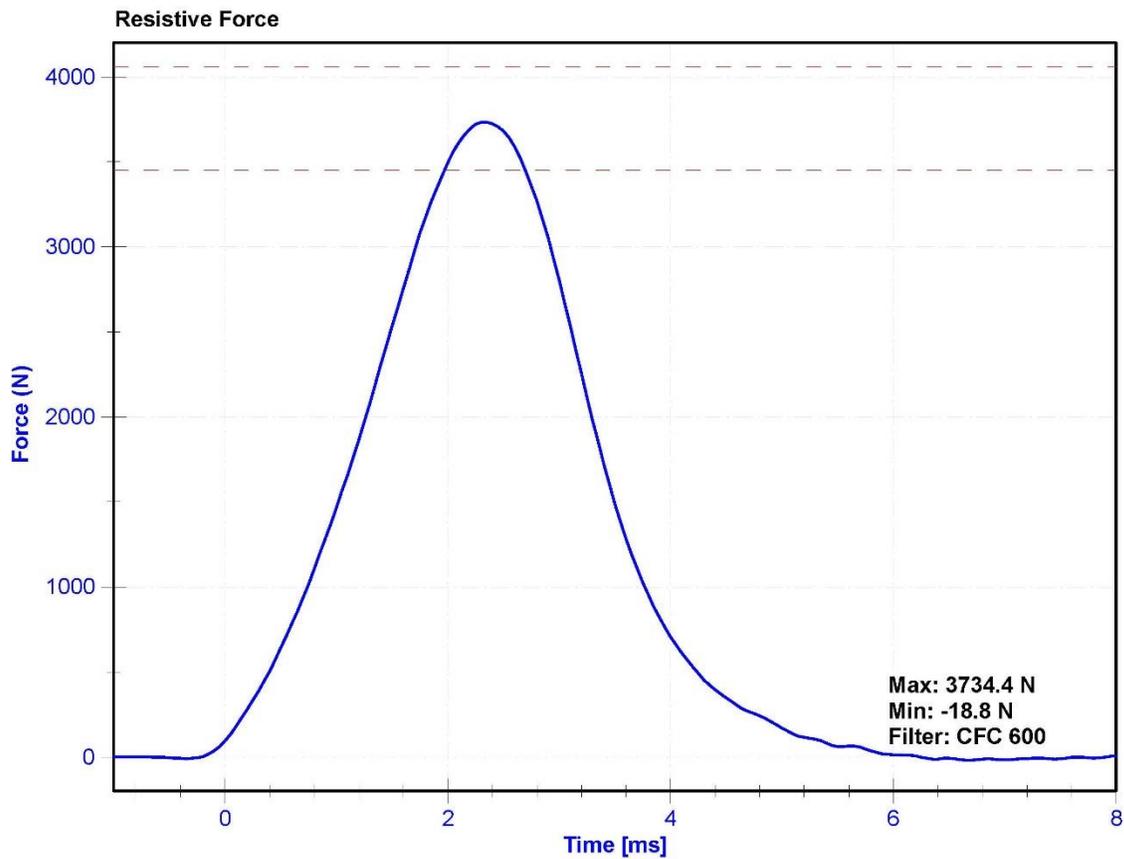

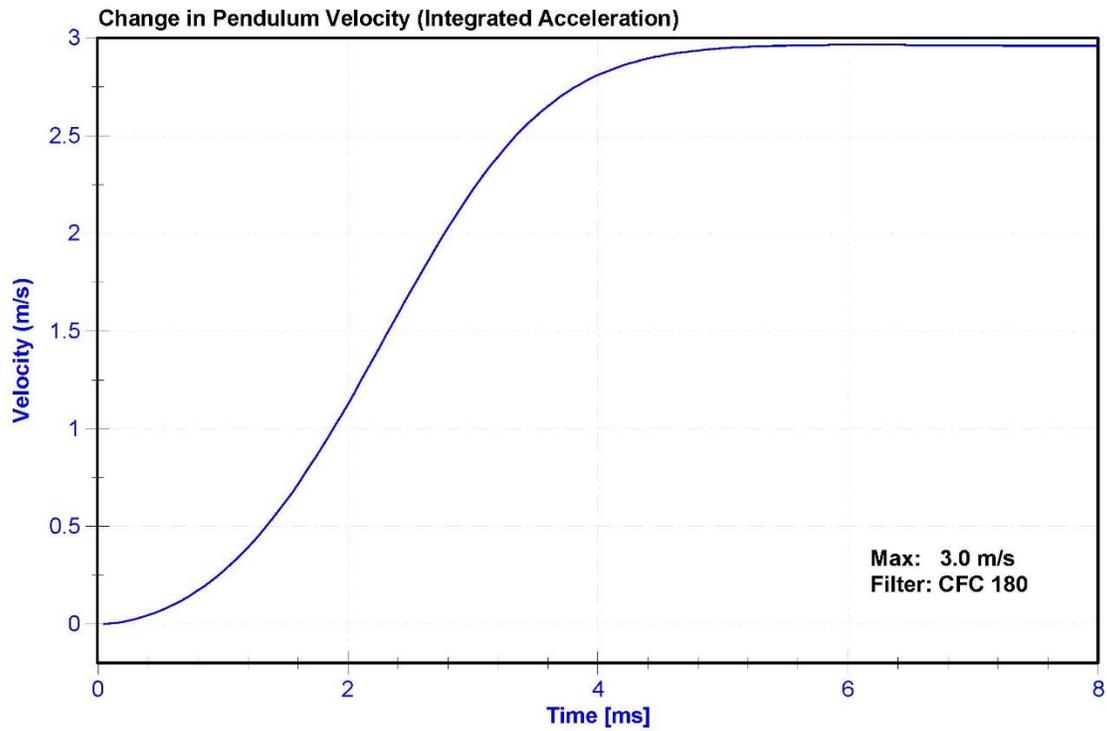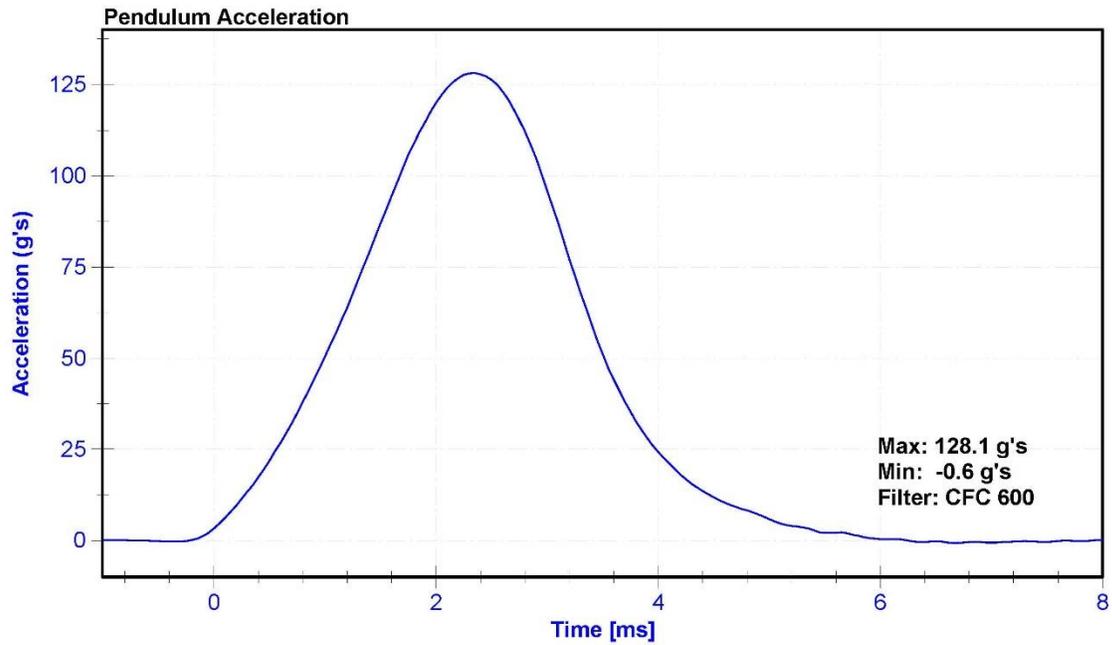


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	288	Laboratory Supervisor	M.Goehle



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.8	Pass
Humidity	10	70	%	33.4	Pass
Velocity	2.07	2.13	m/s	2.101	Pass
Resistive Force	3450	4060	N	3825.8	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P16593	4/1/2016	4/1/2017

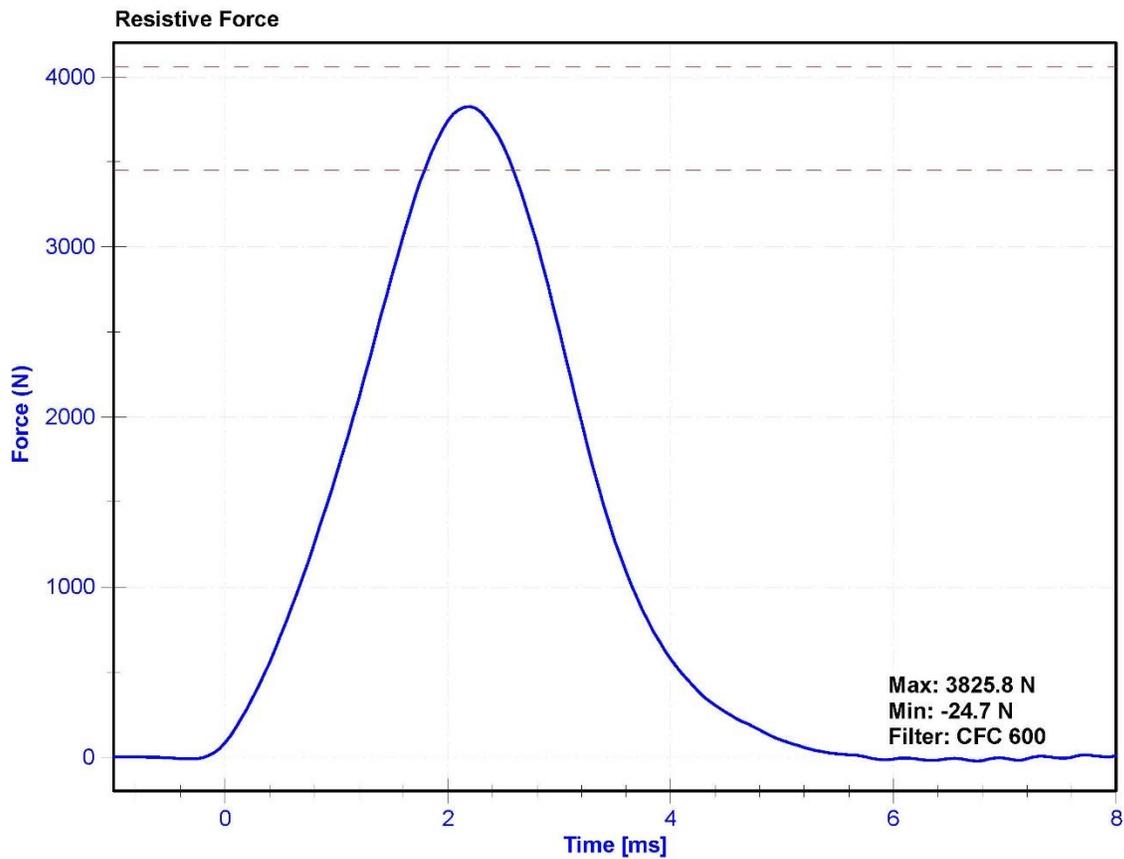

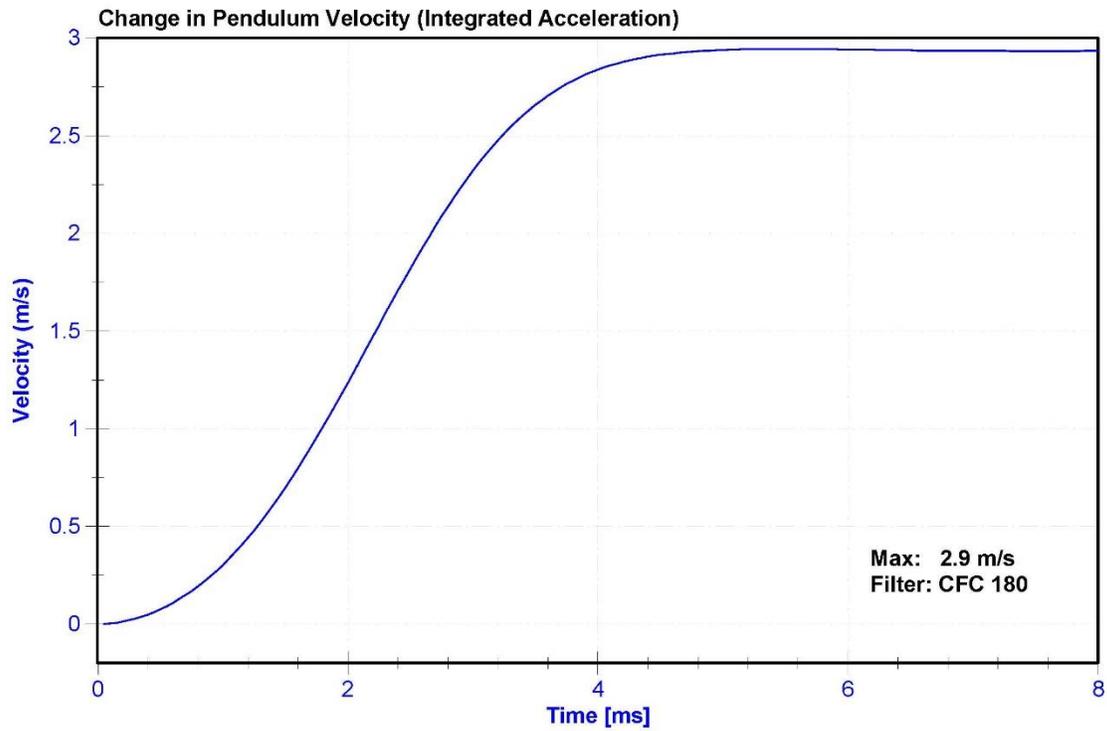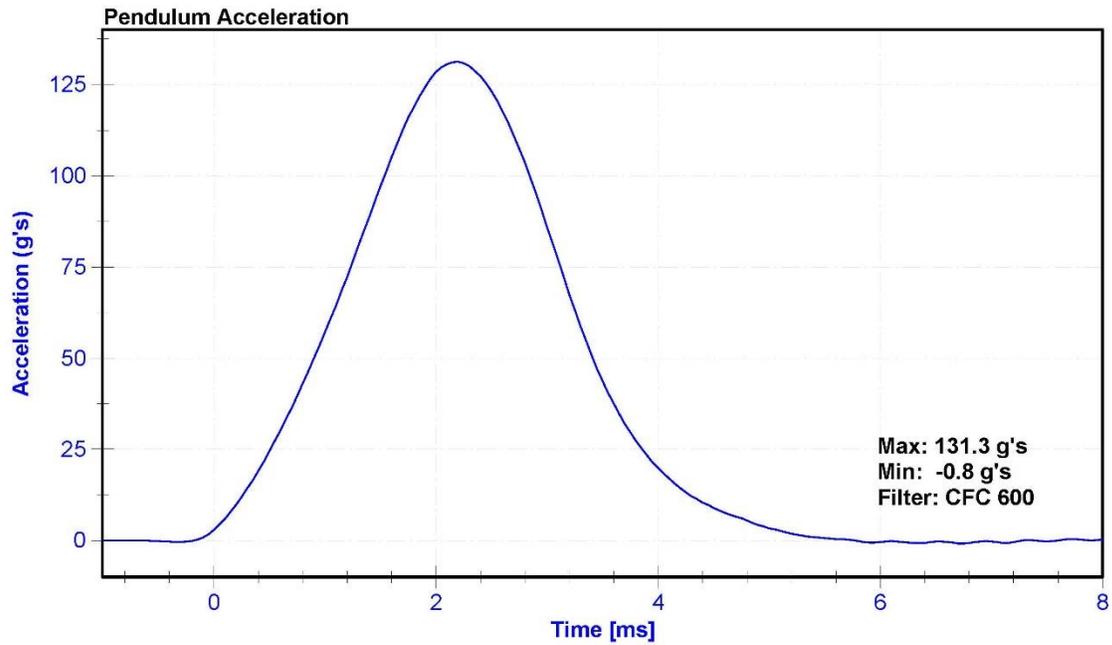

CALIBRATION TEST RESULTS

POST-TEST

HYBRID III 50TH PERCENTILE MALE - DRIVER ATD

SERIAL NO: 1046




External Measurements - Hybrid 3 - 50th Male

Technician: M.Hartung

Date: 10/14/2016

Dummy Serial Number: 1046

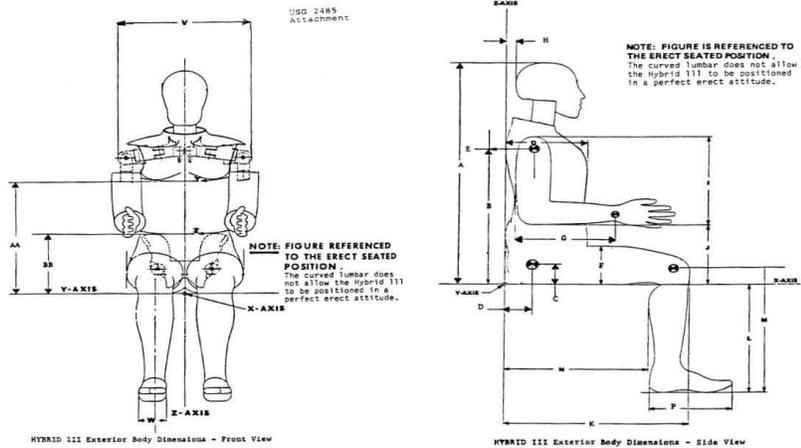

Symbol	Description	Specification (in)		Result (in)	Pass/Fail
A	Sitting Height	34.6	35.0	34.6	Pass
B	Shoulder Pivot Height	19.9	20.5	20.1	Pass
C	H-Point Height	3.3	3.5	3.5	Pass
D	H-Point from Backline	5.3	5.5	5.5	Pass
E	Shoulder Pivot from Backline	3.3	3.7	3.6	Pass
F	Thigh Clearance	5.5	6.1	5.8	Pass
G	Back of Elbow to Wrist Pivot	11.4	12.0	11.6	Pass
H	Head Back to Backline	1.6	1.8	1.7	Pass
I	Shoulder to Elbow Length	13.0	13.6	13.0	Pass
J	Elbow Rest Height	7.5	8.3	7.9	Pass
K	Buttock to Knee Length	22.8	23.8	23.2	Pass
L	Popliteal Height	16.9	17.9	17.4	Pass
M	Knee Pivot Height	19.1	19.7	19.5	Pass
N	Buttock Popliteal Length	17.8	18.8	18.2	Pass
O	Chest Depth without Jacket	8.4	9.0	8.6	Pass
P	Foot Length (right)	9.9	10.5	10.2	Pass
V	Shoulder Breadth	16.3	17.2	16.7	Pass
W	Foot Breadth	3.6	4.2	4.1	Pass
Y	Chest Circumference with Jacket	38.2	39.4	39.2	Pass
Z	Waist Circumference	32.9	34.1	33.6	Pass
AA	Reference Location (Chest Circumference)	16.9	17.1	17.0	Pass
BB	Reference Location (Waist Circumference)	8.9	9.1	9.0	Pass


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	1046	Laboratory Supervisor	M. Goehle




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.3	Pass
Humidity	10	70	%	49.1	Pass
Resultant Acceleration	225	275	g's	249.8	Pass
Oscillation	0	10	%	2.7	Pass
Lateral Acceleration	-15	15	g's	7.3	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P58871	9/19/2016	3/20/2017
Y Accelerometer	ENDEVCO 7264	AC-P12359	9/19/2016	3/20/2017
Z Accelerometer	ENDEVCO 7264CT	AC-P52133	9/19/2016	3/20/2017

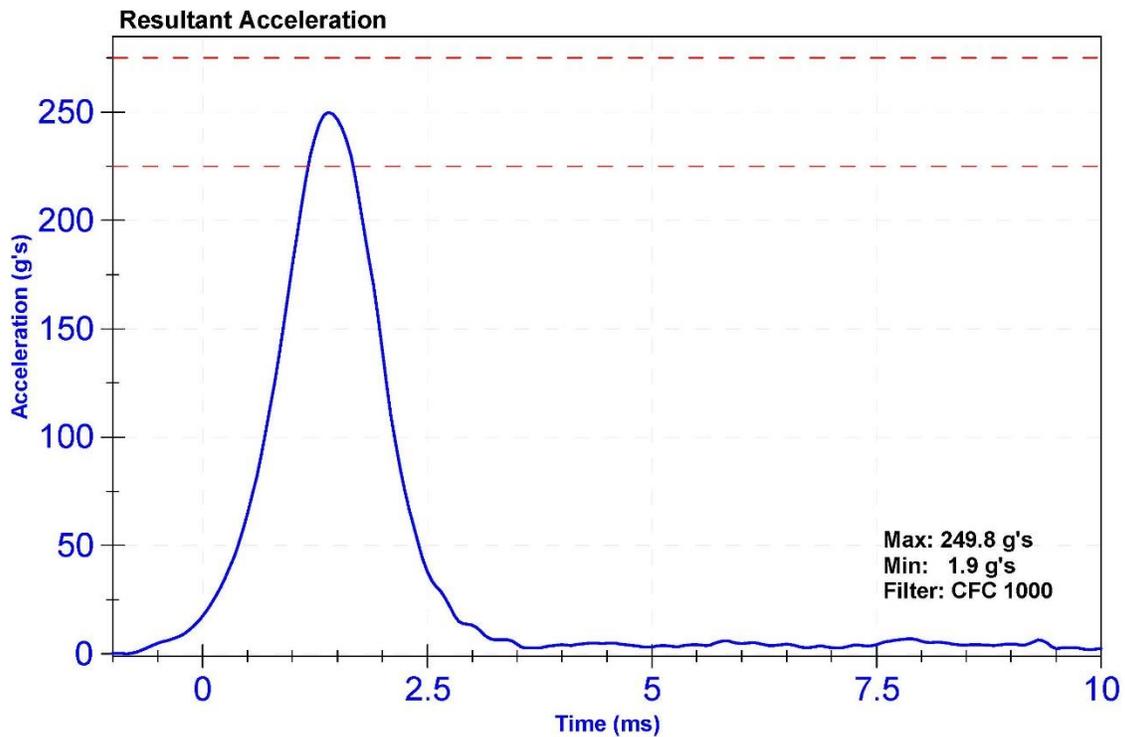

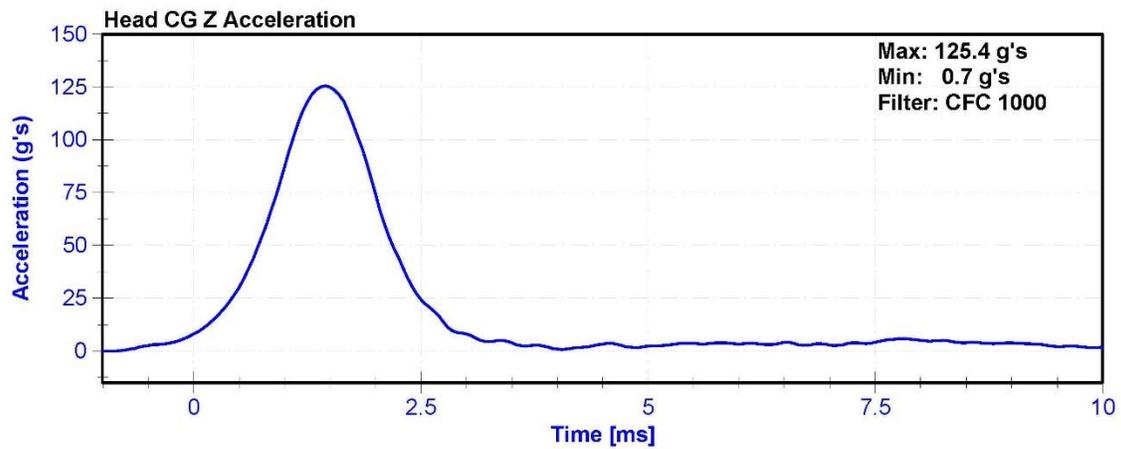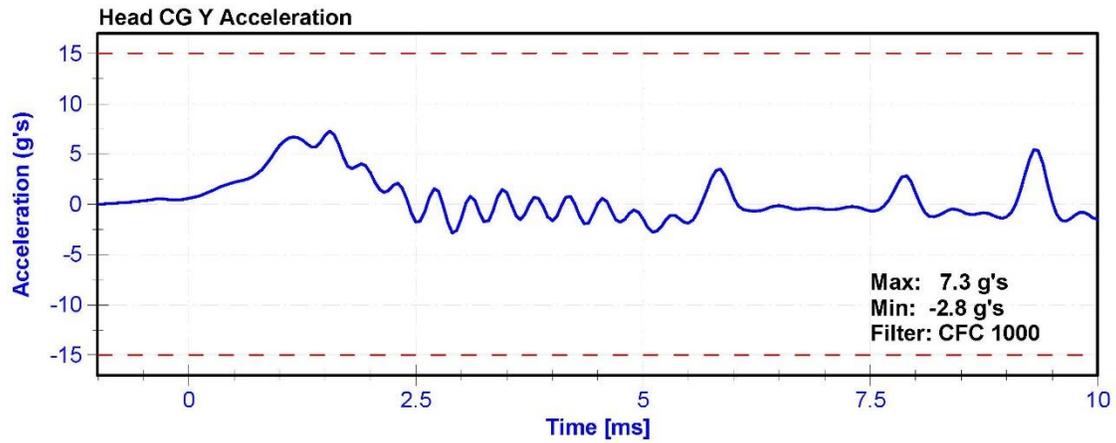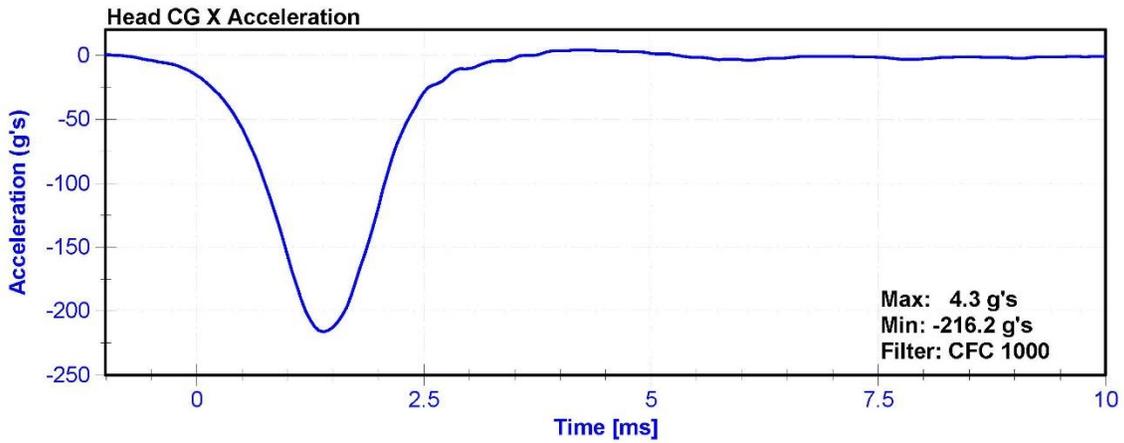

ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	1046	Laboratory Supervisor	M.Goehle


Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.0	Pass
Humidity	10	70	%	43.9	Pass
Velocity	6.89	7.13	m/s	7.037	Pass
Pendulum Deceleration at 10ms	22.5	27.5	g's	25.03	Pass
Pendulum Deceleration at 20ms	17.6	22.6	g's	20.40	Pass
Pendulum Deceleration at 30ms	12.5	18.5	g's	15.91	Pass
Max. Pendulum Deceleration After 30ms	0	29	g's	26.6	Pass
Pendulum Deceleration Time to 5 g's	34	42	ms	37.4	Pass
Maximum D Plane Rotation	64	78	deg	68.1	Pass
Time to Maximum Rotation	57	64	ms	58.3	Pass
Rotation Decay to Zero	113	127	ms	114.1	Pass
Moment About Occipital Condyle	88.1	108.4	Nm	92.56	Pass
Time to Maximum Moment	47	58	ms	49.5	Pass
Moment Decay to Zero	97	107	ms	98.0	Pass


Transducer Calibrations




Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5F3	5/10/2016	5/10/2017
Pendulum Potentiometer	ETI SP22G	DS-PendPot	10/3/2016	10/3/2017
Condyle Potentiometer	ETI SP22G	DS-CondPot	10/3/2016	10/3/2017
Upper Neck Load Cell	DENTON 1716A	LC-2186Fx	5/24/2016	5/24/2017

D-Plane Rotation

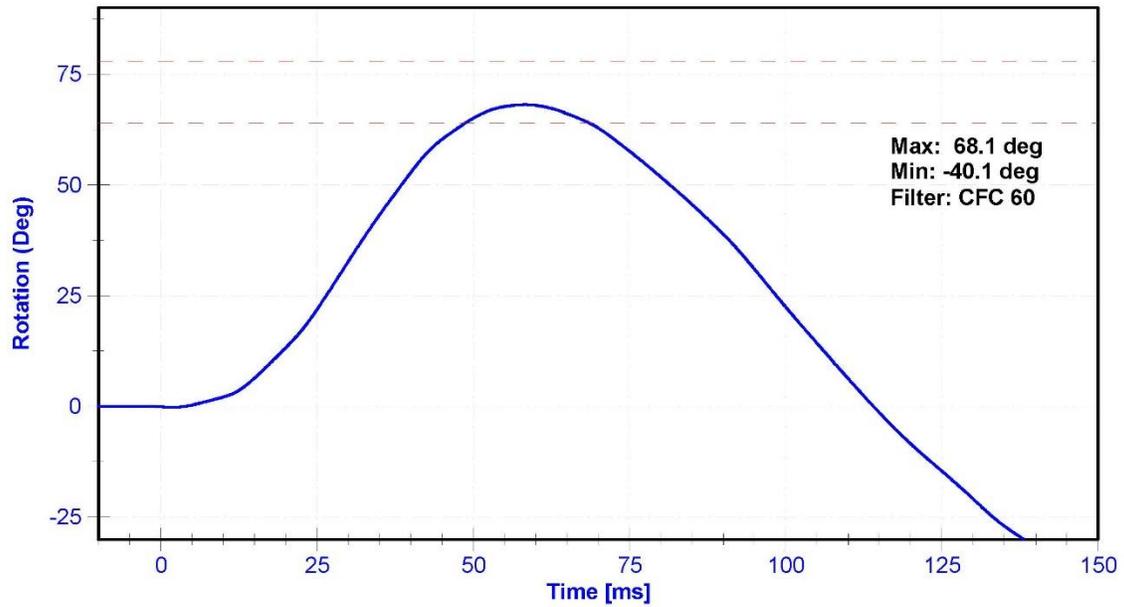

Moment About Occipital Condyle

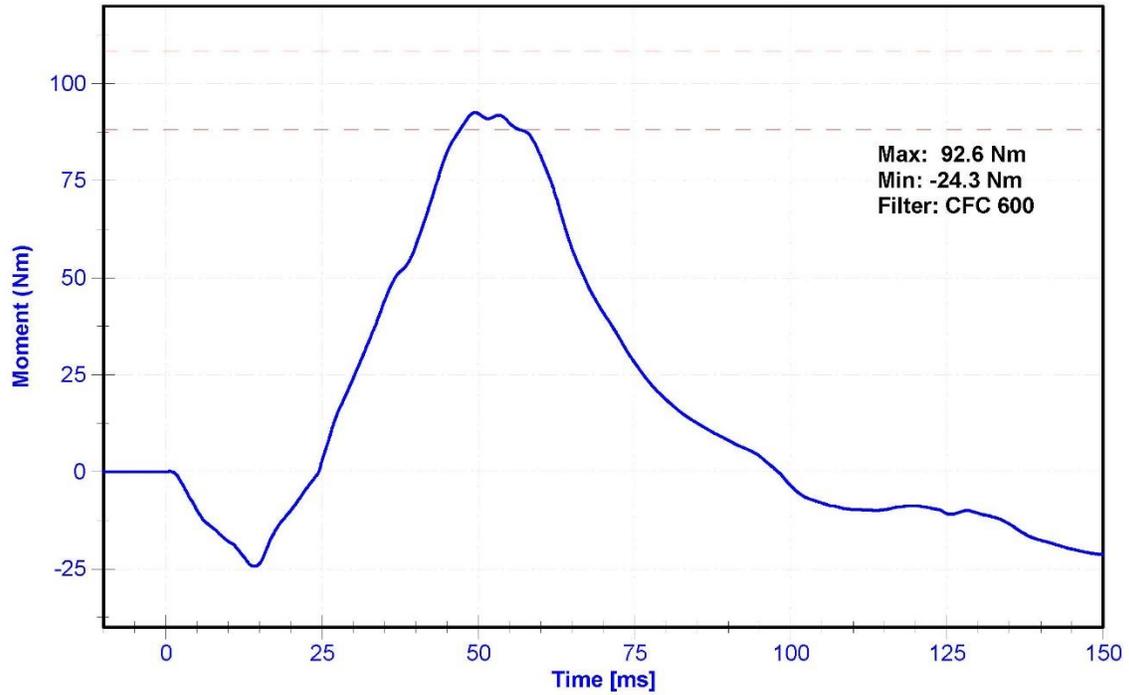

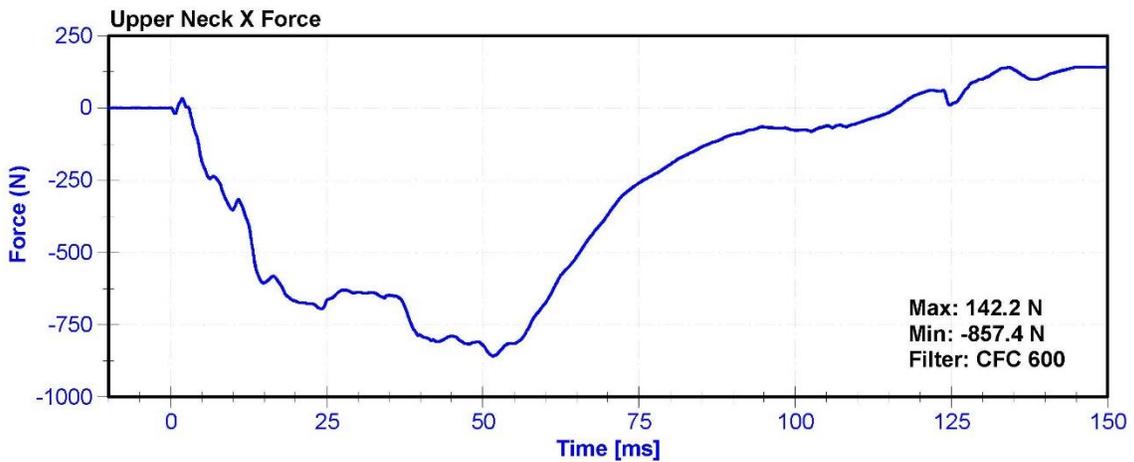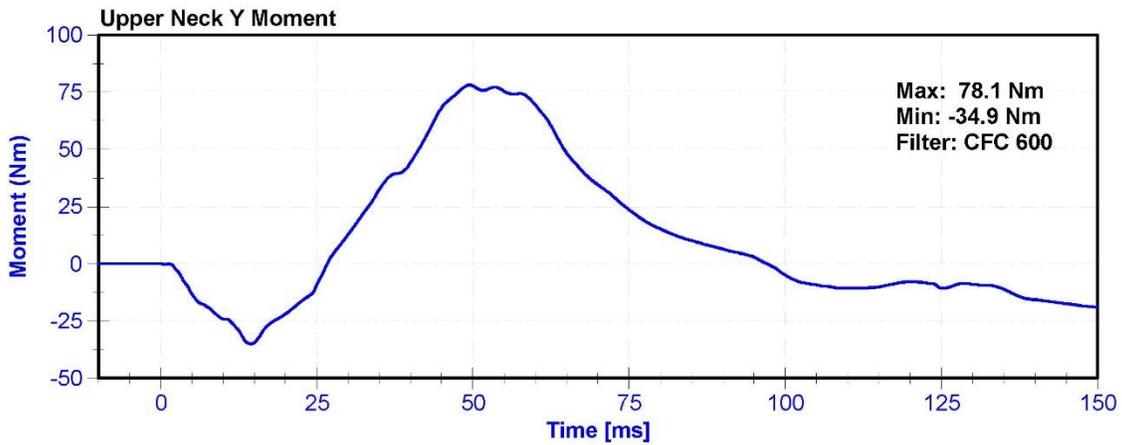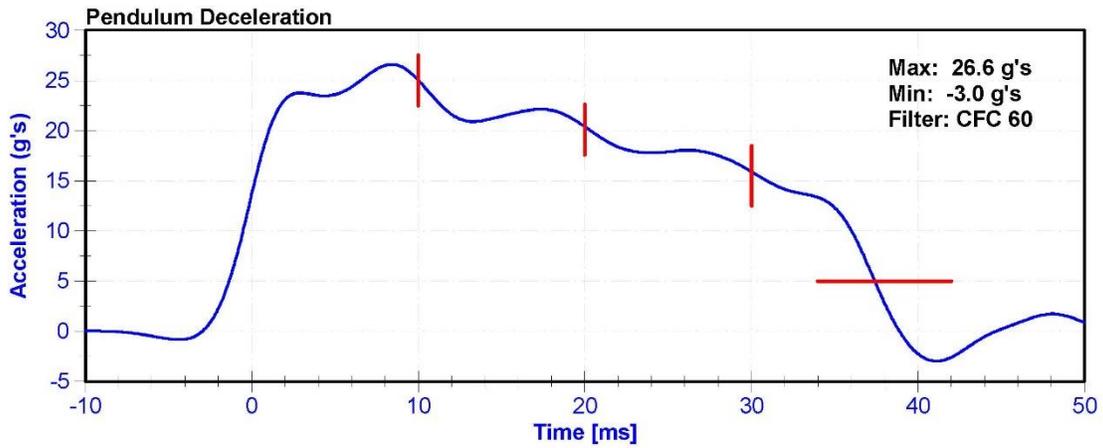



ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	1046	Laboratory Supervisor	M.Goehle




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21	Pass
Humidity	10	70	%	40.3	Pass
Velocity	5.94	6.19	m/s	6.025	Pass
Pendulum Deceleration at 10ms	17.2	21.2	g's	20.78	Pass
Pendulum Deceleration at 20ms	14	19	g's	17.5	Pass
Pendulum Deceleration at 30ms	11	16	g's	13.5	Pass
Max. Pendulum Deceleration After 30ms	0	22	g's	21.6	Pass
Pendulum Deceleration Time to 5 g's	38	46	ms	39.2	Pass
Maximum D Plane Rotation	81	106	deg	94.8	Pass
Time to Maximum Rotation	72	82	ms	75.9	Pass
Rotation Decay to Zero	147	174	ms	151.8	Pass
Minimum Moment About OC	-80	-52.9	Nm	-67.70	Pass
Time to Minimum Moment	65	79	ms	69.2	Pass
Moment Decay to Zero	120	148	ms	137.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5F3	5/10/2016	5/10/2017
Pendulum Potentiometer	ETI SP22G	DS-PendPot	10/3/2016	10/3/2017
Condyle Potentiometer	ETI SP22G	DS-CondPot	10/3/2016	10/3/2017
Upper Neck Load Cell	DENTON 1716A	LC-2186Fx	5/24/2016	5/24/2017

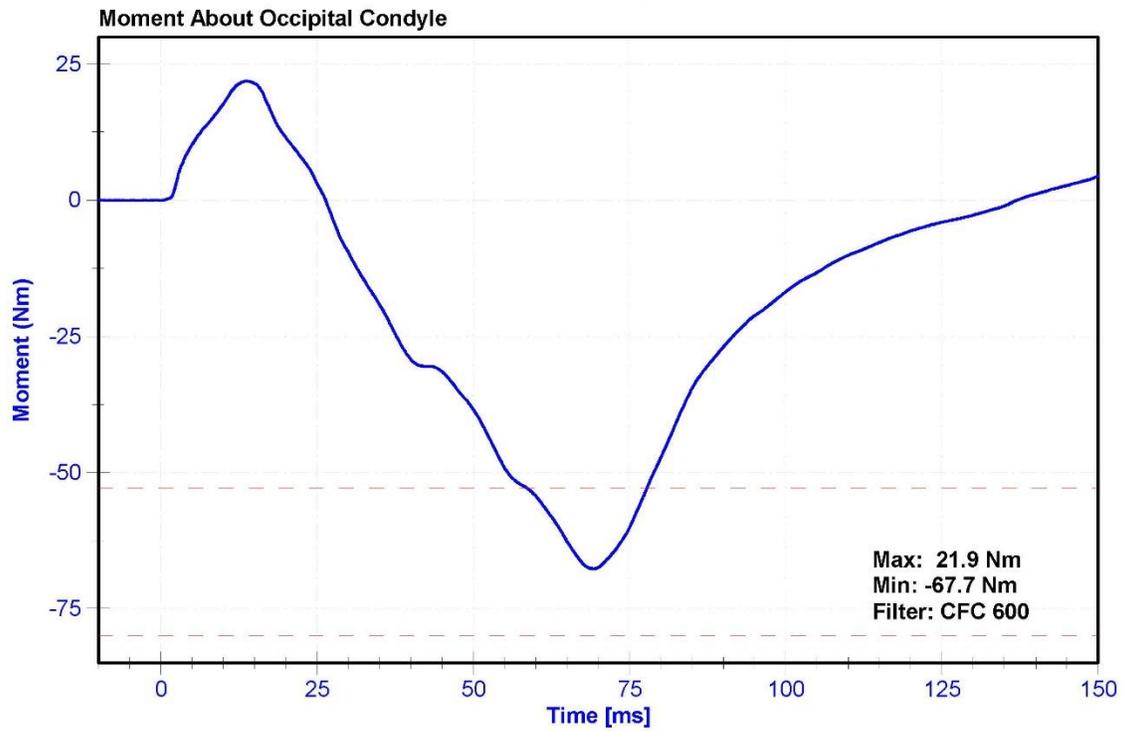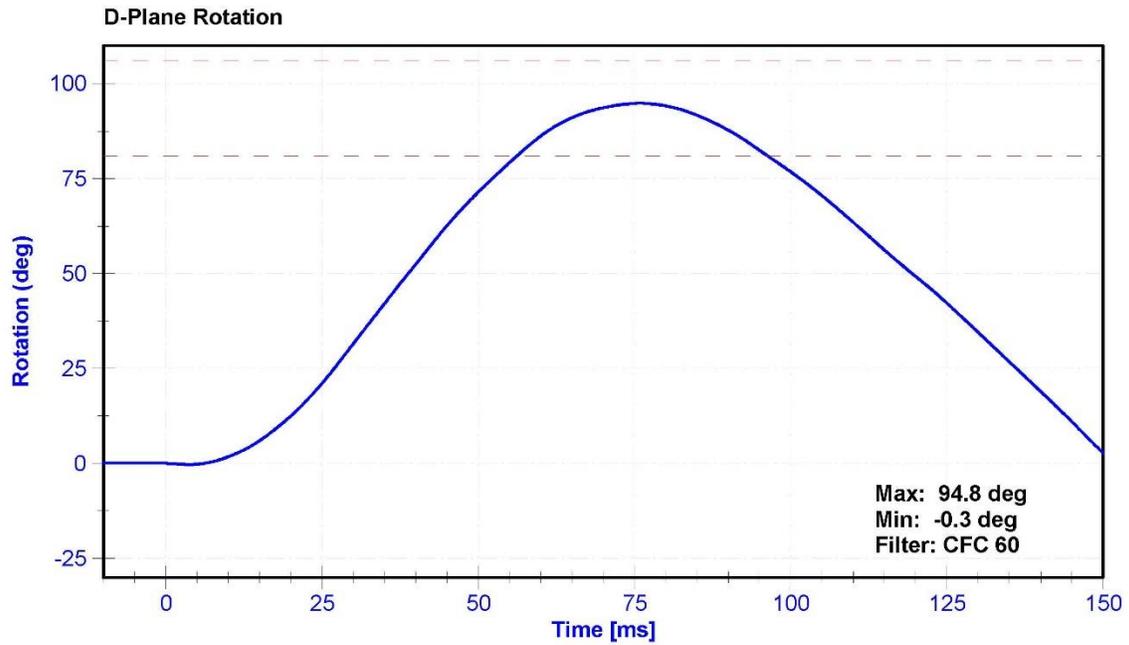

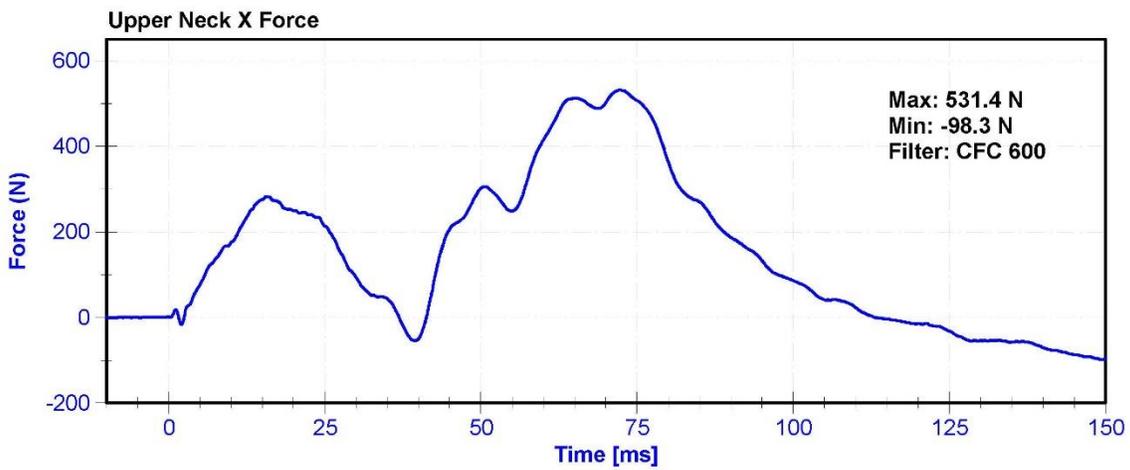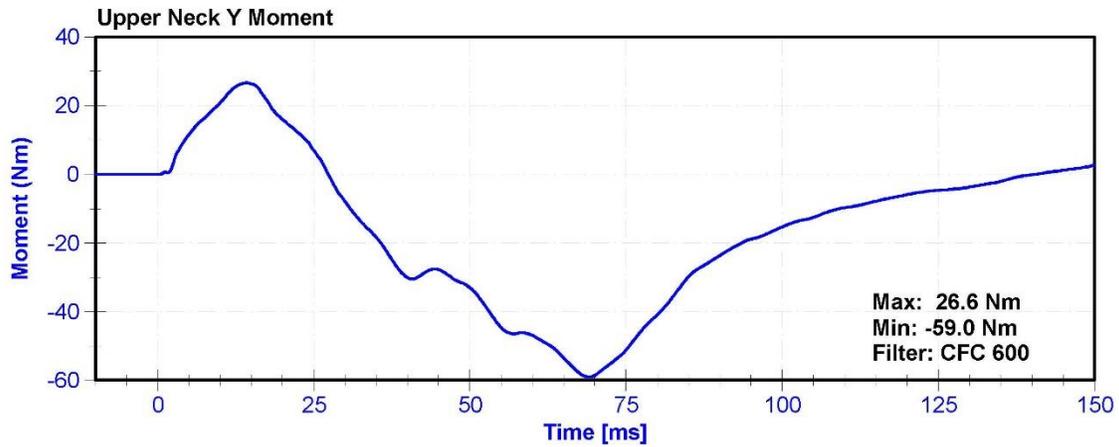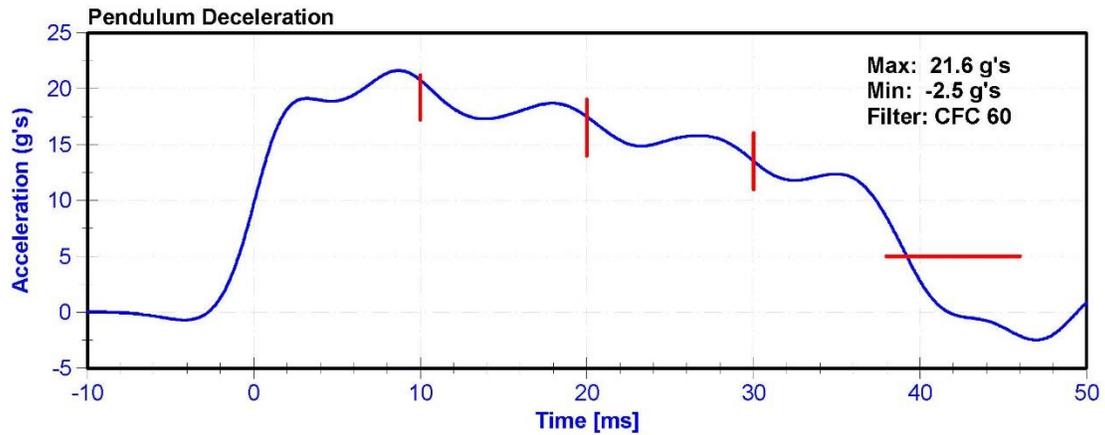


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	1046	Laboratory Supervisor	M.Goehle



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.3	Pass
Humidity	10	70	%	47.5	Pass
Velocity	6.59	6.83	m/s	6.670	Pass
Chest Displacement	-72.6	-63.5	mm	-71.98	Pass
Resistive Force	5160	5894	N	5637.7	Pass
Hysteresis	65	85	%	70.4	Pass


Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P16593	4/1/2016	4/1/2017
Chest Potentiometer	Servo 14CB1-2897	DS-1046	9/19/2016	9/19/2017

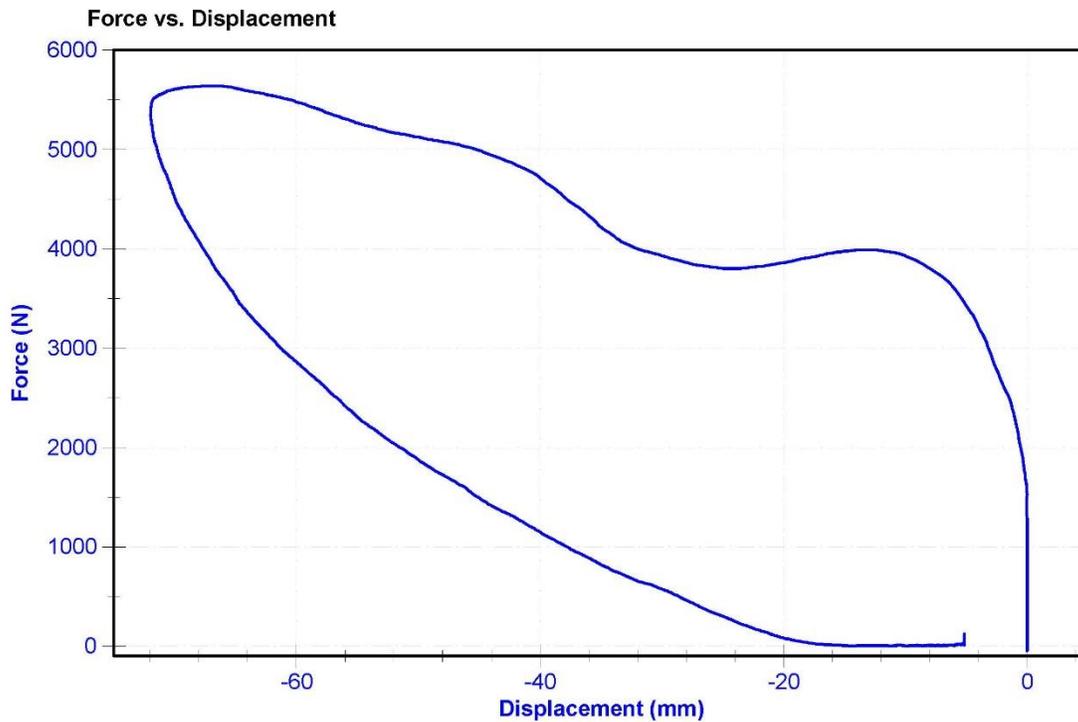


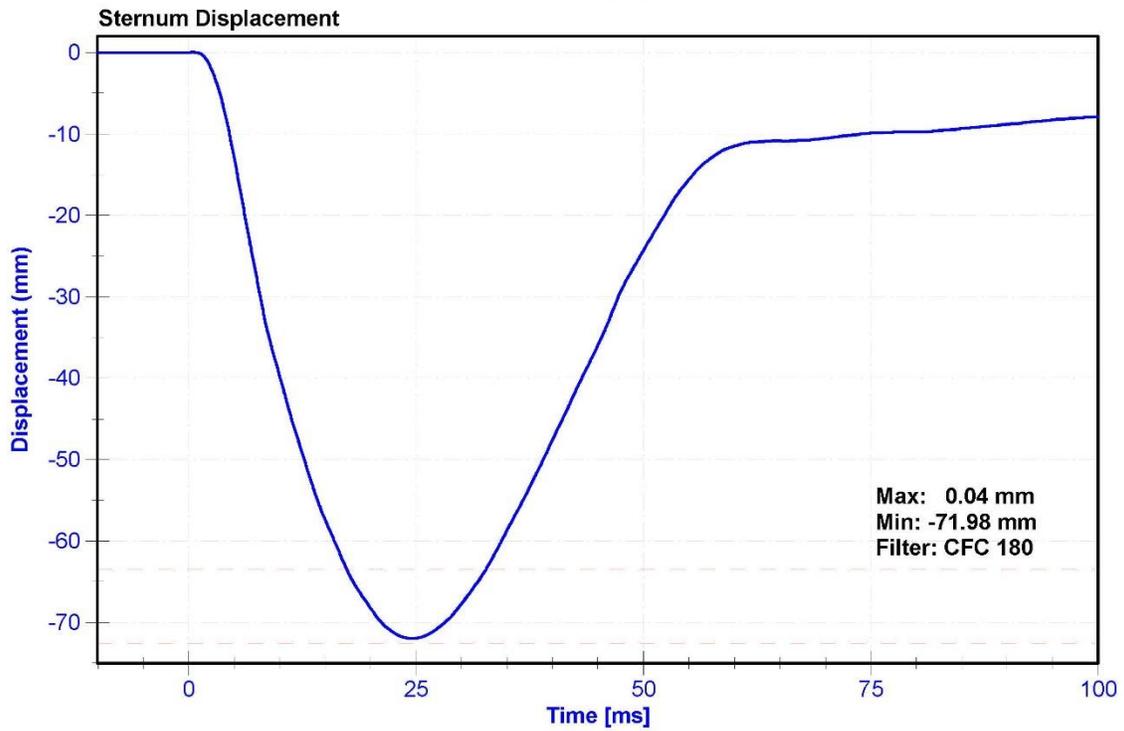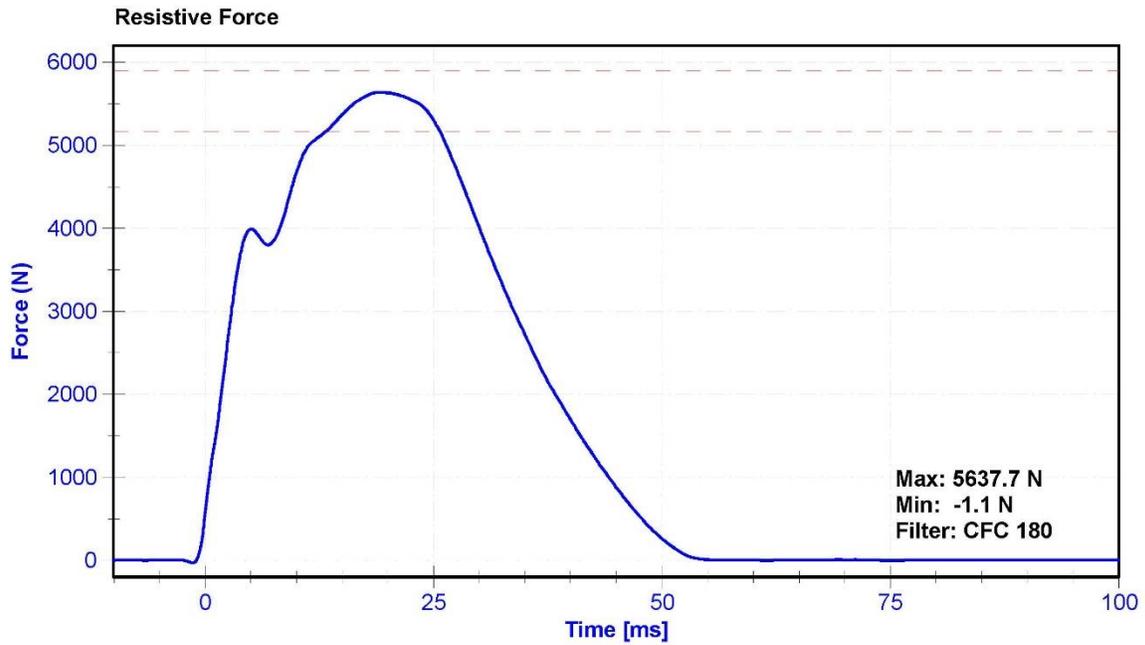

Probe Acceleration

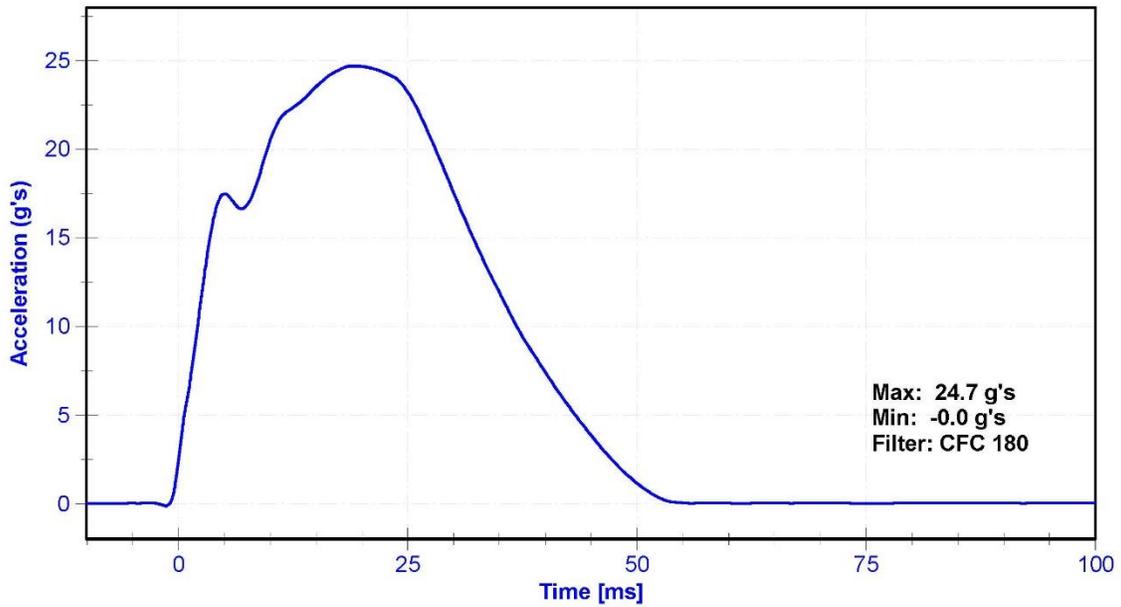

Change in Velocity (Integrated Acceleration)

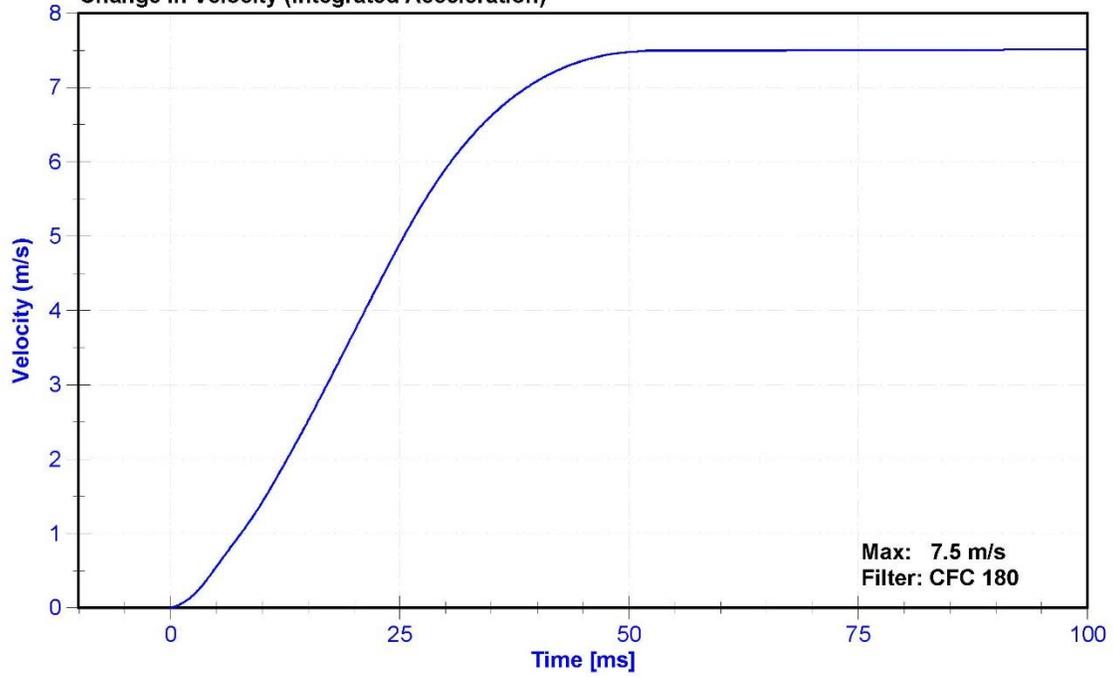


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	1046	Laboratory Supervisor	M.Goehle

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.6	Pass
Humidity	10	70	%	35.0	Pass
Average Velocity	5	10	deg/s	7.5	Pass
Angle at 203Nm	40	50	deg	44.2	Pass
Moment at 30 degrees	0	94.9	Nm	82.6	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	4/4/2016	4/4/2017
Load Cell	Key Trans 2301-02	LC-115 My	4/21/2016	4/21/2017

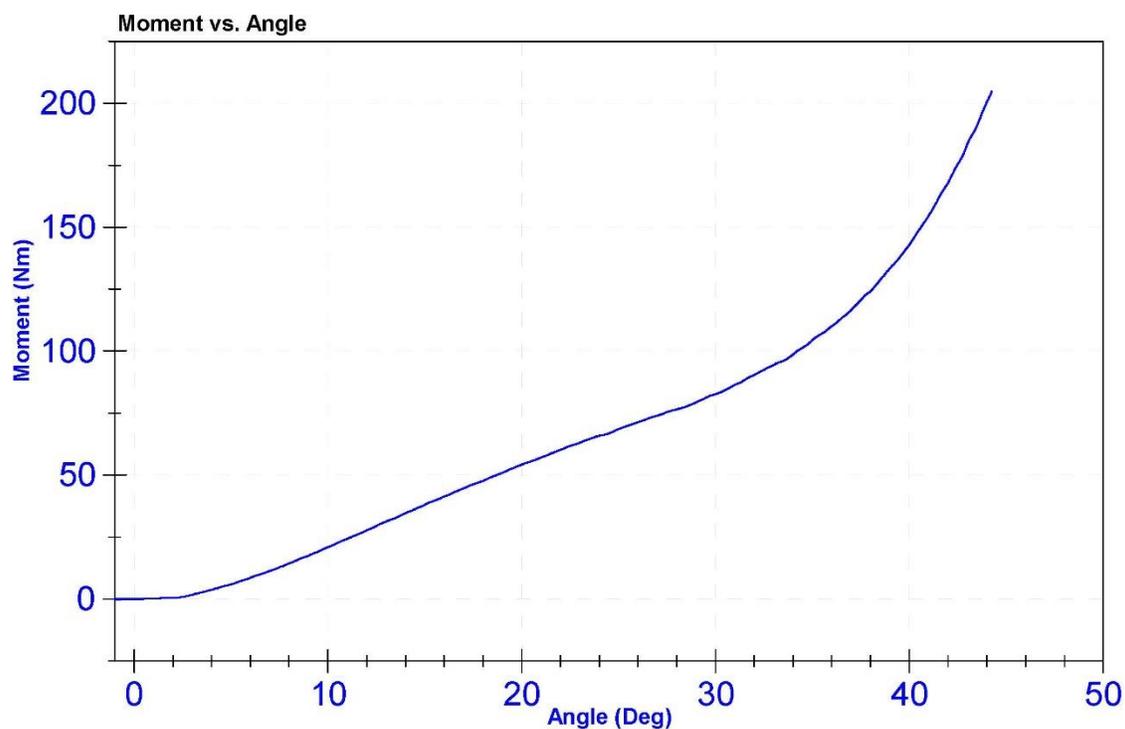


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	1046	Laboratory Supervisor	M.Goehle

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.6	Pass
Humidity	10	70	%	35.0	Pass
Average Velocity	5	10	deg/s	7.4	Pass
Angle at 203Nm	40	50	deg	43.1	Pass
Moment at 30 degrees	0	94.9	Nm	90.8	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	4/4/2016	4/4/2017
Load Cell	Key Trans 2301-02	LC-115 My	4/21/2016	4/21/2017

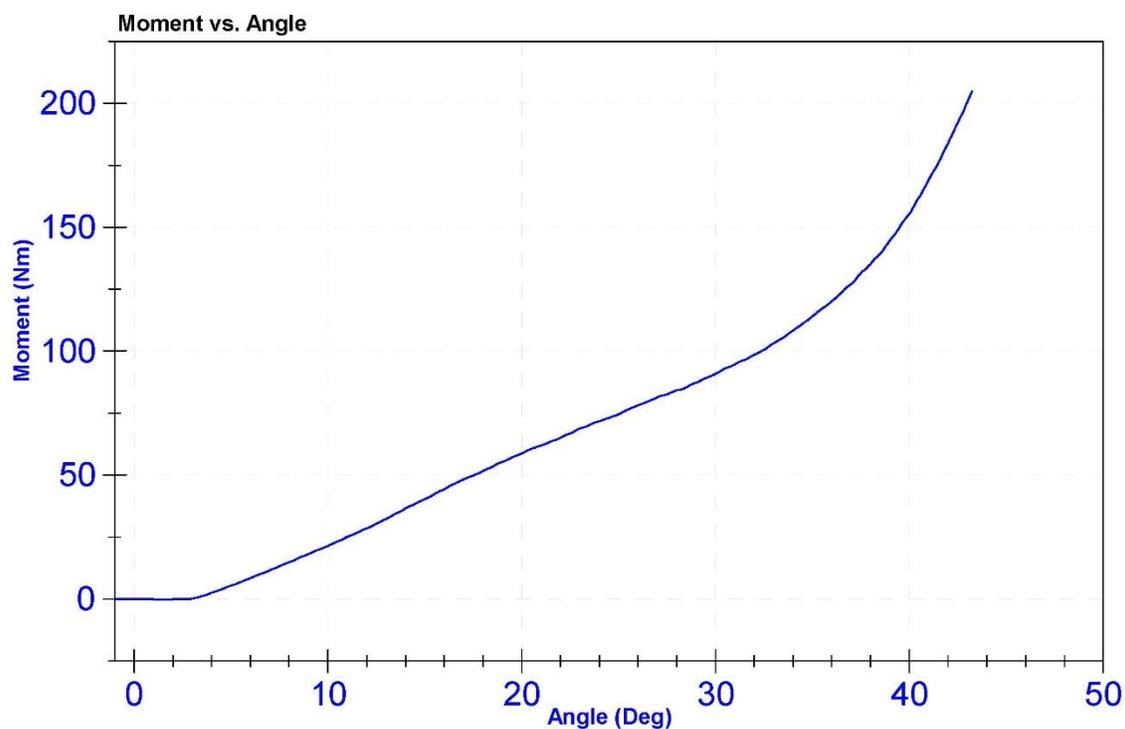


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	1046	Laboratory Supervisor	M. Goehle



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.1	Pass
Humidity	10	70	%	35.2	Pass
Velocity	2.07	2.13	m/s	2.078	Pass
Maximum Resistive Force	4720	5780	N	5414.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P16593	4/1/2016	4/1/2017

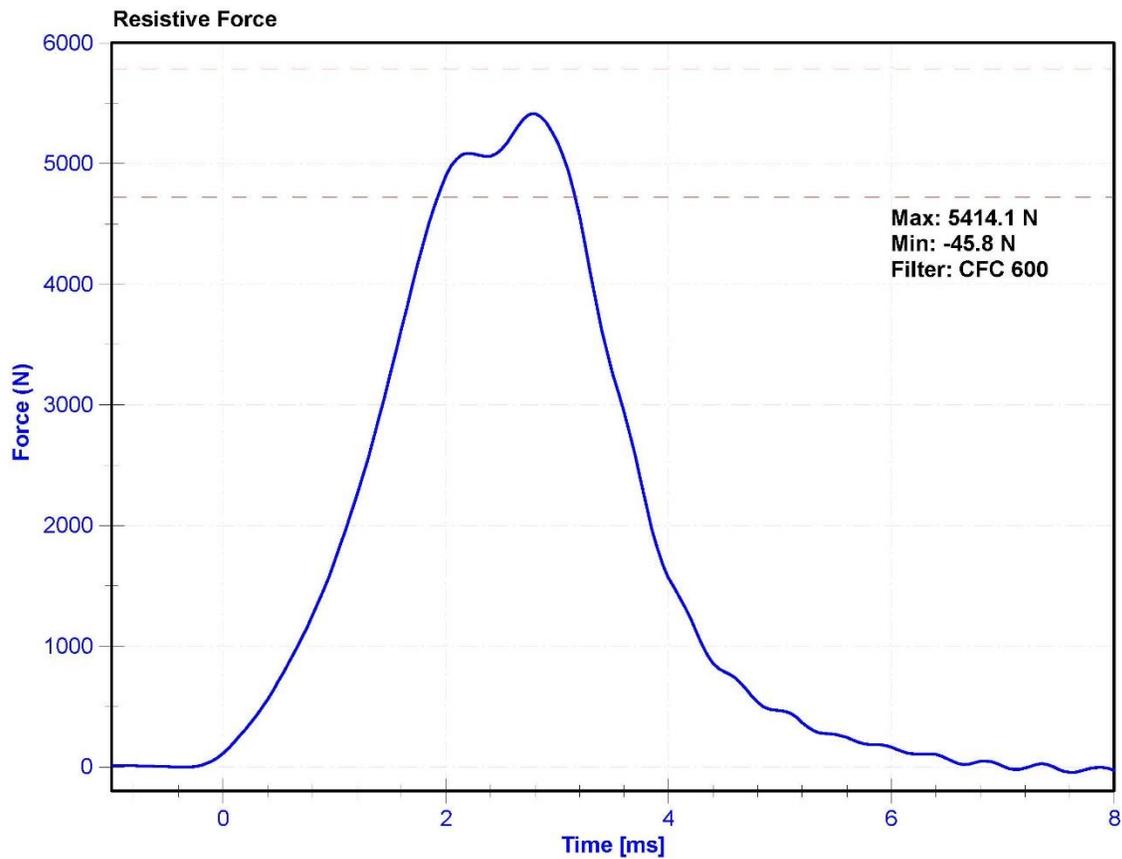

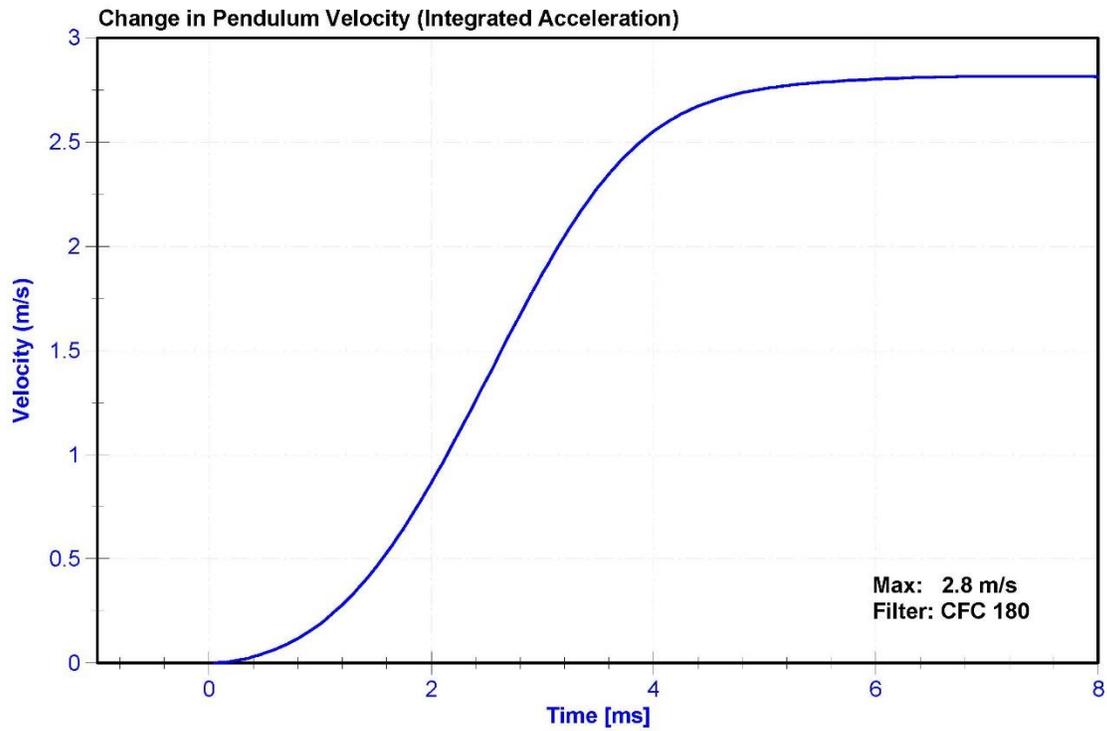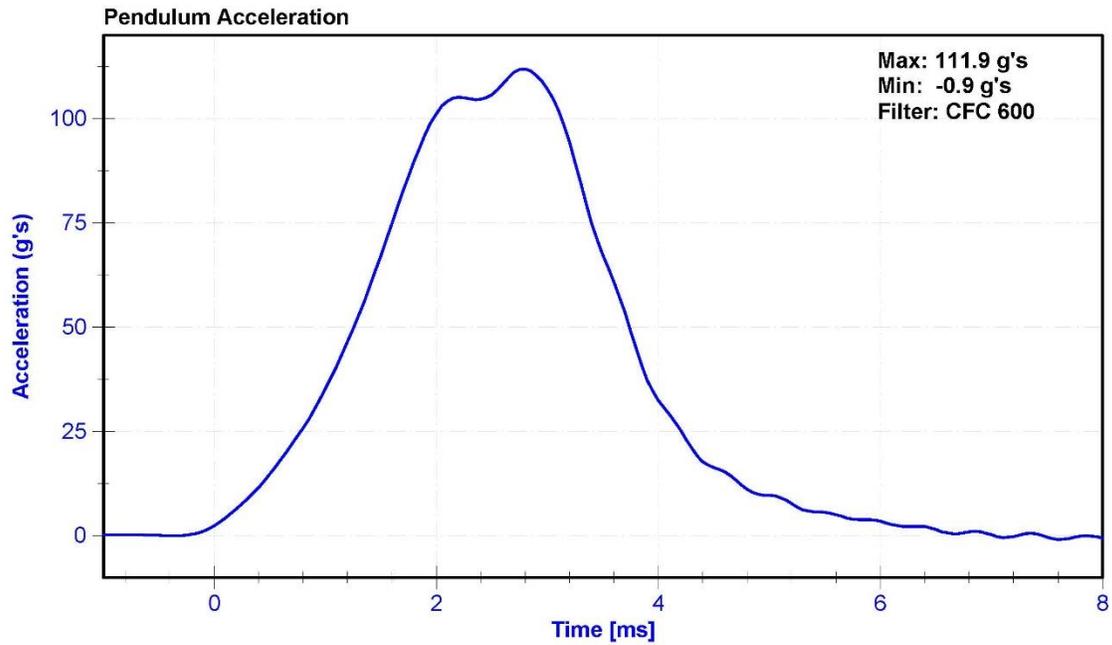


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	1046	Laboratory Supervisor	M. Goehle



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.1	Pass
Humidity	10	70	%	35.2	Pass
Velocity	2.07	2.13	m/s	2.076	Pass
Maximum Resistive Force	4720	5780	N	5219.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P16593	4/1/2016	4/1/2017

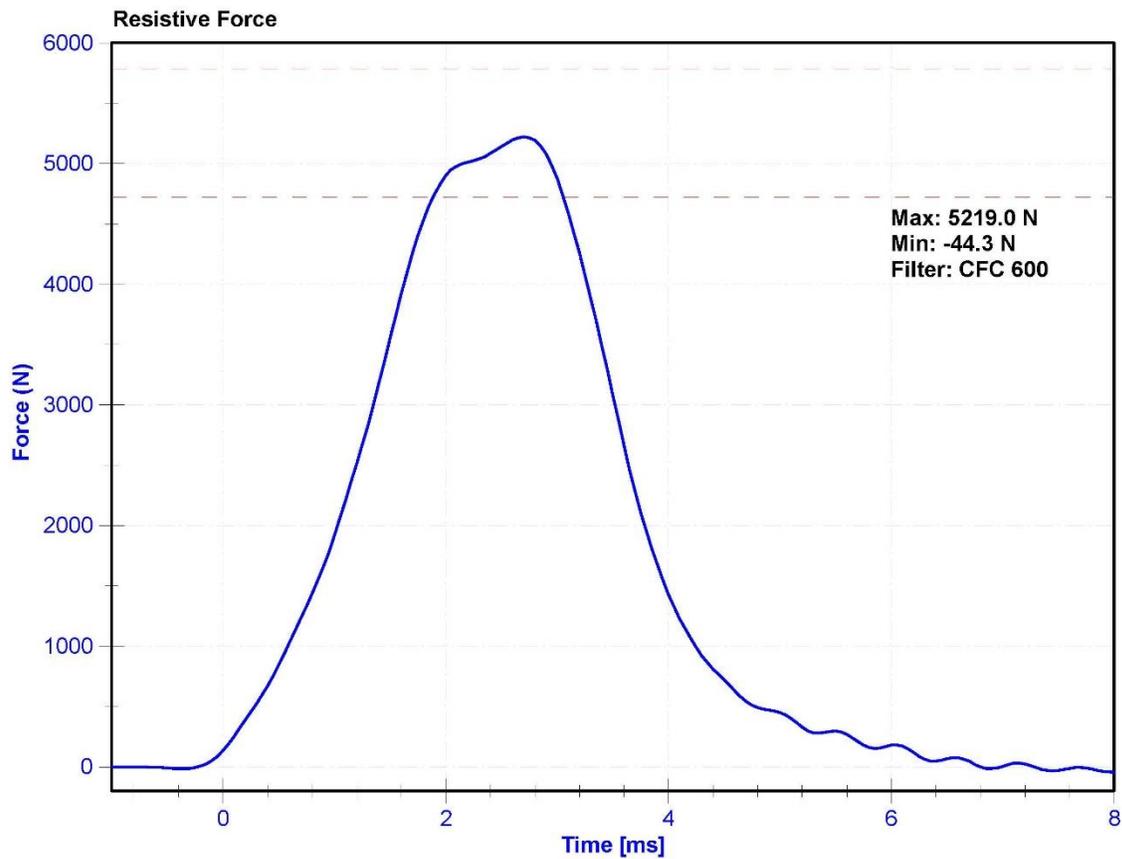

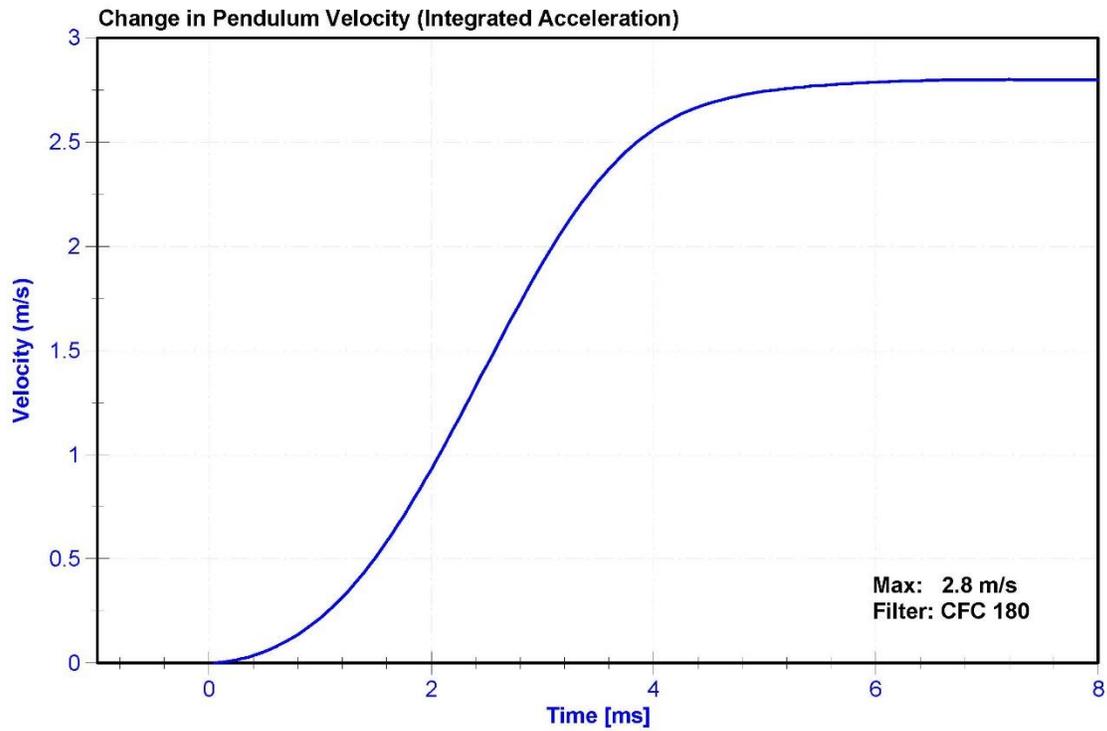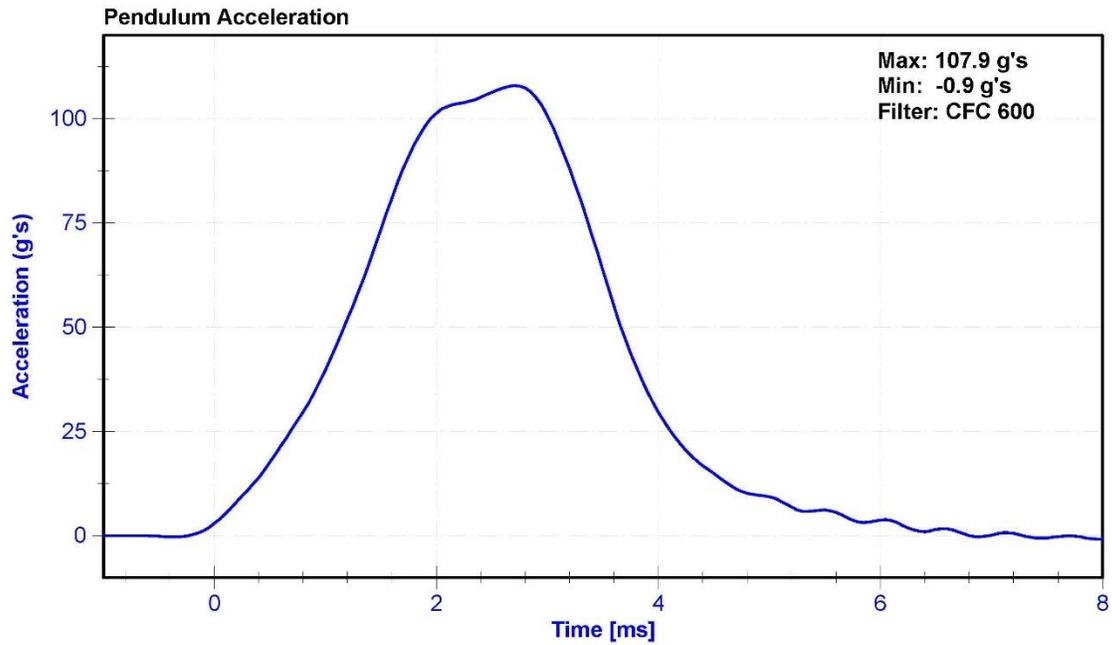

CALIBRATION TEST RESULTS

POST-TEST

HYBRID III 5TH PERCENTILE FEMALE - PASSENGER ATD

SERIAL NO: 288




External Measurements - Hybrid 3 - 5th Female

Technician: M. Geesey

Date: 10/18/2016

Dummy Serial Number: 288

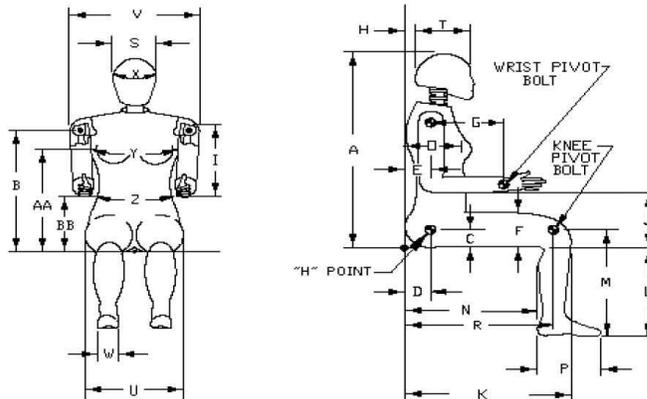

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	775	800	781	Pass
B	Shoulder Pivot Height	432	457	440	Pass
C	H-Point Height	81	86	83	Pass
D	H-Point from Backline	145	150	146	Pass
E	Shoulder Pivot from Backline	69	84	76	Pass
F	Thigh Clearance	119	135	125	Pass
G	Back of Elbow to Wrist Pivot	244	259	248	Pass
H	Head Back to Backline	43	48	46	Pass
I	Shoulder to Elbow Length	277	297	284	Pass
J	Elbow Rest Height	183	203	188	Pass
K	Buttock to Knee Length	521	546	541	Pass
L	Popliteal Height	356	376	365	Pass
M	Knee Pivot Height	394	419	398	Pass
N	Buttock Popliteal Length	414	439	430	Pass
O	Chest Depth without Jacket	175	191	179	Pass
P	Foot Length (right)	219	234	220	Pass
R	Buttock To Knee Pivot Length	457	483	461	Pass
S	Head Breadth	137	147	142	Pass
T	Head Depth	178	188	181	Pass
U	Hip Breadth	300	315	305	Pass
V	Shoulder Breadth	351	366	362	Pass
W	Foot Breadth	79	94	84	Pass
X	Head Circumference	528	549	538	Pass
Y	Chest Circumference with Jacket	851	881	854	Pass
Z	Waist Circumference	460	790	778	Pass
AA	Reference Location (Chest Circumference)	333	358	345	Pass
BB	Reference Location (Waist Circumference)	160	170	165	Pass


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	288	Laboratory Supervisor	M. Goehle




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.7	Pass
Humidity	10	70	%	51	Pass
Resultant Acceleration	250	300	g's	266.6	Pass
Oscillation	0	10	%	2.8	Pass
Lateral Acceleration	-15	15	g's	1.6	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264	AC-P80337	10/3/2016	4/3/2017
Y Accelerometer	ENDEVCO 7264CT	AC-P80265	10/3/2016	4/3/2017
Z Accelerometer	ENDEVCO 7264CT	AC-P83418	10/3/2016	4/3/2017

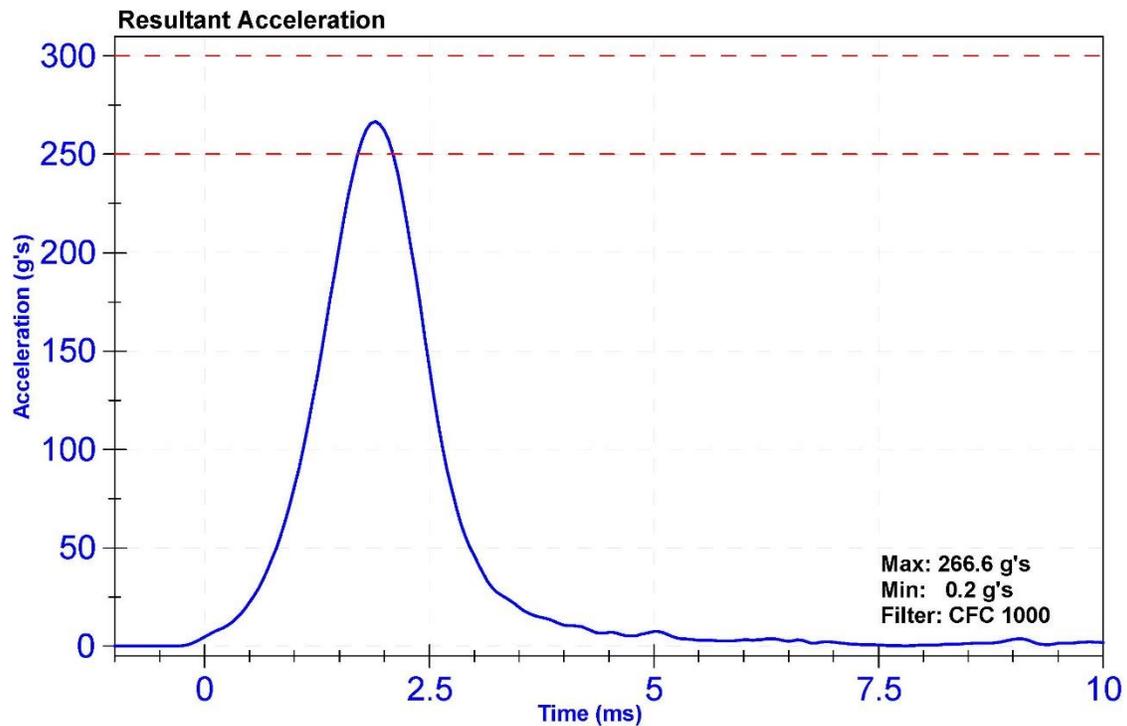

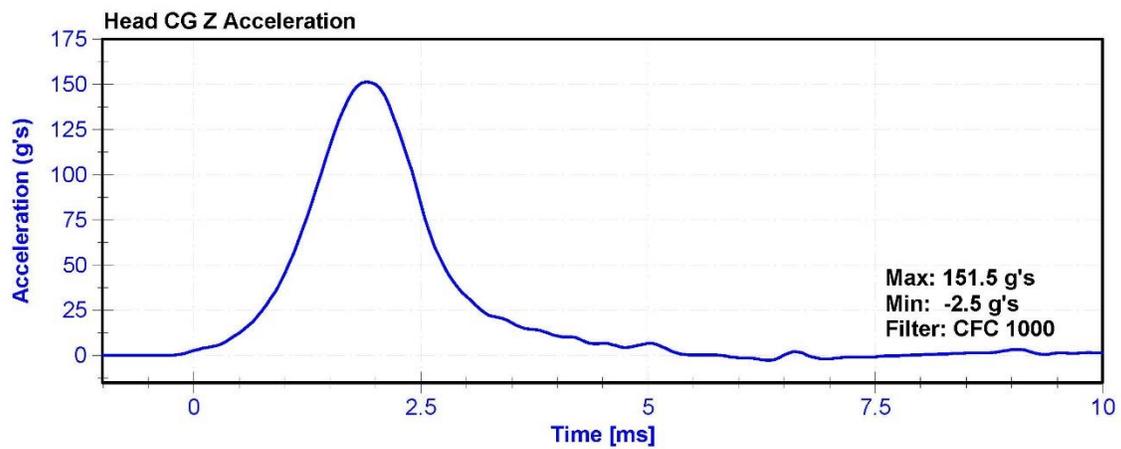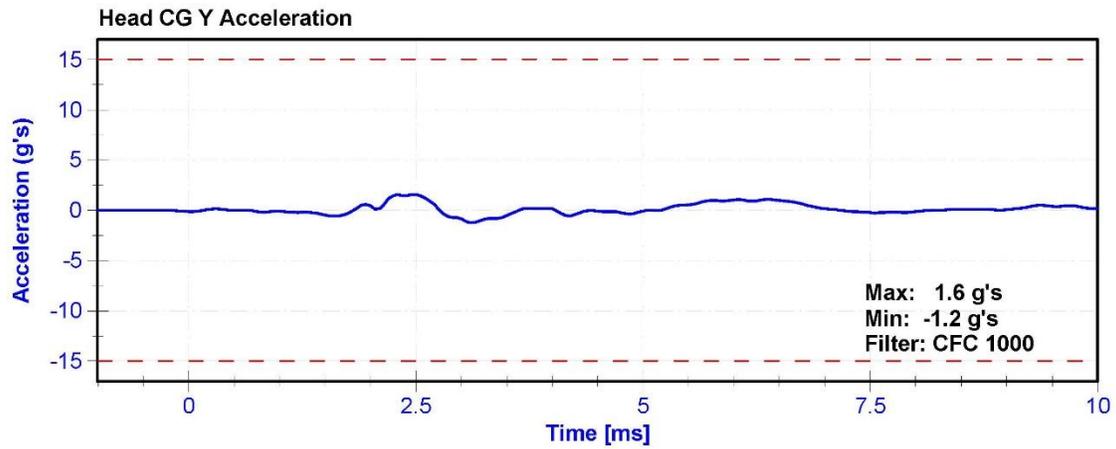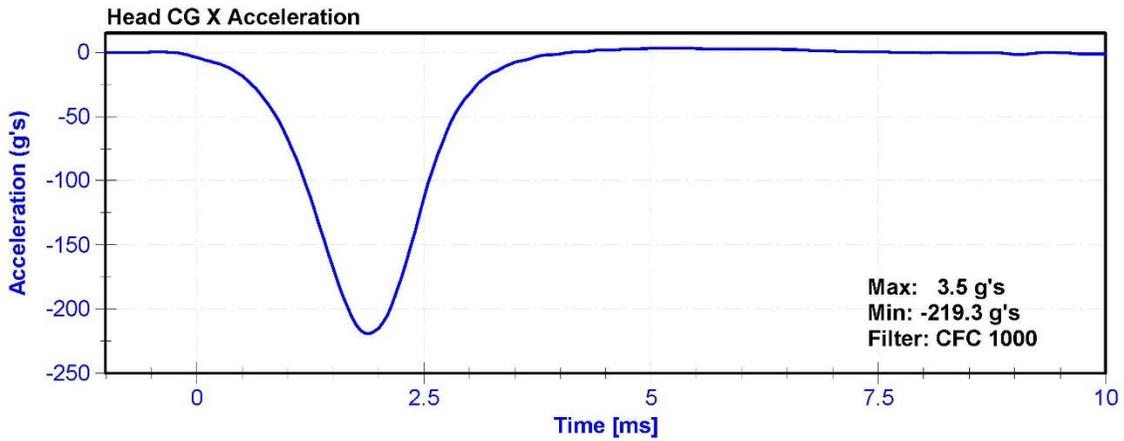


ATD Manufacturer	FTSS	Test Technician	S. Keller
ATD Serial Number	288	Laboratory Supervisor	M. Goehle



Results




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	54.5	Pass
Velocity	6.89	7.13	m/s	7.037	Pass
Pendulum Impulse at 10ms	2.1	2.5	m/s	2.45	Pass
Pendulum Impulse at 20ms	4.0	5.0	m/s	4.89	Pass
Pendulum Impulse at 30ms	5.8	7.0	m/s	6.96	Pass
Max D Plane Rotation	77	91	deg	83.5	Pass
Max Moment During Rotation Interval	69	83	Nm	77.1	Pass
Moment Decay to 10.0 Nm	80	100	ms	83.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5F3	5/10/2016	5/10/2017
Pendulum Potentiometer	ETI SP22G	DS-PendPot	10/3/2016	10/3/2017
Condyle Potentiometer	ETI SP22G	DS-CondPot	10/3/2016	10/3/2017
Upper Neck Load Cell	DENTON 1716A	LC-2206Fx	5/24/2016	5/24/2017

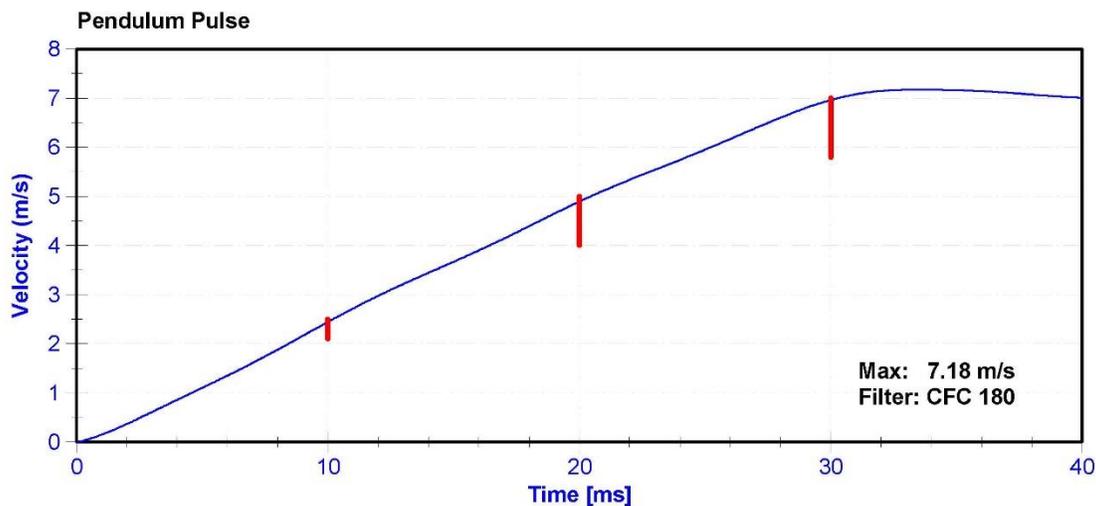

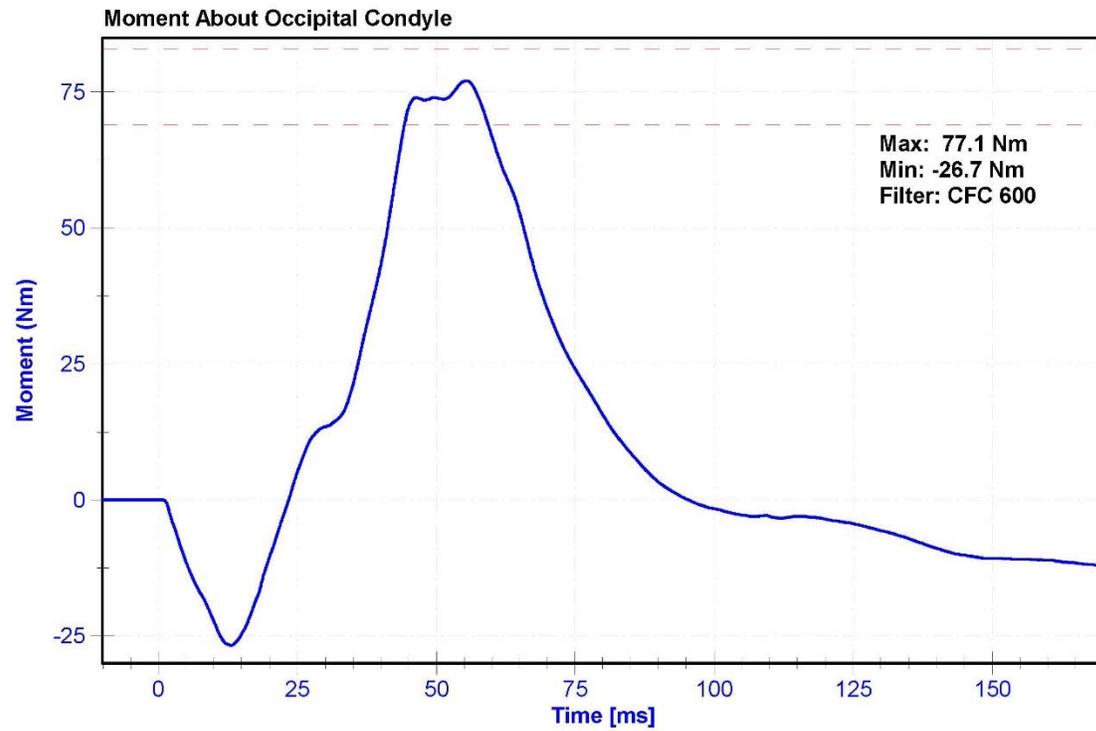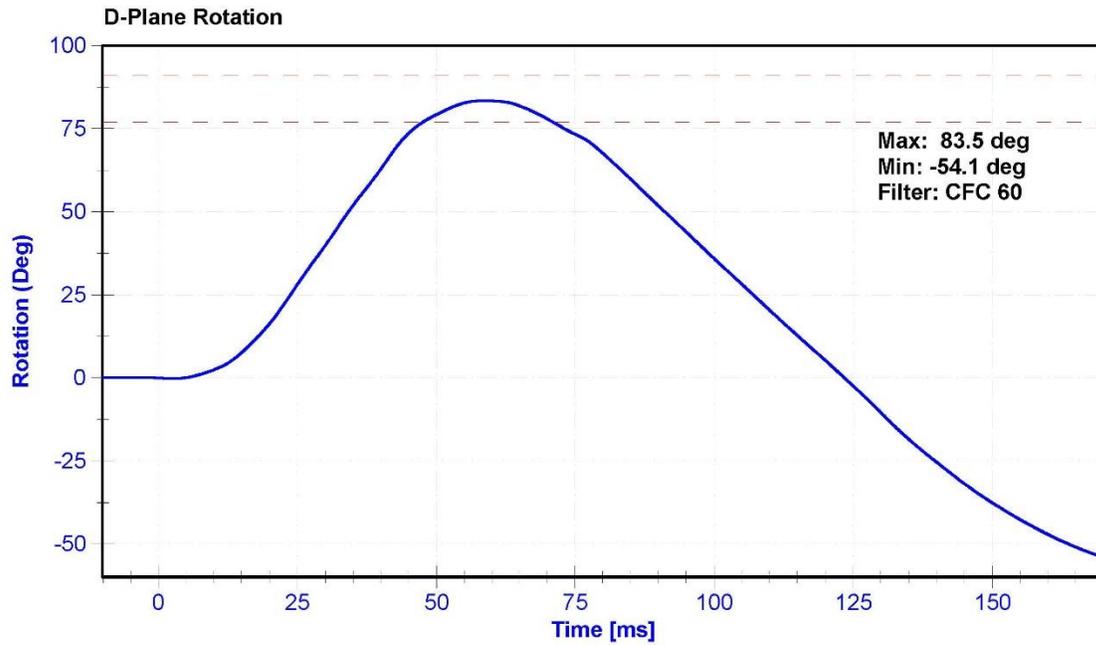

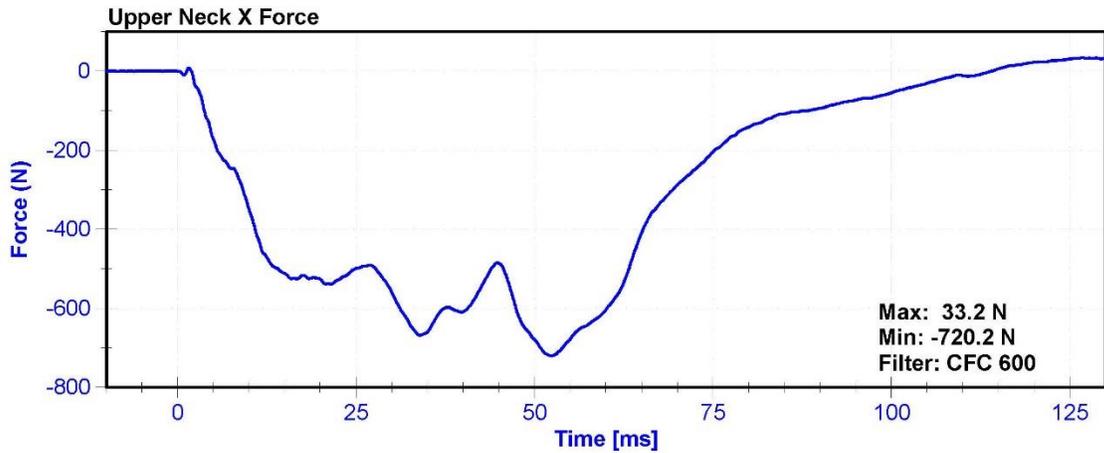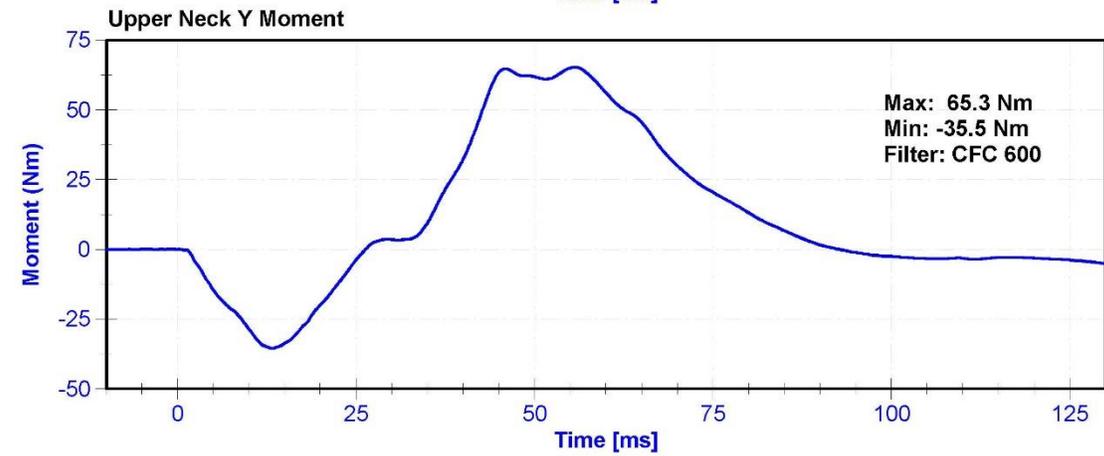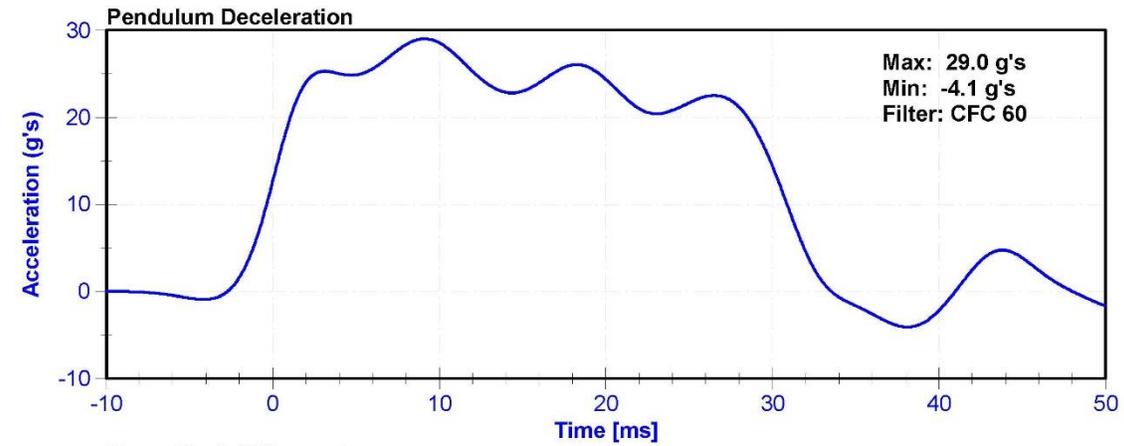


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	288	Laboratory Supervisor	M. Goehle



Results




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.0	Pass
Humidity	10	70	%	53.0	Pass
Velocity	5.95	6.19	m/s	6.068	Pass
Pendulum Impulse at 10ms	1.5	1.9	m/s	1.60	Pass
Pendulum Impulse at 20ms	3.1	3.9	m/s	3.34	Pass
Pendulum Impulse at 30ms	4.6	5.6	m/s	5.10	Pass
D Plane Rotation	99	114	deg	106.0	Pass
Moment During Rotation Interval	-65	-53	Nm	-61.7	Pass
Moment Decay to -10Nm	94	114	ms	103.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5F3	5/10/2016	5/10/2017
Pendulum Potentiometer	ETI SP22G	DS-PendPot	10/3/2016	10/3/2017
Condyle Potentiometer	ETI SP22G	DS-CondPot	10/3/2016	10/3/2017
Upper Neck Load Cell	DENTON 1716A	LC-2206Fx	5/24/2016	5/24/2017

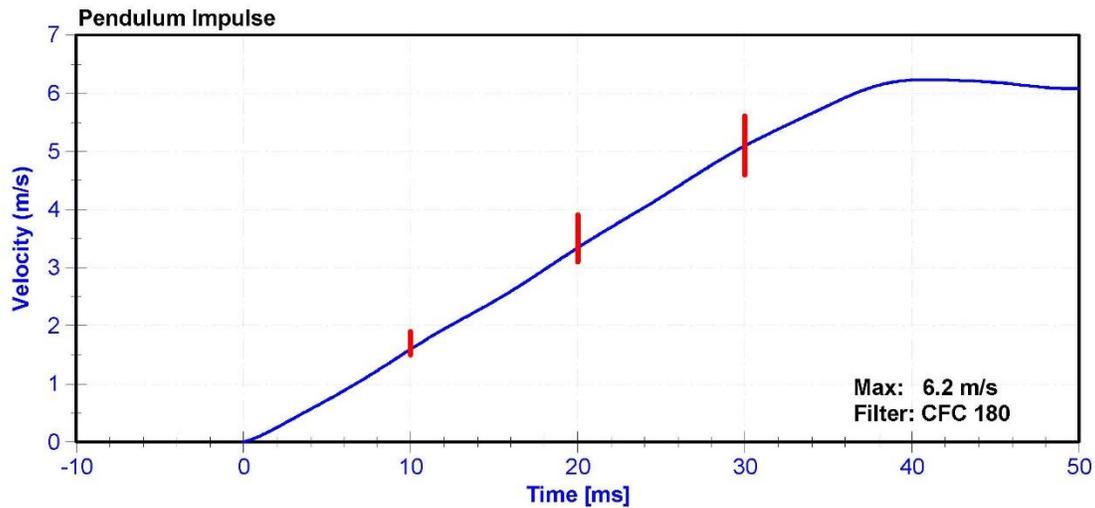

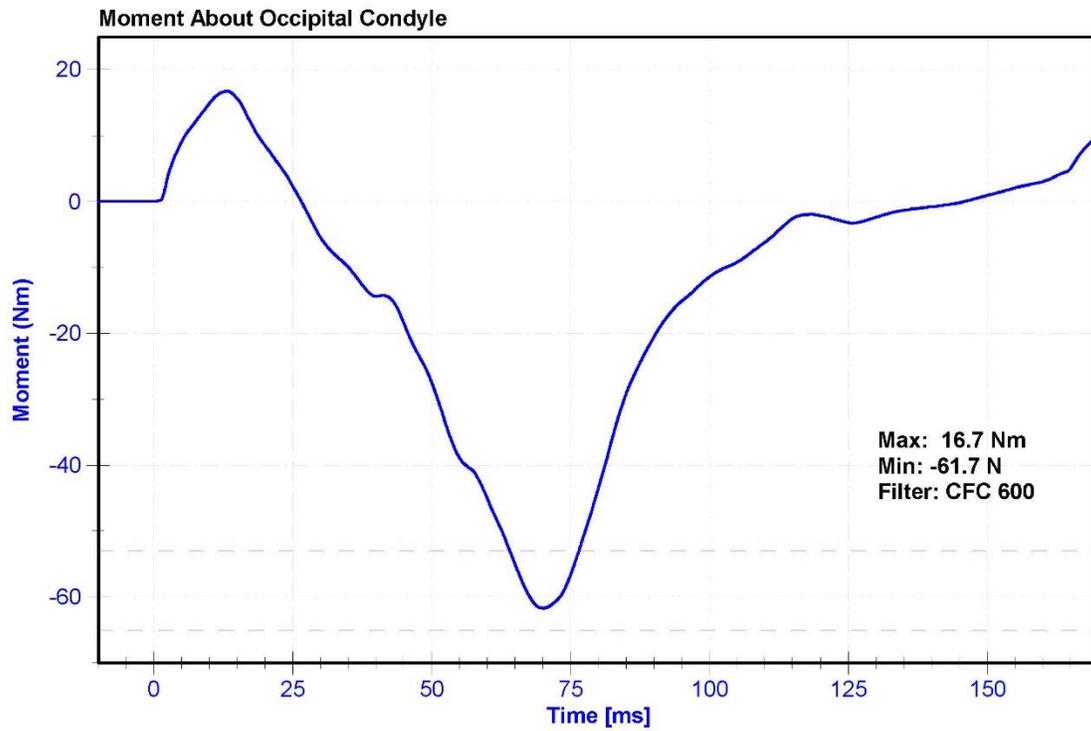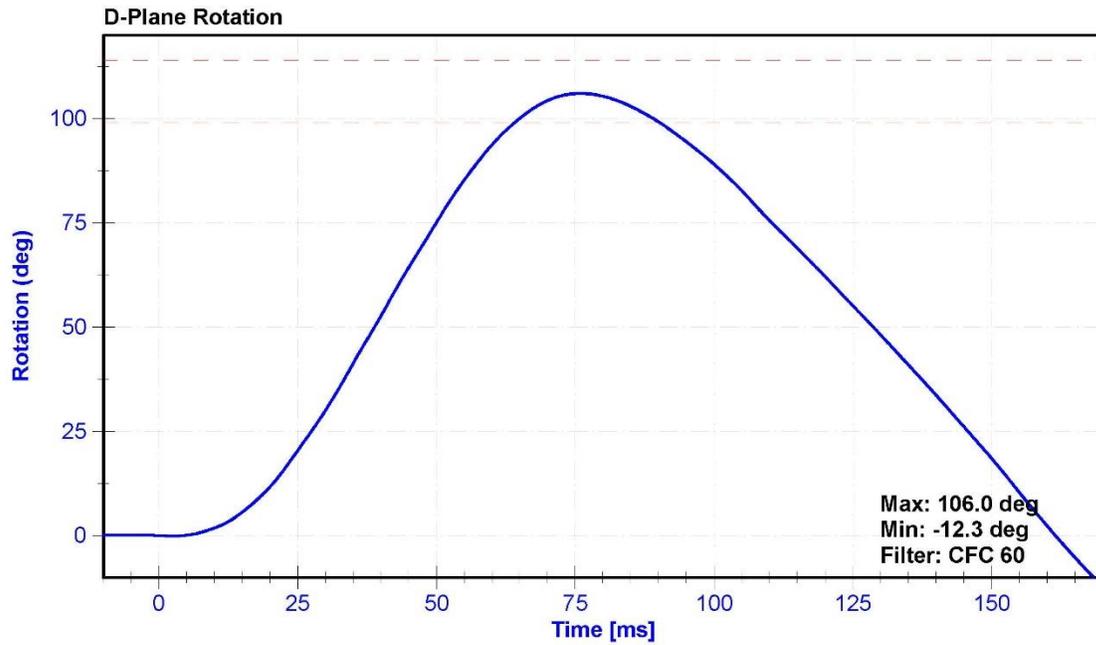

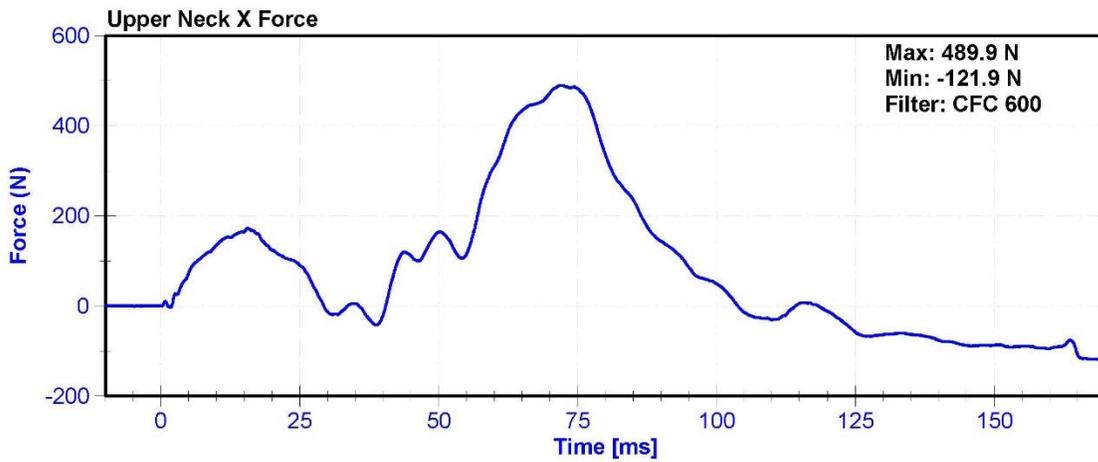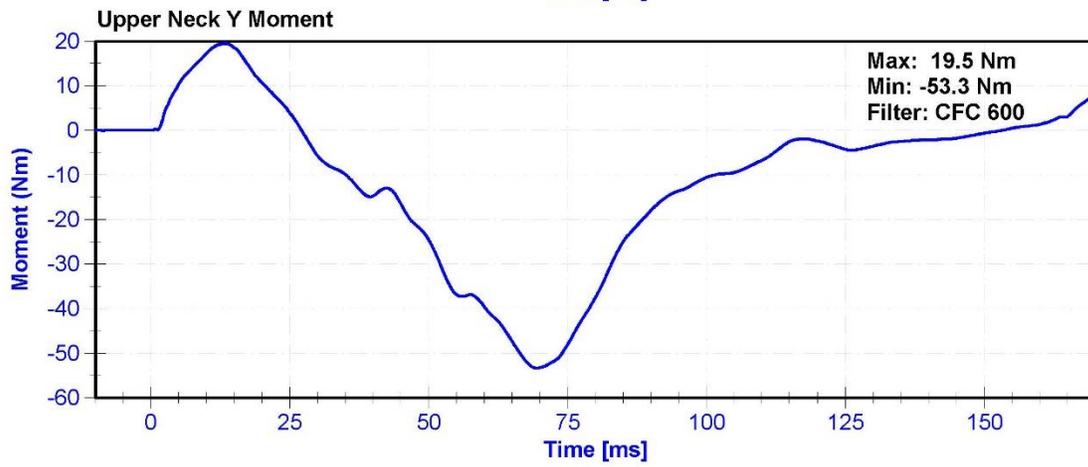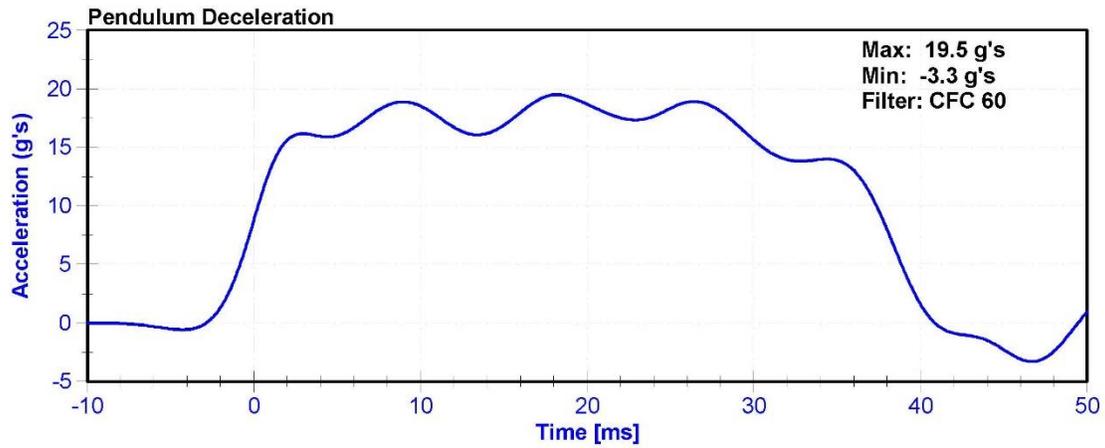


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	288	Laboratory Supervisor	M. Goehle



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.2	Pass
Humidity	10	70	%	43.5	Pass
Velocity	6.59	6.83	m/s	6.670	Pass
Chest Deflection	-58	-50	mm	-53.0	Pass
Maximum Resistive Force (50 to 58mm)	3900	4400	N	4280.7	Pass
Maximum Resistive Force (18 to 50mm)	0	4600	N	4258.1	Pass
Hysteresis	69	85	%	71.1	Pass


Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P16593	4/1/2016	4/1/2017
Chest Potentiometer	SERVO 14CB1-2897	DS-288	9/30/2016	9/30/2017

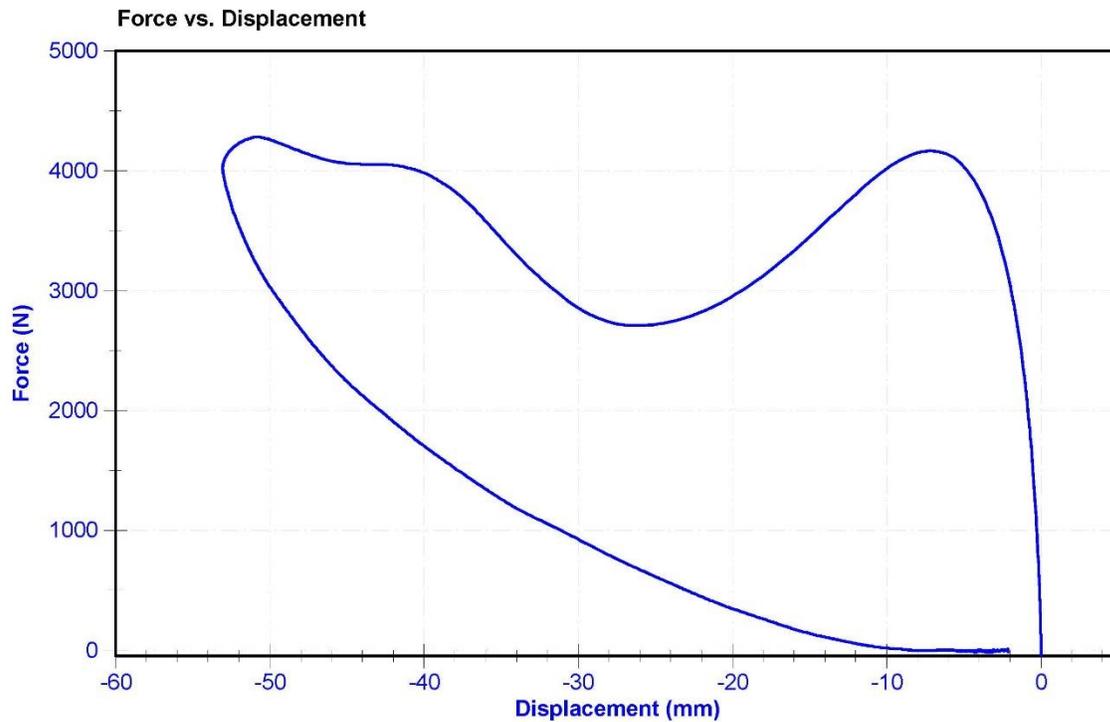


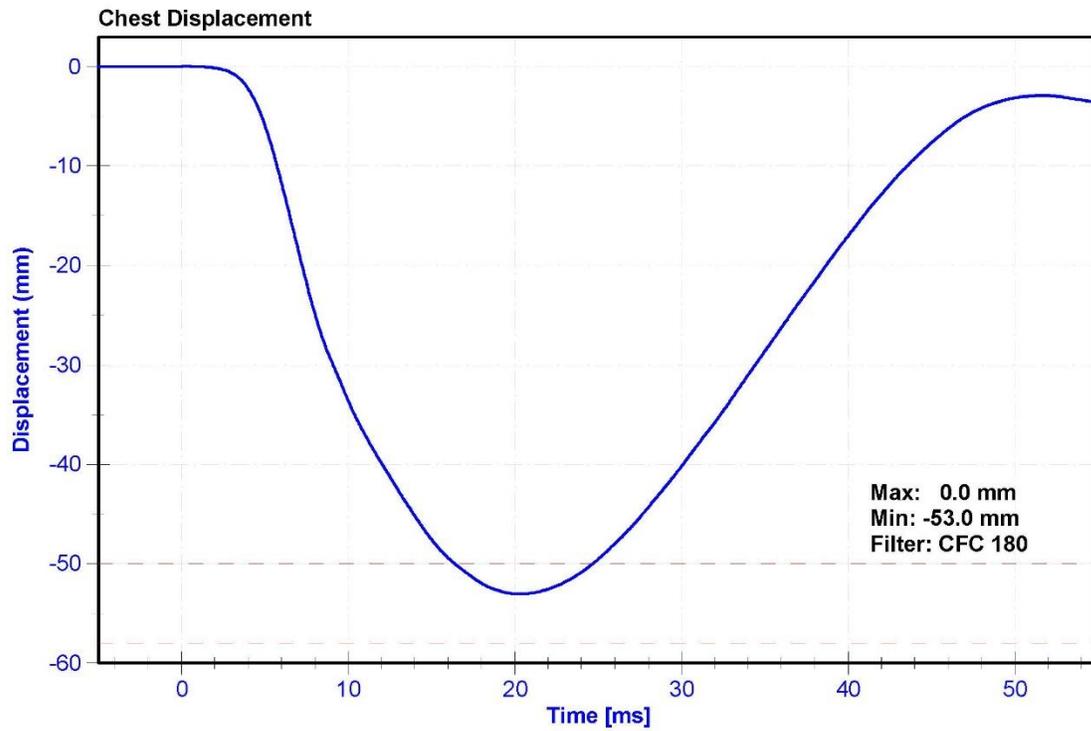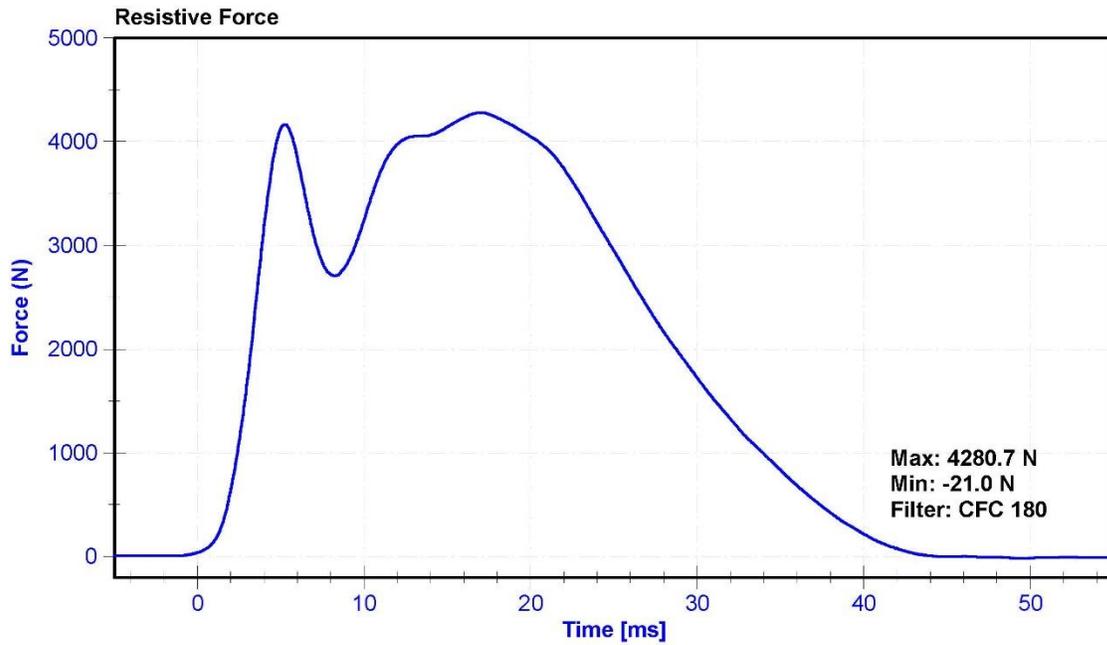

Probe Acceleration

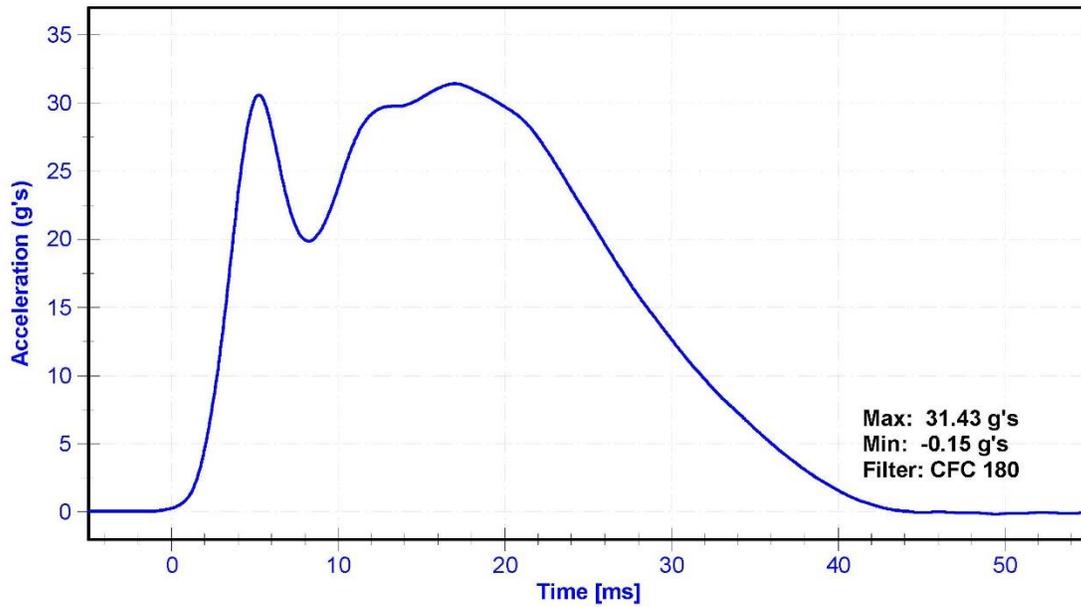

Change in Velocity (Integrated Acceleration)

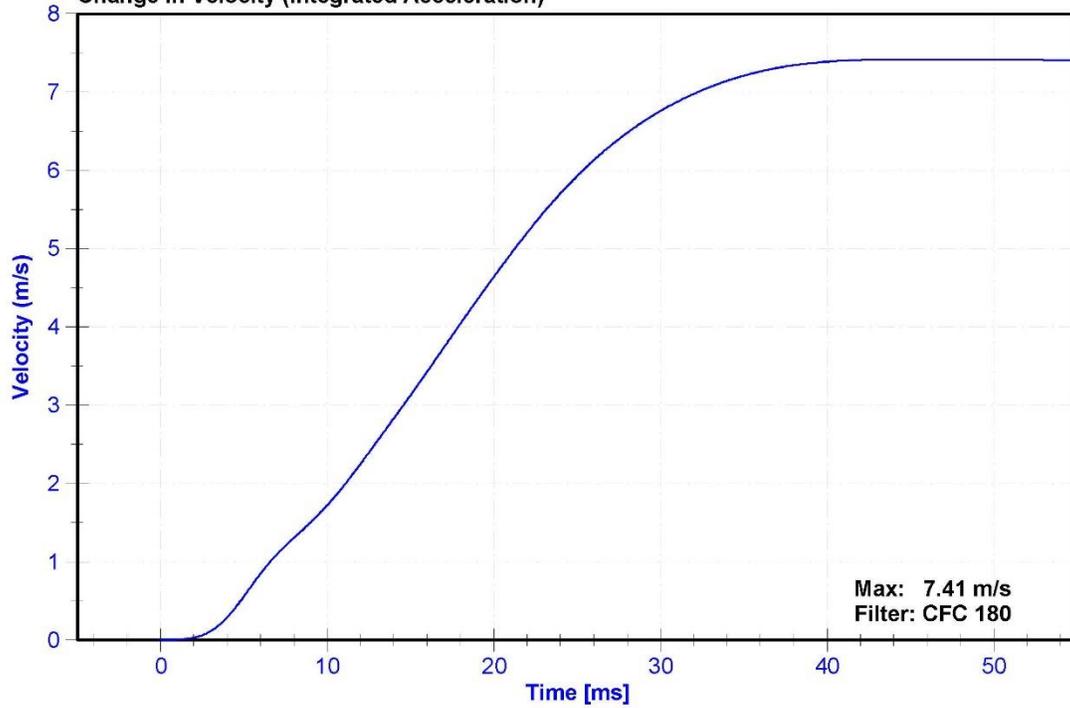


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	288	Laboratory Supervisor	M. Goehle

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.6	25.6	°C	21	Pass
Humidity	10	70	%	54	Pass
Initial Angle	0	20	deg	12.1	Pass
Force at 45 Degrees	320	390	N	366.2	Pass
Return Angle Relative to Initial	0	8	deg	5.5	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	Rieker N4C-1	DS-13051548	9/7/2016	9/7/2017
Load Cell	Interface SML-200	LC-493319	9/7/2016	9/7/2017

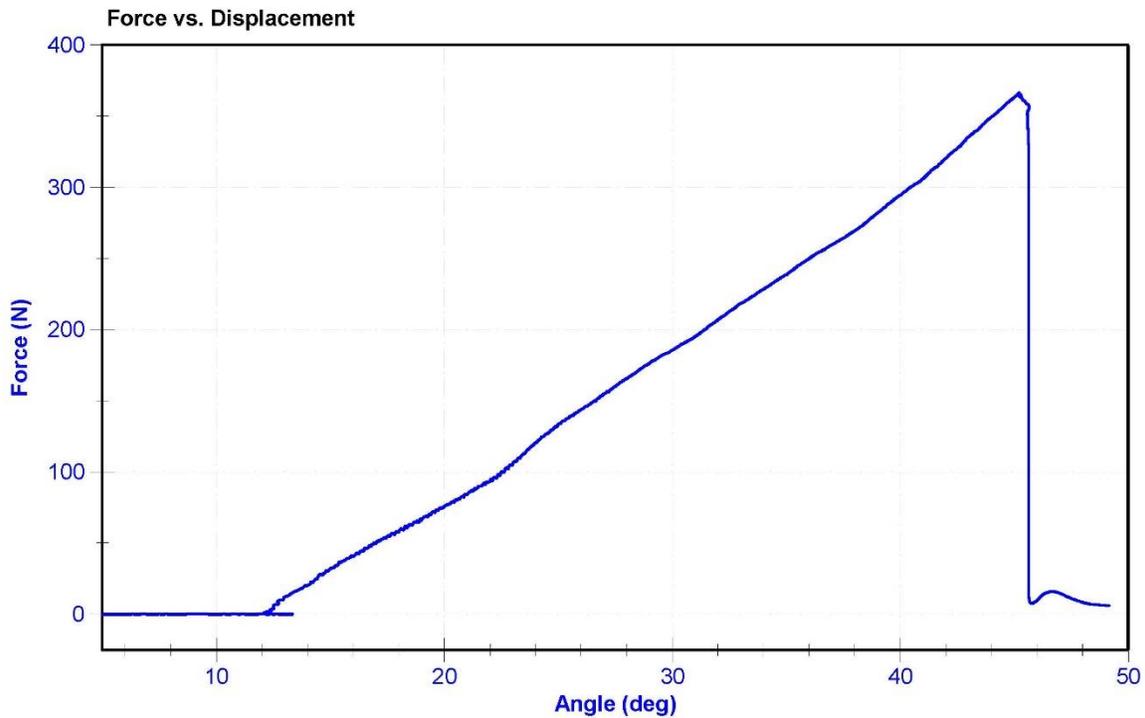


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	288	Laboratory Supervisor	M. Goehle



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	22.1	Pass
Humidity	10	70	%	46.8	Pass
Velocity	2.07	2.13	m/s	2.104	Pass
Resistive Force	3450	4060	N	3870.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P16593	4/1/2016	4/1/2017

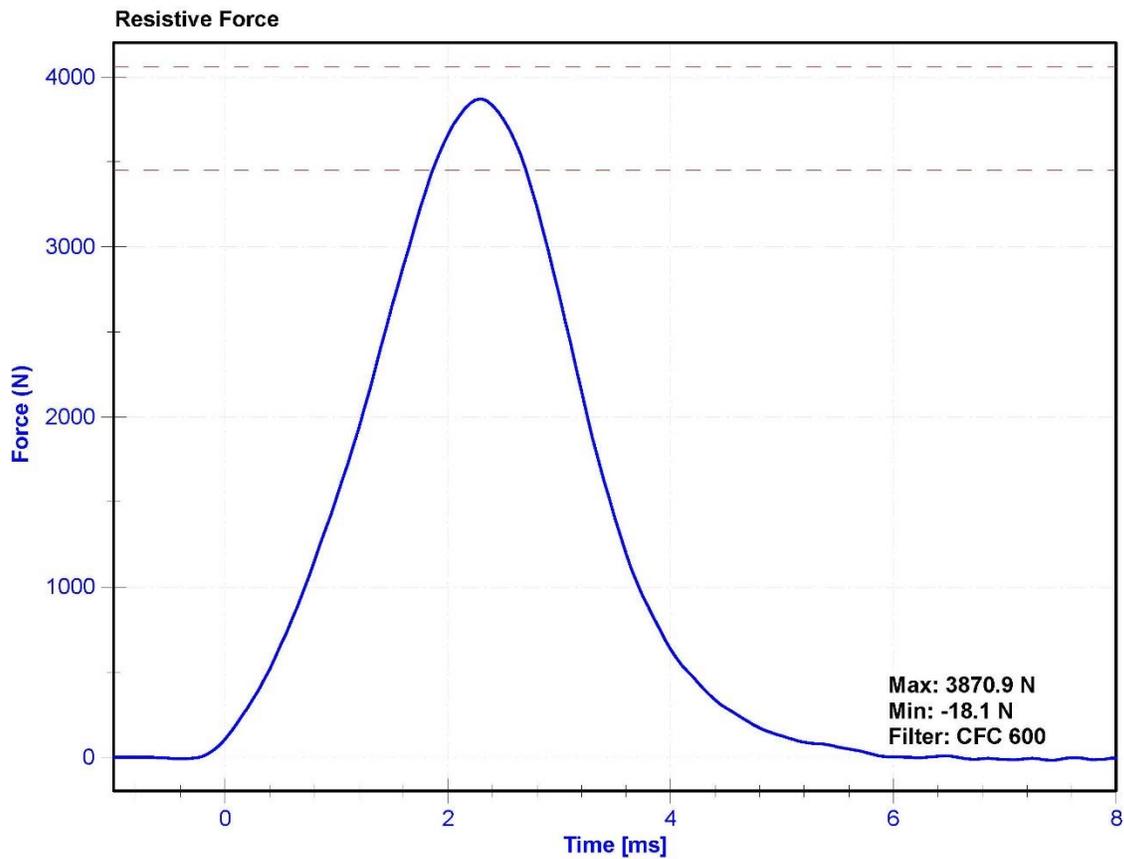

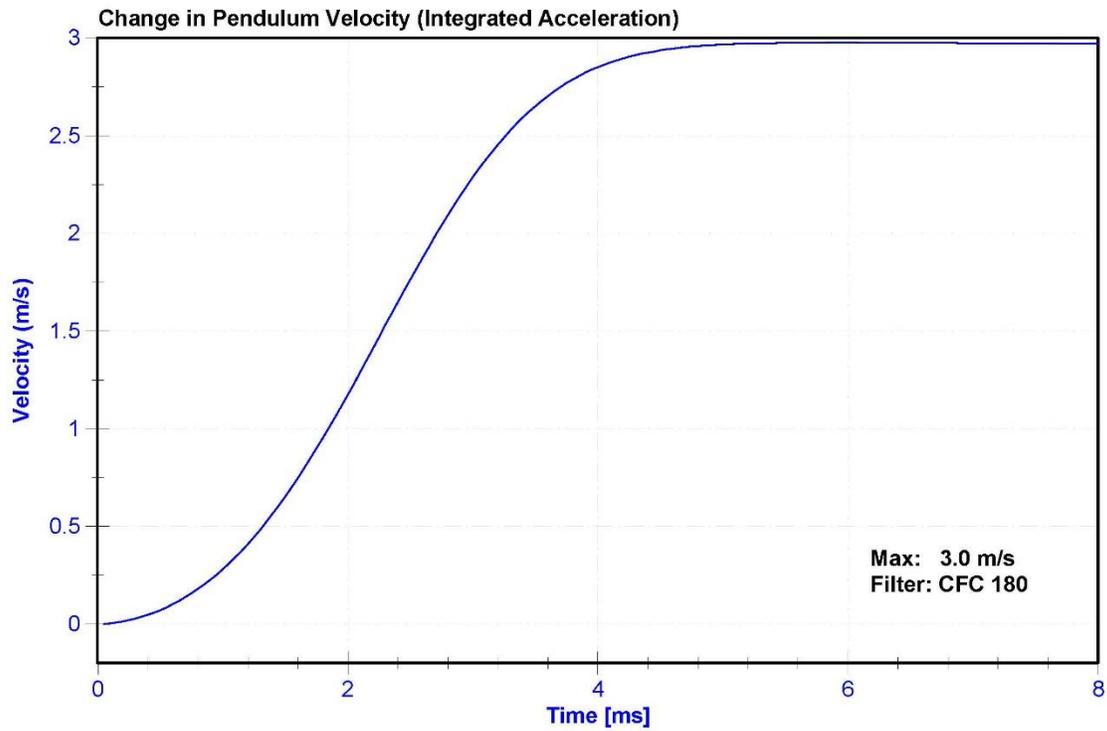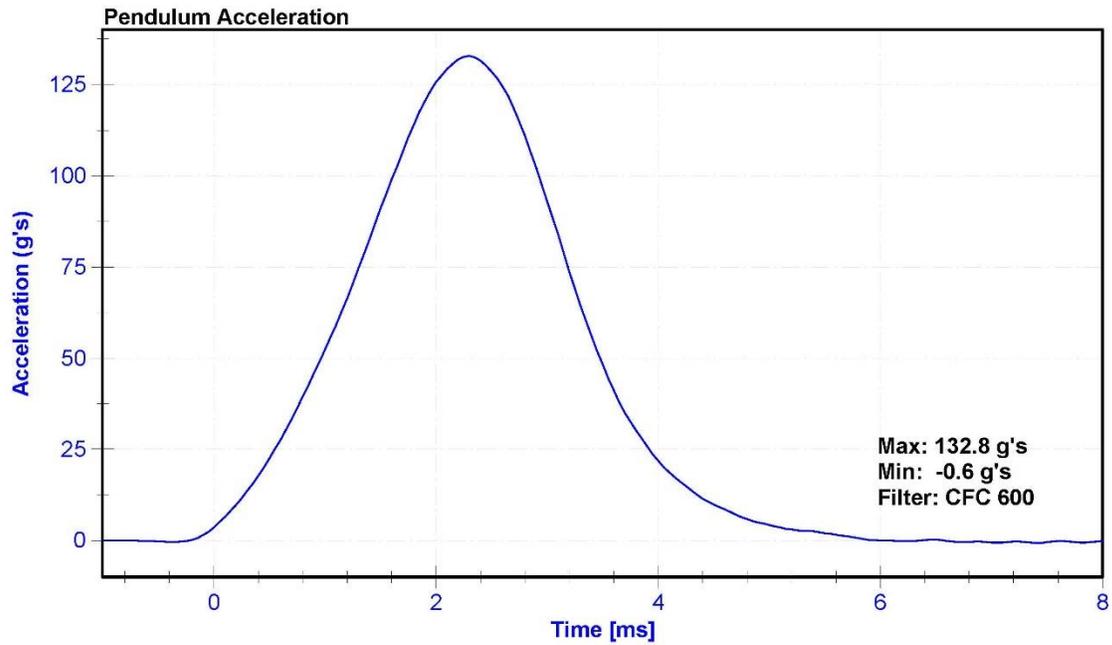

ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	288	Laboratory Supervisor	M. Goehle

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	22.1	Pass
Humidity	10	70	%	46.8	Pass
Velocity	2.07	2.13	m/s	2.105	Pass
Resistive Force	3450	4060	N	3980.3	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P16593	4/1/2016	4/1/2017

