

IMPORTANT NOTICE: Robert Bosch LLC and the manufacturers whose vehicles are accessible using the CDR System urge end users to use the latest production release of the Crash Data Retrieval system software when viewing, printing or exporting any retrieved data from within the CDR program. Using the latest version of the CDR software is the best way to ensure that retrieved data has been translated using the most current information provided by the manufacturers of the vehicles supported by this product.

CDR File Information

User Entered VIN	1G2ZG548254124632
User	
Case Number	
EDR Data Imaging Date	
Crash Date	
Filename	PONTIAC-G6-M50114-1G2ZG548254124632.CDR
Saved on	Tuesday, January 31 2006 at 05:05:01 PM
Collected with CDR version	Crash Data Retrieval Tool 2.800
Reported with CDR version	Crash Data Retrieval Tool 11.1
EDR Device Type	Airbag Control Module
Event(s) recovered	Deployment

Comments

No comments entered.

Data Limitations

Recorded Crash Events:

There are two types of recorded crash events. The first is the Non-Deployment Event. A Non-Deployment Event records data but does not deploy the air bag(s). The minimum SDM Recorded Vehicle Velocity Change, that is needed to record a Non-Deployment Event, is five MPH. A Non-Deployment Event may contain Pre-Crash and Crash data. The SDM can store up to one Non-Deployment Event. This event can be overwritten by an event that has a greater SDM recorded vehicle velocity change. This event will be cleared by the SDM, after approximately 250 ignition cycles. This event can be overwritten by a second Deployment Event, referred to as Deployment Event #2, if the Non-Deployment Event is not locked. The data in the Non-Deployment Event file will be locked, if the Non-Deployment Event occurred within five seconds of a Deployment Event. A locked Non Deployment Event cannot be overwritten or cleared by the SDM. The second type of SDM recorded crash event is the Deployment Event. It also may contain Pre-Crash and Crash data. The SDM can store up to two different Deployment Events. If a second Deployment Event occurs any time after the Deployment Event, the Deployment Event #2 will overwrite any non-locked Non-Deployment Event. Deployment Events cannot be overwritten or cleared by the SDM. Once the SDM has deployed an air bag, the SDM must be replaced.

Data:

- SDM Recorded Vehicle Velocity Change reflects the change in velocity that the sensing system experienced during the recorded portion of the event. SDM Recorded Vehicle Velocity Change is the change in velocity during the recording time and is not the speed the vehicle was traveling before the event, and is also not the Barrier Equivalent Velocity. For Deployment Events, the SDM can record up to 220 milliseconds of data after Deployment criteria is met and up to 70 milliseconds before Deployment criteria is met. For Non-Deployment Events, the SDM can record up to the first 300 milliseconds of data after algorithm enable. Velocity Change data is displayed in SAE sign convention.
- The CDR tool displays time from Algorithm Enable (AE) to time of Deployment command in a Deployment event and AE to time of maximum SDM recorded vehicle velocity change in a Non-Deployment event. Time from AE begins when the first air bag system enable threshold is met and ends when Deployment command criteria is met or at maximum SDM recorded vehicle velocity change. Air bag systems such as frontal, side, or rollover, may be a source of an enable. The time represented in a CDR report can be that of the enable of one air bag system to the Deployment time of another air bag system.
- Maximum Recorded Vehicle Velocity Change is the maximum square root value of the sum of the squares for the vehicle's combined "X" and "Y" axis change in velocity.
- Event Recording Complete will indicate if data from the recorded event has been fully written to the SDM memory or if it has been interrupted and not fully written.
- SDM Recorded Vehicle Speed accuracy can be affected by various factors, including but not limited to the following:
 - Significant changes in the tire's rolling radius
 - Final drive axle ratio changes
 - Wheel lockup and wheel slip
- Brake Switch Circuit Status indicates the open/closed state of the brake switch circuit.
- Pre-Crash data is recorded asynchronously. The 1.0 second Pre-crash data value (most recent recorded data point) is the data point last sampled before AE. That is to say, the last data point may have been captured just before AE but no

more than 1.0 second before AE. All subsequent Pre-crash data values are referenced from this data point.

-Pre-Crash Electronic Data Validity Check Status indicates "Data Invalid" if:

- The SDM receives a message with an "invalid" flag from the module sending the pre-crash data
- No data is received from the module sending the pre-crash data
- No module is present to send the pre-crash data

-Driver's and Passenger's Belt Switch Circuit Status indicates the status of the seat belt switch circuit, except: The Passenger Belt Switch Circuit Status for 2005 vehicles is available only on the Cadillac STS. The Passenger Belt Switch Circuit Status for 2006 Chevrolet Cobalt Sport Coupe (AP) model vehicles, with the option package that includes Recaro brand seats (RPO ALV), always reports a default value of "Buckled," because there is no passenger belt switch with the Recaro seat option. The Passenger Belt Switch Circuit Status for 2010 Chevrolet Cobalt and 2010 Pontiac G5 vehicles, with RPO Z49, will report a default value of "Buckled".

-The Time Between Non-Deployment to Deployment Events is displayed in seconds. If the time between the two events is greater than five seconds, "N/A" is displayed in place of the time. If the value is negative, then the Deployment Event occurred first. If the value is positive, then the Non-Deployment Event occurred first.

-If power to the SDM is lost during a crash event, all or part of the crash record may not be recorded.

-The ignition cycle counter relies upon the transitions through OFF->RUN->CRANK power-modifying messages, on the GMLAN communication bus, to increment the counter. Applying and removing of battery power to the module will not increment the ignition counter.

-Steering Wheel Angle data is displayed as a positive value when the steering wheel is turned to the right and a negative value when the steering wheel is turned to the left, except for Cadillac STS model vehicles with StabiliTrak 3.0 systems (RPO JL7). For Cadillac STS model vehicles with StabiliTrak 3.0 systems (RPO JL7), when the steering wheel is turned to the right, a negative value will be displayed and when the steering wheel is turned to the left, a positive value will be displayed. The Steering Wheel Angle data is reported in 16 degree increments.

-If more than one event is recorded, use the follow to determine which event the Multiple Event Data is associated with:

- If a Deployment event and not locked Non-Deployment event are recorded, the Multiple Event Data is associated with the Deployment event.
- If a Deployment event and a locked Non-Deployment event are recorded, then the Multiple Event Data is associated with both events.
- If a Deployment event and Deployment event #2 are recorded, then the Multiple Event Data is associated with both events.

-All data should be examined in conjunction with other available physical evidence from the vehicle and scene.

Data Source:

All SDM recorded data is measured, calculated, and stored internally, except for the following:

-Vehicle Status Data (Pre-Crash) is transmitted to the SDM, by various vehicle control modules, via the vehicle's communication network.

-The Belt Switch Circuit is wired directly to the SDM.

Hexadecimal Data:

Data that the vehicle manufacturer has specified for data retrieval is shown in the hexadecimal data section of the CDR report. The hexadecimal data section of the CDR report may contain data that is not translated by the CDR program.

The control module contains additional data that is not retrievable by the CDR tool.

01016_SDMEps_r005

Multiple Event Data

Associated Events Not Recorded	0
An Event(s) Preceded the Recorded Event(s)	No
An Event(s) was in Between the Recorded Event(s)	No
An Event(s) Followed the Recorded Event(s)	No
The Event(s) Not Recorded was a Deployment Event(s)	No
The Event(s) Not Recorded was a Non-Deployment Event(s)	No

System Status At AE

Vehicle Identification Number	**2ZG548*5*124632
Low Tire Pressure Warning Lamp (If Equipped)	OFF
Vehicle Power Mode Status	Run
Remote Start Status (If Equipped)	Inactive
Run/Crank Ignition Switch Logic Level	Active
Brake System Warning Lamp (If Equipped)	ON

System Status At 1 second

Transmission Range (If Equipped)	Neutral
Transmission Selector Position (If Equipped)	Neutral
Traction Control System Active (If Equipped)	No
Service Engine Soon (Non-Emission Related) Lamp	OFF
Service Vehicle Soon Lamp	ON
Outside Air Temperature (degrees F) (If Equipped)	63
Left Front Door Status (If Equipped)	Closed
Right Front Door Status (If Equipped)	Closed
Left Rear Door Status (If Equipped)	Unused
Right Rear Door Status (If Equipped)	Unused
Rear Door(s) Status (If Equipped)	Closed

Pre-crash data

Parameter	-2 sec	-1 sec
Reduced Engine Power Mode	OFF	OFF
Cruise Control Active (If Equipped)	No	No
Cruise Control Resume Switch Active (If Equipped)	No	No
Cruise Control Set Switch Active (If Equipped)	No	No


Pre-Crash Data

Parameter	-5 sec	-4 sec	-3 sec	-2 sec	-1 sec
Vehicle Speed (MPH)	34	34	34	34	35
Engine Speed (RPM)	0	0	0	0	0
Percent Throttle	1	1	1	1	1
Accelerator Pedal Position (percent)	7	7	7	7	7
Antilock Brake System Active (If Equipped)	No	No	No	No	No
Lateral Acceleration (feet/s ²)(If Equipped)	Invalid	Invalid	Invalid	Invalid	Invalid
Yaw Rate (degrees per second) (If Equipped)	Invalid	Invalid	Invalid	Invalid	Invalid


Parameter	-5 sec	-4 sec	-3 sec	-2 sec	-1 sec
Steering Wheel Angle (degrees) (If Equipped)	-16	-16	-16	-16	-16
Vehicle Dynamics Control Active (If Equipped)	Invalid	Invalid	Invalid	Invalid	Invalid

System Status At Deployment

Ignition Cycles At Investigation	42
SIR Warning Lamp Status	OFF
SIR Warning Lamp ON/OFF Time (seconds)	11450
Number of Ignition Cycles SIR Warning Lamp was ON/OFF Continuously	41
Ignition Cycles At Event	42
Ignition Cycles Since DTCs Were Last Cleared	38
Driver's Belt Switch Circuit Status	BUCKLED
Diagnostic Trouble Code at Event Enable, fault number: 1	N/A
Diagnostic Trouble Code at Event Enable, fault number: 2	N/A
Diagnostic Trouble Code at Event Enable, fault number: 3	N/A
Diagnostic Trouble Code at Event Enable, fault number: 4	N/A
Diagnostic Trouble Code at Event Enable, fault number: 5	N/A
Diagnostic Trouble Code at Event Enable, fault number: 6	N/A
Driver 1st Stage Time From Algorithm Enable to Deployment Command Criteria Met (msec)	12
Driver 2nd Stage Time From Algorithm Enable to Deployment Command Criteria Met (msec)	14
Passenger 1st Stage Time From Algorithm Enable to Deployment Command Criteria Met (msec)	12
Passenger 2nd Stage Time From Algorithm Enable to Deployment Command Criteria Met (msec)	14
Driver Side or Roof Rail/Head Curtain Time From Algorithm Enable to Deployment Command Criteria Met (msec)	N/A
Passenger Side or Roof Rail/Head Curtain Time From Algorithm Enable to Deployment Command Criteria Met (msec)	N/A
Time Between Events (sec)	0
Driver First Stage Deployment Loop Commanded	Yes
Driver Second Stage Deployment Loop Commanded	Yes
Driver Side Deployment Loop Commanded	No
Driver Pretensioner Deployment Loop Commanded	Yes
Driver (Initiator 1) Roof Rail/Head Curtain Loop Commanded	No
Driver (Initiator 2) Roof Rail/Head Curtain Loop Commanded	No
Driver Knee Deployment Loop Commanded	No
Passenger First Stage Deployment Loop Commanded	Yes
Passenger Second Stage Deployment Loop Commanded	Yes
Passenger Side Deployment Loop Commanded	No
Passenger Pretensioner Deployment Loop Commanded	Yes
Passenger (Initiator 1) Roof Rail/Head Curtain Loop Commanded	No
Passenger (Initiator 2) Roof Rail/Head Curtain Loop Commanded	No
Passenger Knee Deployment Loop Commanded	No
Driver Anchor Pretensioner Deployment Loop Commanded (If Equipped)	No
Second Row Left Pretensioner Deployment Loop Commanded	No
Third Row Left Roof Rail/Head Curtain Loop Commanded	No
Passenger Anchor Pretensioner Deployment Loop Commanded (If Equipped)	No
Second Row Right Pretensioner Deployment Loop Commanded	No
Third Row Right Roof Rail/Head Curtain Loop Commanded	No
Second Row Center Pretensioner Deployment Loop Commanded	No
Driver 2nd Stage Deployment Loop Commanded for Disposal	No
Passenger 2nd Stage Deployment Loop Commanded for Disposal	No
Crash Record Locked	Yes
Vehicle Event Data (Pre-Crash) Associated With This Event	Yes
Deployment Event Recorded in the Non-Deployment Record	No
Event Recording Complete	Yes

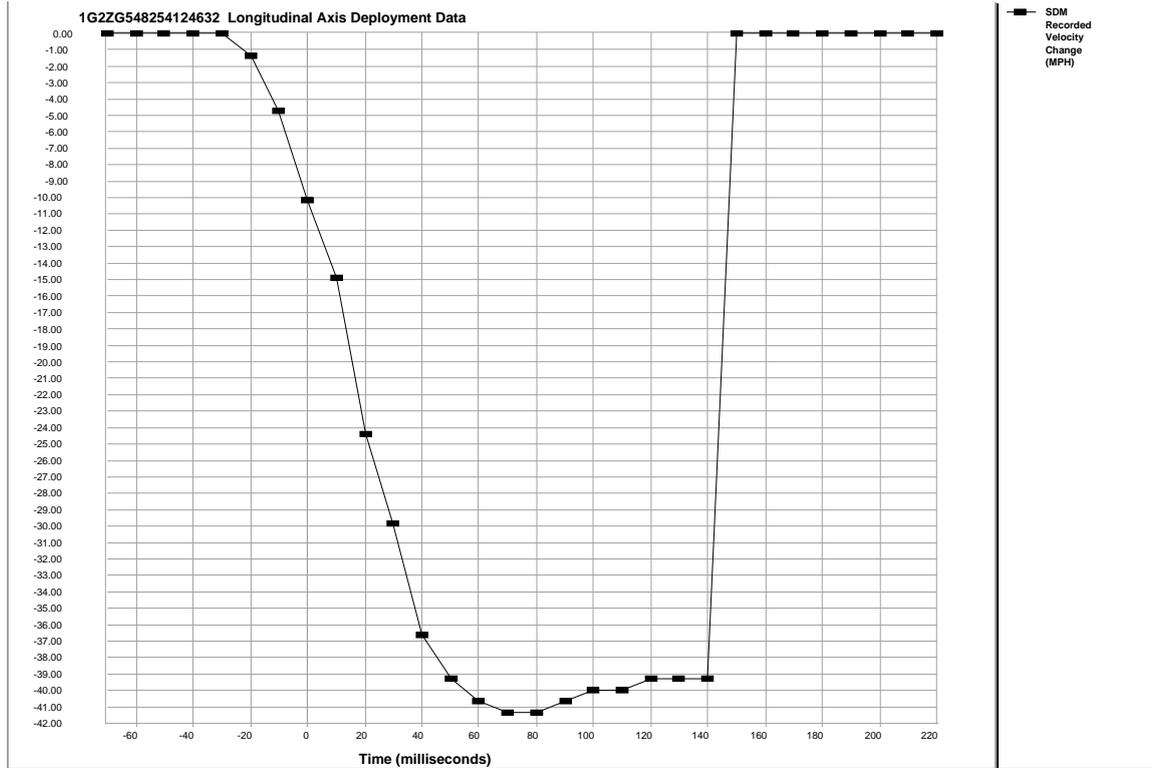

Time (milliseconds)	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70
SDM Longitudinal Axis Recorded Velocity Change (MPH)	0.00	0.00	0.00	0.00	0.00	-1.36	-4.74	-10.17	-14.91	-24.40	-29.82	-36.60	-39.31	-40.66	-41.34
Time (milliseconds)	80	90	100	110	120	130	140	150	160	170	180	190	200	210	220
SDM Longitudinal Axis Recorded Velocity Change (MPH)	-41.34	-40.66	-39.98	-39.98	-39.31	-39.31	-39.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

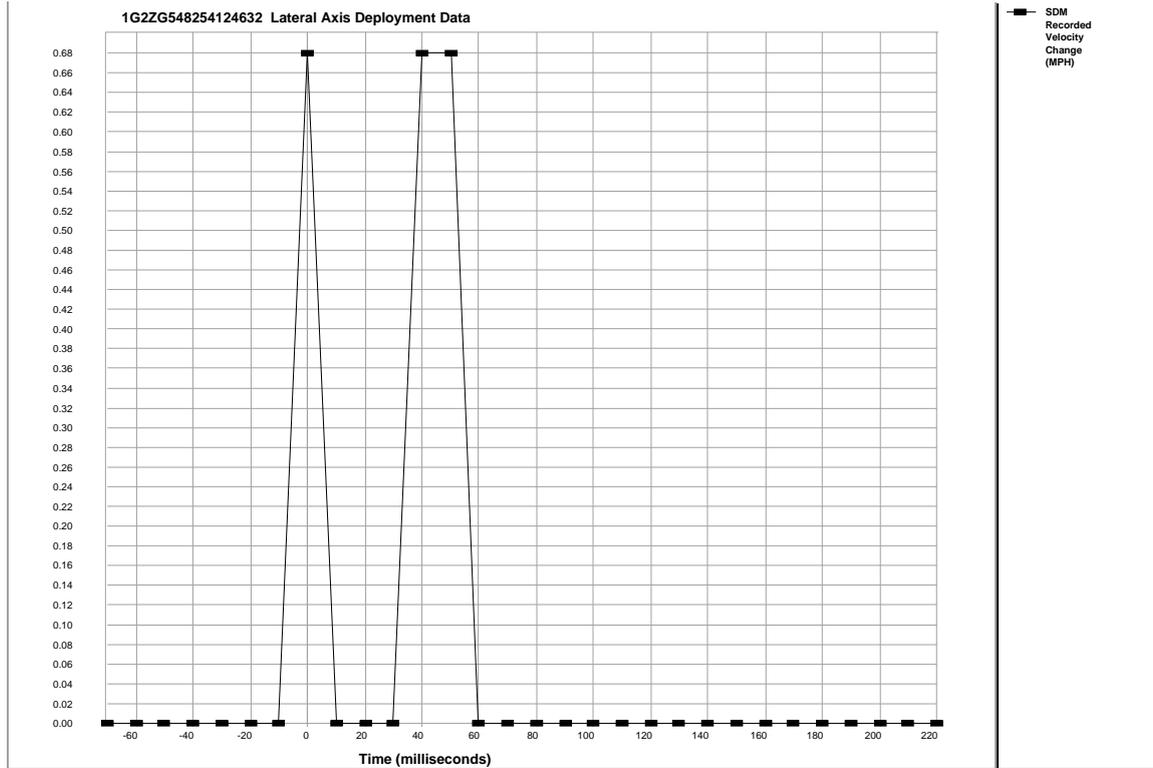

Time (milliseconds)	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70
SDM Lateral Axis Recorded Velocity Change (MPH)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.68	0.00	0.00	0.00	0.68	0.68	0.00	0.00
Time (milliseconds)	80	90	100	110	120	130	140	150	160	170	180	190	200	210	220
SDM Lateral Axis Recorded Velocity Change (MPH)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Hexadecimal Data

Data that the vehicle manufacturer has specified for data retrieval is shown in the hexadecimal data section of the CDR report. The hexadecimal data section of the CDR report may contain data that is not translated by the CDR program. The control module contains additional data that is not retrievable by the CDR system.

```
$01 08 00 00 00 00 00 00
$02 30 00 00 00 00 00 00
$03 00 00 00 00 00 00 00
$04 00 00 00 00 00 00 00
$05 00 00 00 00 00 00 00
$06 00 0A 00 03 0A 00 00
$07 00 20 00 00 00 00 00
$08 00 00 00 00 00 00 00
$09 00 00 00 00 00 00 00
$0A 00 00 00 00 00 00 00
$0B 00 00 0F 0F 03 00 00
$0C 00 00 00 00 00 00 00
$0D 00 00 40 00 00 00 00
$0E 00 00 00 00 00 00 00
$0F 00 00 00 00 00 00 00
$10 00 00 00 00 00 00 00
$11 00 00 00 00 00 00 00
$12 00 00 00 00 00 00 00
$13 00 00 00 00 00 00 00
$14 00 00 00 00 00 00 00
$15 00 00 00 00 00 00 00
$16 03 06 0C 16 34 00 00
$17 00 00 00 00 00 00 00
$18 00 00 00 00 00 00 00
$19 00 00 00 00 00 00 00
$1B FF 33 00 66 00 78 00
$1C FF 30 00 66 00 18 00
$1D 00 00 00 00 00 00 00
$1E 00 00 00 00 00 00 00
$1F 20 00 00 00 00 00 00
$20 40 00 00 00 00 00 00
$21 00 00 00 00 F0 00 00
$22 00 B4 00 00 00 00 00
$24 00 00 00 00 00 00 00
$25 00 00 00 00 00 00 00
$26 00 00 00 00 00 00 00
$27 FF 00 FF 00 00 00 00
$2A 00 00 00 00 00 00 00
$2B 00 00 00 00 00 00 00
$2D 00 00 00 00 00 00 00
$2E 00 04 66 00 29 00 00
$2F 00 26 00 2A 00 00 00
$30 9D 00 00 00 00 00 00
$31 11 11 11 11 11 00 00
$32 00 00 00 00 00 00 00
$33 03 03 03 03 03 00 00
$34 00 00 00 00 00 00 00
$35 38 37 36 37 37 00 00
$36 FF FF FF FF FF 00 00
$37 00 00 00 09 09 48 20
$38 72 00 40 00 03 C0 00
$39 00 00 00 00 00 80 00
$3A 00 00 00 00 00 80 00
$3B 03 06 0C 00 00 00 00
$3C 00 00 00 00 00 00 C0
```

```
$3D 32 5A 47 35 34 38 00
$3E 35 12 46 32 00 00 00
$3F 00 00 90 00 00 00 00
$40 00 00 00 00 00 00 00
$41 F8 F8 90 00 00 00 00
$42 80 FF FF FF FF 00 00
$43 FF FF FF 00 00 00 00
$44 FF FF FF FF FF FF 00
$45 FF FF FF FF FF FF 00
$46 FF FF FF FF FF FF 00
$47 FF FF FF FF FF FF 00
$48 FF FF FF FF FF FF 00
$49 FF FF FF FF FF FF 00
$4A FF FF FF FF FF FF 00
$4B FF FF FF FF FF FF 00
$4C FF FF FF FF FF FF 00
$4D FF FF FF FF FF FF 00
$4E FF FF FF FF FF FF 00
$4F FF FF FF FF FF FF 00
$50 FF FF FF FF FF FF 00
$51 F0 00 00 F0 00 00 00
$52 81 FF FF FF 00 00 00
$53 FF FF FF 00 00 00 00
$54 82 FF FF 00 00 00 00
$55 FF FF FF FF FF FF 00
$67 A0 A5 00 00 00 00 00
$68 D0 D0 00 00 00 00 00
$69 00 04 79 00 29 00 00
$6A 26 00 2A 00 00 00 00
$6B 00 00 00 00 00 00 00
$6C 00 00 00 00 00 00 00
$6D 00 00 00 00 00 00 00
$6E 00 00 00 00 00 00 00
$6F 00 00 00 00 00 FE 00
$70 00 F9 01 F1 00 EA 00
$71 00 DC 00 D4 01 CA 00
$72 01 C6 00 C4 00 C3 00
$73 00 C3 00 C4 00 C5 00
$74 00 C5 00 C6 00 C6 00
$75 00 C6 00 00 00 00 00
$76 00 00 00 00 00 00 00
$77 00 00 00 00 00 00 00
$78 F0 00 00 00 00 00 00
$79 80 00 00 00 00 00 00
$7A 80 00 00 00 00 00 00
$7B 06 07 06 07 00 00 00

$01 41 55 35 36 36 35 52 34 32 33 33 31 30 47 36 57
$02 41 05 94 61
$03 41 54 35 36 36 35 52 34 32 33 36 33 30 47 57 30
$04 41 05 94 61
$05 42 55 FF FF
$06 FF FF FF FF
$07 42 54 FF FF
$08 FF FF FF FF
$0D 41 48 35 36 36 36 52 34 32 35 37 33 31 57 48 57
$0E 01 5A 39 A4
$0F 41 4A 35 36 36 36 52 34 32 35 38 31 31 5A 32 45
$10 01 5A 39 A4
$13 42 52 FF FF
$14 FF FF FF FF
$17 42 54 FF FF
$18 FF FF FF FF
$21 31 12 66 1A 87 D3 91 9A
$22 56 63
```

```
$23 32 5A 46 47 48 4D 34
$24 32 5A 46 47 48 4D 34
$25 32 5A 46 47 48 4D 34
$26 32 5A 46 47 48 4D 34
$40 00 00
$41 FF 30 00 66 00 18
$42 10 C4
$43 00 00 8C 80
$44 C6 00 00 FC C0 C0
$45 07 01 07 01 05 01
$46 00 0F 0F 64 64
$47 0A 64 02 04 04 05 0A 06 04 0A 00 00 FA 00 00 FF 04 64
$48 18 08 08
$B0 58
$B1 FD FE 00
$B2 FF FF FF FF FF
$B4 41 53 35 36 36 33 32 33 30 31 55 45 20 20 20 20
$B7 50 AA 01 0F 01
$B8 53 42 67 10 17
$C1 30 46 30 31
$CA 30 46 30 31
$CB 00 9E 2A DF
$CC 00 9E 2A DF
$D1 00 00
$DB 00 00
$DC 00 00
```

Disclaimer of Liability

The users of the CDR product and reviewers of the CDR reports and exported data shall ensure that data and information supplied is applicable to the vehicle, vehicle's system(s) and the vehicle ECU. Robert Bosch LLC and all its directors, officers, employees and members shall not be liable for damages arising out of or related to incorrect, incomplete or misinterpreted software and/or data. Robert Bosch LLC expressly excludes all liability for incidental, consequential, special or punitive damages arising from or related to the CDR data, CDR software or use thereof.